

EL7LV

EL7LV-277; EL7LV-50

6" Low Voltage housing with thermal protector. Complete with 12 volt thermally protected magnetic transformer.


PROJECT INFORMATION:

Project Name: _____

Fixture Type: _____

Date: _____

DIMENSIONS

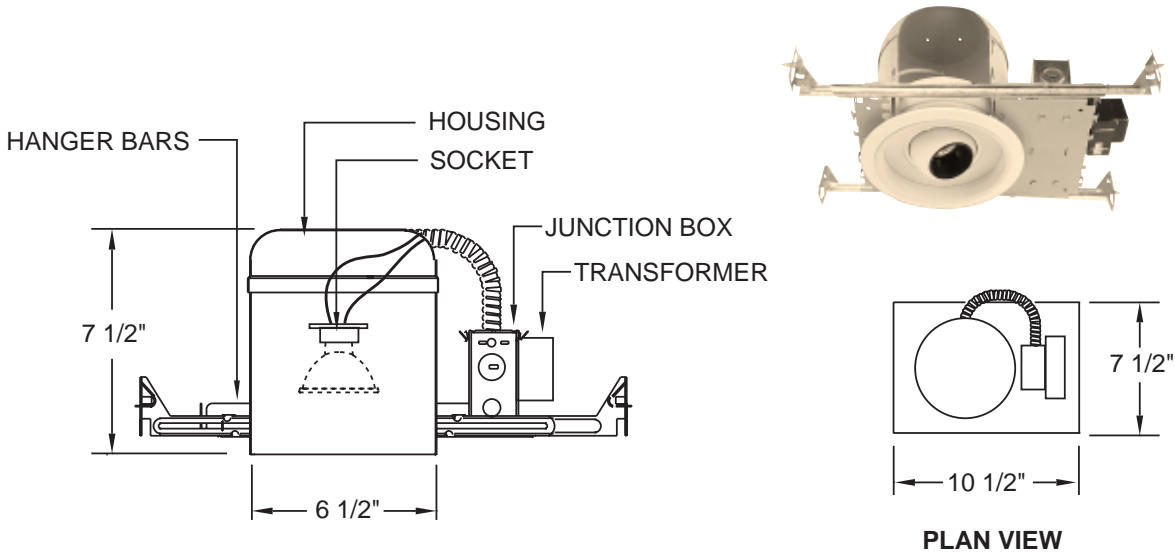

PRODUCT SPECIFICATIONS

Housing Features: Housing with thermal protector guards against improper lamping. Single wall construction.

Lamp: 12V, 75W Maximum; MR16 or PAR36

Lamp Holder: MR16 Socket.

Trim Ring: Polycarbonate trim ring, metal trim ring, designed to conceal ceiling cutout.

The EL7LV	=	12V
The EL7LV-277	=	277V TO 12V
THE EL7LV-50	=	50W MAX.

INSTALLATION

Junction Box: Pre-wired junction box provided with 1/2" and 3/4" knockout. U.L. listed/C.U.L. listed: for through branch wiring, maximum (8) No. 12 AWG branch circuit conductors (4 in, 4 out). Junction box provided with removable access plates.

Mounting: Hanger bars span 24" joists and can be repositioned 90 degrees.

Mounting Frame: Stamped steel material and painted for corrosion resistance.

Labels:

- U.L. listed for damp locations.
- U.L. listed for feed through.

CATALOG NUMBER

Example: EL7LV-EL2516C

See trims page for variety of trims available.