

Project n	ame
-----------	-----

Fixture type:

Date:

3" Koto Sylo™ Pendant Fixture

Works with Standard Koto™ LED Module, Koto™ Focus & Koto™ with 5-CCT Switch (Ordered Separately)



Features

- Works with Standard Koto[™] LED Module, Koto[™] Focus & Koto[™] with 5-CCT Switch (Ordered Separately)
- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Cable 120" long field-cuttable
- Fits 3 ½" and 4" Octagon and Round Junction boxes

Technical Details

Installation: Twist-On design for tool-less module installation, for use with Koto™ modules only.


Listings: cUL Listed for Damp Locations. RoHS Compliant. Meets Energy Star & California Title 24 JA8-2019 standards.

Warranty: ELCO Products are built to last with a 5-year Limited Warranty.

Options



Dimensions



Product Numbers

Item	Finish
EKS36PDW	All White
EKS36PDB	All Black
EKS36PDS	Silver

Product Number Builder Example: EKS36PDW


3″ Koto Sylo™ Pendant Fixture	Style	Finish
EKS36		
	PD Pendant	W All White
		B All Black
		S Silver

Compatible Products



For use with Dedicated 2" Koto Sylo™ Fixtures

Koto™LED Module

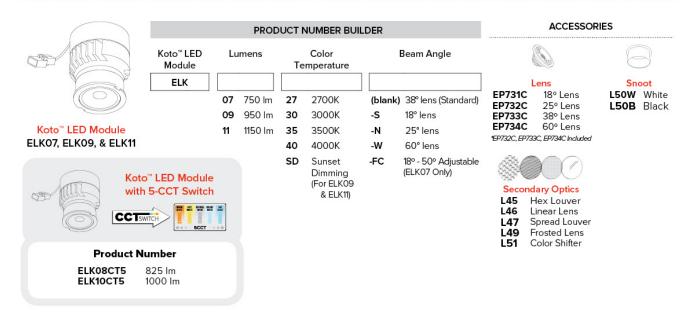

Junction Boxes for Koto Sylo™ Ceiling Mount Fixtures



Junction Box with Hanger Bars New Construction

CAT NO.	SPECIFICATIONS	
FI 14S	3 ¾" x 3 ¾" x 2 ¾"	



Junction Box without Hanger Bars New Construction

CAT NO.	SPECIFICATIONS
FL 1332	3 ¾" x 3 ¾" x 2 ¾"

Accessories



CAT NO SPECIFICATION

CAT NO.	SPECIFICATIONS
PSA38	Socket Adapter



4″ Hard Wire Adapter

CAT NO. SPECIFICATIONS
PSA38-4 4"

Other Compatible Junction Boxes



3 ½" & 4" Octagon Steel Junction Boxes

4" × 4" × 1 ½" 4" × 4" × 2 ½" 3 ½" × 3 ½" × 1 ½"



4" Round Surface Mount Box

4" O.D. x 11/2"



3 ½" Round Old Work (Non-Metallic)

4 1/4" O.D. x 3 1/2" I.D. x 2 5/8"



3 ½" & 4" Round New Work (Non-Metallic)

4" O.D. x 2 $\frac{3}{16}$ " 3 $\frac{1}{2}$ " O. D x 2 $\frac{3}{4}$ "

Compatible Products



For use with Dedicated 2" Koto Sylo™ Fixtures

2" Accessories



Emergency Battery Backup

CAT NO. SPECIFICATIONS

KEM-LD5 8W, 120/277V