

# 6" Ply Sylo™ Pendant

This unique Ply Sylo™ LED Pendant gives you the options you are looking for. Engineered with energy-efficient LED technology and dimming options for your project.




## Features

- Modern Pendant Die-Cast aluminum fixture for easy maintenance and upgrades
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", 60", 72" and 84")
- Fits 3 ½" and 4" Octagon and Round Junction boxes
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Soft white lens provides smooth lumen distribution and eliminates LED pixelation
- 90+ CRI for extremely accurate color rendering
- CA Title 24, ETL listed, ENERGY STAR, JA8-2022-E
- Life span of 50,000 hours L70

## Specifications

Wattage	15 MAX.W
Lumens	1000, 1500, 2000 lm
Voltage	120V
Color Temp.	2700K, 3000K, 3500K, 4000K, 5000K
Dimmable	Triac/ELV
Lamp Type	LED
CRI	90+
Wet Location	Listed

## Options

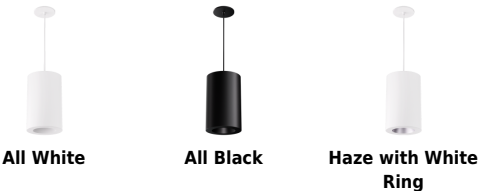

Integral EM Switch

## Technical Details

**Optics:** Frosted polycarbonate lens diffuses light evenly throughout while reducing glare with LED Array technology.

**Construction:** Integrated driver and light engine with quick connect. Diecast aluminum body with heat sink allows for efficient cooling. High quality powder coat finish preventing rust and paint cracking.

**Installation:** Included bracket mounts to 3 ½" and 4" Octagon and Round Junction boxes.

**Electrical:** Specifiable in 120V or 120/277V input . High Efficiency driver with a power factor > 0.9. Start time of less than .75 seconds.

**Emergency Battery Backup:** Integral EM Test Switch on Cylinder. The fixture becomes 120V only.


**LED Technology:** Extremely accurate Color Rendering Index of 90+. Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results. Superior Thermal Management by utilizing integrated heat sink. Instant On to Full Brightness technology. No LED pixelation.

**Dimmability:** Optional Triac/ELV or 0-10V dimming. For full list of dimmers, refer to the Dimmer Compatibility List. Industry-leading dimming that dims smoothly with no hot spots or flickering.

**Listings:** cUL Listed for Wet Locations. RoHS Compliant. Meets Energy Star & California Title 24 JA8-2019 standards.

**Warranty:** ELCO Products are built to last with a 5-year Limited Warranty.

## Dimensions



## Product Number

Item	Description	Lamp type	Lumens	CCT	Watts	Voltage	Dimming	Finish
EPD6371L3CT5BBEM	Emergency Battery Backup	LED	1000, 1500, 2000 lm	2700K, 3000K, 3500K, 4000K, 5000K	15 MAX.	120V	Triac/ELV	All Black

6" Ply Sylo™ Pendant	Dimming	Voltage	Lumen Output (Wattage)	Color Temp.	Color Finish	Length	Optional
EPD6							
	37 Triac/ELV <sup>1</sup> 85 0-10V <sup>2</sup>	1 120V U 120/277V <sup>3</sup>	L3 1000/1500/2000(14/18/24W) <sup>4</sup> 10 1000 lumen (15W) <sup>5, 6</sup>	CTS 2700K-5000K <sup>7</sup>	W All White BB All Black <sup>8</sup> HW White with Haze Reflector	120" Cable Mount <sup>9</sup> -12 12" Stem <sup>10</sup> -24 24" Stem <sup>10</sup> -36 36" Stem <sup>10</sup> -48 48" Stem <sup>10</sup> -60 60" Stem <sup>10</sup> -72 72" Stem <sup>10</sup> -84 84" Stem <sup>10</sup>	No Emergency Battery EM Em. battery 15W MAX. <sup>11</sup>

<sup>1</sup> Only available as 120V input  
<sup>2</sup> Only available as 120/277V input  
<sup>3</sup> Only available with LM3 Lumen Switch option  
<sup>4</sup> Lumen Switch located on module  
<sup>5</sup> Only available as Triac/ELV  
<sup>6</sup> Only available in White and Haze  
<sup>7</sup> Color Temperature Switch located on module  
<sup>8</sup> Only for L3 Option  
<sup>9</sup> 120 inch field cuttable cable  
<sup>10</sup> Stem is not field cuttable  
<sup>11</sup> The fixture becomes 120V only