

8" CFL Horizontal Downlight with Plaster Frame




Features

- Compact Fluorescent Housing with Plaster Frame.
- For (1) or (2) horizontally mounted lamps with integral electronic ballast.
- 6 5/8" ht allows use in 2x8 construction.
- Trim support adjusts 3/4" to accommodate different ceiling thicknesses.
- 24" captive hanger bars included.
- cUL Listed for damp location and for Feed Through.

Specifications

| | |
|---------------|----------|
| Wattage | 52W |
| Voltage | 120/277V |
| Lamp Type | CFL |
| Damp Location | Listed |

Dimensions

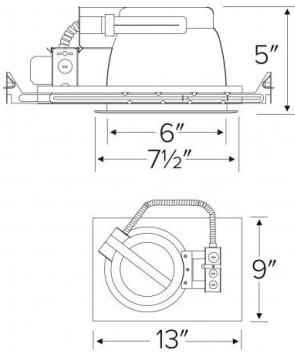

Product Numbers

| Item | Description | Lamp type | Watts | Voltage |
|---------|--|-----------|-------|----------|
| ELH226E | 8" CFL Horizontal Downlight with Plaster Frame | CFL | 52W | 120/277V |