

120/277/347V Elm™ System

LED Downlights with 5-CCT Switch

DESIGNED TO BE INSTALLED WITHOUT THE NEED FOR A HOUSING!

- Manual switch to desired CCT (2700K - 5000K)
- 120/277/347V - 0-10V/Triac/ELV dimmable driver
- IC Airtight for direct contact with insulation
- 90+ CRI
- Title 24 JA8-2019 Compliant
- Energy Star Compliant
- Life span of 50,000 hours L70
- New Construction application required mounting plate or frame. Remodel application requires no additional accessories




LED Recessed Gimbal Downlights with 5-CCT Switch

- Designed to fit plenums as shallow as 3"
- CCT Switch: 2700K, 3000K, 3500K, 4000K, 5000K
- Adjustable gimbal offers 25° tilt range
- Wet Location allows for use indoors or outdoors

4" ERT413CT5DXW 10W / 650 lm
5" O.D. - 3" Gimbal Diameter

6" ERT613CT5DXW 15W / 900 lm
7 1/2" O.D. - 4 5/8" Gimbal Diameter




LED Recessed Downlights with 5-CCT Switch

- Designed to fit plenums as shallow as 3"
- CCT Switch: 2700K, 3000K, 3500K, 4000K, 5000K
- Wet Location allows for use indoors or outdoors

4" ERT495CT5DXW 11W / 750 lm / 5 1/2" O.D. - 4" I.D.

6" ERT695CT5DXW 12W / 950 lm / 7 1/2" O.D. - 4 7/8" I.D.

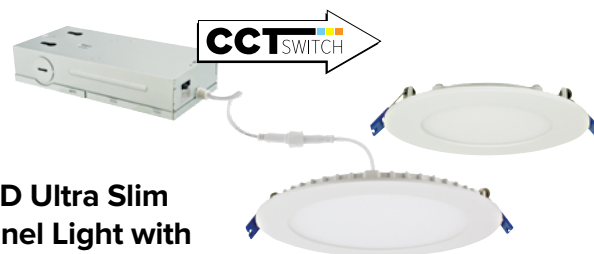

LED Ultra Slim Panel Light with 5-CCT Switch

- Designed to fit plenums as shallow as 2"
- CCT Switch: 2700K, 3000K, 3500K, 4000K, 5000K
- Wet Location allows for use indoors or outdoors

4" ERT41DXCT5W 12W / 750 lm / 4 15/16" O.D.

6" ERT61DXCT5W 15W / 950 lm / 6 3/4" O.D.

Subject to US tariffs. All other standards, terms and conditions apply.
Please provide your e-mail address to salesadmin@elcolighting.com. To unsubscribe e-mail: salesadmin@elcolighting.com



E-mail your order to: orderdesk@elcolighting.com
Tel: 800.522.2626 • Fax: 800.644.2626

ELCO Lighting
The Best Choice in Lighting

Elm™ System

LED Downlights In Stock!

Designed to be installed without the need for a housing and to fit in plenums as shallow as 3" • **IC Airtight** for direct contact with insulation
Includes dimmable driver and j-box • 90+ CRI • Energy Star Compliant • Title 24 JA8-2019 Compliant • Life span of 50,000 hours L70
New Construction application requires mounting plate or frame • Remodel applications require no additional accessories



High Lumen LED Downlights with 5-CCT & Lumen Switch



- CRI 90+, 120/277/347V 0-10V/Triac/ELV
- CCT Switch: 2700K, 3000K, 3500K, 4000K, 5000K
- 80° Standard beam angle
- Wet Location allows for use indoors or outdoors

4" ERT475CT5D (W, H, HW)	12/15/18/22/25W 1000/1250/1500/1800/2000 lm
6" ERT685CT5D (W, H, HW)	12/16/19/25/32W 1000/1250/1500/2000/2500 lm



4" LED Sloped Regressed Gimbal Downlight with 5-CCT Switch

- Adjustable Gimbal for Wall Wash & Sloped Ceiling
- CRI 90+, 120V Triac/ELV
- CCT Switch: 2700K, 3000K, 3500K, 4000K, 5000K
- 38° beam with 25° tilt and 360° rotation
- Wet Location for indoor use only
- 5 3/4" O.D.

ERT425CT5W All White, 8W, 510 lm

Elm™ System Frames & Accessories

Plaster Frames with Hanger Bars



E4LF1 4" Round
E6LF1 6" Round

Universal Frame



E246LF1 2", 4" & 6" Round

Mounting Plates



EMP4 4" Round
EMP6 6" Round

Extension Cables



ECNE10 10 inch cable
ECNE11 10 foot cable

Subject to US tariffs. All other standards, terms and conditions apply.
Please provide your e-mail address to salesadmin@elcolighting.com. To unsubscribe e-mail: salesadmin@elcolighting.com



E-mail your order to: orderdesk@elcolighting.com
Tel: **800.522.2626** • Fax: **800.644.2626**

ELCO Lighting
The Best Choice in Lighting