ELCO Lighting




New <u>High Lumen</u> Architectural **Koto**™ **LED Module**

Up to 1950 lumen output determined by Koto™ Architectural Housings

Works with 2″, 3″, 4″, & 6″ Koto™ Architectural Housings & Twist-On Trims



New Architectural Koto™ LED Module




- Koto[™] housings and twist-on trims • Driver on housing extends lifespan and allows
- for more dimming options and applications • Final lumen output is determined by housing
- Excellent color rendering 95+ CRI
- Standard 38° lens installed, 25° and 60° lens included with each module. Optional Lens: 18° (EP731C)
- ENERGY STAR Certified
- Title 24 JA8-2022 E-Compliant
- Life span of 50,000 hours L70
- Covered by U.S. PATENTS and Patents Pending
- Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Clear Lens (L48), Frosted Lens (L49), Snoot (L50), Color Shifter (L51)

ELK2427D	2700K / 1720 MAX. Im
ELK2430D	3000K / 1800 MAX. Im
ELK2435D	3500K / 1875 MAX. Im
ELK2440D	4000K / 1950 MAX. Im



For our entire selection of Koto[™] System Trims & Architectural Housings please visit us at *elcolighting.com*

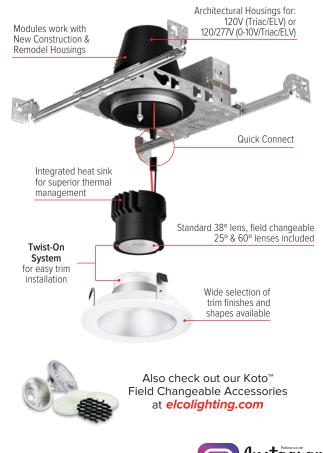

Subject to US tariffs. All other standards, terms and conditions apply. Please provide your e-mail address to salesadmin@elcolighting.com. To unsubscribe e-mail: salesadmin@elcolighting.com



E-mail your order to: orderdesk@elcolighting.com Tel: 800.522.2626 • Fax: 800.644.2626

