

Master Product Guide

April 2024

Who **We Are**

Founded in 1990 with a simple vision to make exceptional quality lighting at a fair market price. The last few decades have been a journey chasing that simple mission.



The Quality Choice

As a premiere luminaire manufacturer, with over sixty years of lighting experience, we know exactly what our customers want. That's why we use only the highest quality materials, and why we run our products through extensive tests before we add them to the ELCO family. When customers choose our lighting fixtures, they can rest assured they have chosen the best in functionality, design, performance, and quality.

The Timely Choice

Ordered today, shipped today. We at ELCO understand the importance of timing, so we send out almost all of our in-stock products the same day they are ordered. Our goal is to make timelines easier to hit and projects quicker to complete.

The Trusted Choice

With over 25 years in the lighting business, ELCO has become a trusted name throughout the country by doing the right thing. We stand behind every product we make. No exceptions. No excuses. It's a valuable trait that brings customers back again and again.

The Contractor's Choice

At ELCO, we design with the contractor in mind. Our packaging is easy to open, and our products are easy to install. This means a safe and orderly setup every time. Contractors feel confident choosing ELCO Lighting for their projects.

The Leading Choice

Both customers and competitors alike see ELCO as a leader in luminaire manufacturing. With many electrical engineers on site, we continue to be a pioneer in the world of illumination. Others may try to copy our designs, but they will never match our dedication to quality and service.

The Sustainable Choice

ELCO understands that lighting is a major contributor to energy consumption around the world. From the very beginning, we have engineered our products to be extremely efficient. Whether it's our CFL or LED product line, we strive to have a positive impact on energy use, one fixture at a time.

The Architect's Choice

We regularly talk with architects, and listen to their most pressing challenges. Not only do we go out of our way to save them time and money, we welcome their suggestions on how to improve our products. That's why architects specify ELCO for their projects.

Table of Contents

Recessed Lighting

The Oak™ System	5
The Teak™ System	10
The Koto™ System	14
The Alder™ System	41
The Mahogany™ System	44
3" LED Housings & Inserts	46
4" LED Housings & Inserts	47
5" & 6" LED Housings & Inserts	50
LED Specialty Retrofits	53
4" Housings for 2-Hour Fire Rated Ceilings	54
Fire Products & Emergency Battery Backups	56
Elm™ System	57
The Ply™ System	63
The Birch™ System	66
The Maple™ System	70
The Cedar™ System	72
The Laurel™ System	83
The Alpine™ System	91
4" Line Voltage	104
5" Line Voltage	109
6" Line Voltage	112
7" & 8" Incandescent	117
12" LED Retrofit	118
The Slant™ System	119



The Sylo™ Collection

Koto Sylo™ System	127
Ply Sylo™ System	135



Ceiling Mount Lighting

LED Sky™ Panels & Accessories	138
LED Disk Lights	140
Dustin™ & Darby™	141
LED Decorative Ceiling Lights	141



Track Lighting

Integrated LED Track Heads	143
Integrated LED Wall Wash Track Fixtures	146
MR16 Low Voltage Track Heads	147
MR16 GU10 Line Voltage Track Heads	153
120V Line Voltage Track Fixtures	154
Single & Two Circuit Track and Accessories	159
Pendant Lighting & Accessories	164



Undercabinet & Pucks Lighting

Lotus™ & Lotus II™ G2 LED Undercabinet	168
Zinnia™ LED Undercabinet Bar	169
Sage™ & Flax™ LED Undercabinet	170
Azalea™, Tansy™, & Ixia™ LED Undercabinet	171
LED Undercabinet Lightbars	172
12V Puck Light	173
24V DC Dimmers, 12V & 24V DC Drivers	174
T5 Fluorescent Undercabinet Lights	174



Exit & Emergency Lighting

Exit Signs & Emergency Lights	176
Accessories for Exit Signs & Emergency Lights	176



LED Wallpacks, Floodlights, In-Ground, Brick & Step Lights

LED Wall Packs & Wall Mount	178
LED Floodlights & Accessories	179
In-Ground LED Lighting	181
Trogon™ LED Brick Lights & Accessories	182
Incandescent Brick Lights & Accessories	182
Mini Moa™ LED Step Lights	183
Ibis™ Diecast LED Step Lights	183
Incandescent Step Lights	186



The Ambio™ Collection

24V Indoor LED Tape Lights & Accessories	188
RGB Indoor LED Tape Lights & Accessories	191
24V Damp Location LED Tape Lights	191
Sectional LED Tape Lights & Accessories	192
Aluminum Channels for LED Tape Lights	193
24V DC Drivers	194
Duralights & Accessories	195
LED Flat Rope Lights & Accessories	196
Magnetic & Electronic Transformers	196



General Accessories & Overstock Sale

Lamps, Socket Adapters & General Accessories	198
Fire Rated Products	203
Emergency Battery Backup & Accessories	204
ELCO Marketing Products	205





LED Recessed Lighting



1" Oak™ System	5	The ELM™ System	57
2" Teak™ System	10	The Ply™ System	63
The Koto™ System	14	The Birch™ System	66
The Alder™ System	41	The Maple™ System	70
The Mahogany™ System	44	The Cedar™ System	72
3" LED Housings & Inserts	46	The Laurel™ System	83
4" LED Housings & Inserts	47	The Alpine™ System	91
5" & 6" LED Housings & Inserts	50	4", 5", & 6" Line Voltage	104
LED Specialty Retrofits	53	7" & 8" Incandescent	117
4" Housings for 2-Hr Fire Rated Ceilings	54	12" LED Retrofit	118

The **Oak™ System**

1" Miniature **LED Downlights**

Up to 6 Oak™ fixtures can be daisy-chained to one **E1LDRV60**



New Construction Mounting Frame

Low Voltage Daisy-Chain Wiring


12V AC Input Operation

Easy Installation Auto-adjusting Clips


LED COB Light Engine

Precision Optics: 28°, 38° and 50°

Diecast Trims

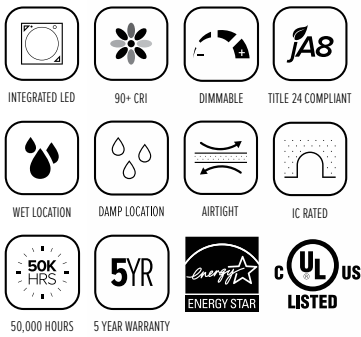

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY






Small Aperture, Big Light!

STYLES

FINISHES

LUMENS

COLOR TEMPERATURE

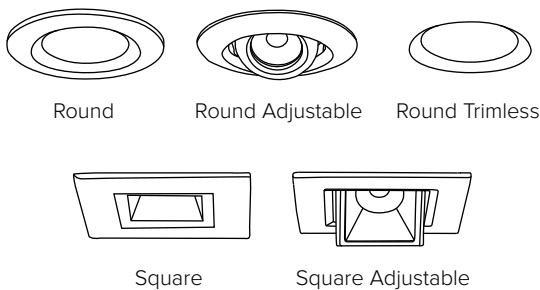


450 lm to 700 lm













2700K - 5000K & Sunset

The Oak™ System

1" Miniature LED Downlights




Recessed Downlight & Adjustable

Description		Cat. # / Specs				
		2700K 6W/600 lm	3000K 6W/625 lm	3500K 6W/650 lm	4000K 6W/675 lm	Sunset 6W/450 lm
 <p>1" Round Downlight</p>  <p>WET LOCATION</p>	E1L02F27W	E1L02F30W	E1L02F35W	E1L02F40W	E1L02FSDW	
	E1L02F27B	E1L02F30B	E1L02F35B	E1L02F40B	E1L02FSDB	
	E1L02F27BZ	E1L02F30BZ	E1L02F35BZ	E1L02F40BZ	E1L02FSDBZ	
	E1L02F27H	E1L02F30H	E1L02F35H	E1L02F40H	E1L02FSDH	
	E1L02F27BB	E1L02F30BB	E1L02F35BB	E1L02F40BB	E1L02FSDBB	
 <p>1" Round Gimbal</p>  <p>DAMP LOCATION</p>	6W/625 lm	6W/650 lm	6W/675 lm	6W/700 lm		
	E1L32F27W	E1L32F30W	E1L32F35W	E1L32F40W		
	E1L32F27B	E1L32F30B	E1L32F35B			
	E1L32F27BZ	E1L32F30BZ	E1L32F35BZ	E1L32F40BZ		
 <p>1" Square Downlight</p>  <p>WET LOCATION</p>	6W/600 lm	6W/625 lm	6W/650 lm	6W/675 lm	6W/450 lm	
	E1L12F27W	E1L12F30W	E1L12F35W	E1L12F40W	E1L12FSDW	
	E1L12F27B	E1L12F30B	E1L12F35B	E1L12F40B	E1L12FSDB	
	E1L12F27BZ	E1L12F30BZ	E1L12F35BZ	E1L12F40BZ	E1L12FSDBZ	
	E1L12F27H	E1L12F30H	E1L12F35H	E1L12F40H	E1L12FSDH	
	E1L12F27BB	E1L12F30BB	E1L12F35BB	E1L12F40BB	E1L12FSDBB	
 <p>1" Square Pull Down</p>  <p>DAMP LOCATION</p>	6W/625 lm	6W/650 lm		6W/700 lm		
	E1L22F27W	E1L22F30W		E1L22F40W		
	E1L22F27B	E1L22F30B				
	E1L22F27BZ	E1L22F30BZ				
 <p>1" Round Trimless Downlight</p> <p>NEW!</p>  <p>WET LOCATION</p>	6W/600 lm	6W/625 lm	6W/650 lm	6W/675 lm	6W/450 lm	
	E1L61F27W	E1L61F30W	E1L61F35W	E1L61F40W	E1L61FSDW	
	E1L61F27B	E1L61F30B	E1L61F35B	E1L61F40B	E1L61FSDB	
	E1L61F27BZ	E1L61F30BZ	E1L61F35BZ	E1L61F40BZ	E1L61FSDBZ	
E1L61F + EL01SFR	1" Round Spackle Frame (Sold Separately)	EL01SFR				

PRODUCT NUMBER BUILDER				
1" Oak™ Trim	Style	Beam Angle	Color Temperature	Finish
E1L				
	02 Round Downlight	F 38° (Standard)	27 2700K	W All White
	32 Round Gimbal	NF 28°	30 3000K	B Black/White
	12 Square Downlight	WF 50°	35 3500K	BZ All Bronze
	22 Square Pull Down		40 4000K	H Haze/White
	61 Round Trimless		SD Sunset (E1L02, E1L12, & E1L61)	BB All Black

The Oak™ System

1" Miniature LED Downlights



Mounting Frames

Description	CAT. #	Specs
<p>Optional Mounting Frame (Requires Transformer)</p>	E1LF1	For E1L02, E1L12 & E111 Series
	E1LF2	For E1L22 & E1L32 Series
	E2LF2	For E1L61 Series
<p>Optional Mounting Frame (Requires Transformer)</p>	E1LF1-M2	For E1L02, E1L12 & E111F Series
	E1LF1-M3	For E1L02, E1L12 & E111F Series
	E1LF1-M4	For E1L02, E1L12 & E111F Series
	E1LF1-M5	For E1L02, E1L12 & E111F Series
	E1LF2-M2	For E1L22 & E1L32 Series
	E1LF2-M3	For E1L22 & E1L32 Series
	E1LF2-M4	For E1L22 & E1L32 Series
<p>Optional R60 Housing for E1L02, E1L12 and E111F (Includes Transformer)</p> <p>Optional R60 Housing for E1L22 and E1L32 (Includes Transformer)</p>	E1LF1CAJ	Input: 120V, ELV Dimmable
	E1LF1CAJ-7	Input: 277V
	E1LF1CAJDX	Input: 120V, 0-10V Dimmable
	E1LF1CAJDX-7	Input: 277V, 0-10V Dimmable
	E1LF2CAJ	Input: 120V, ELV Dimmable
	E1LF2CAJ-7	Input: 277V
	E1LF2CAJDX	Input: 120V, 0-10V Dimmable
	E1LF2CAJDX-7	Input: 277V, 0-10V Dimmable

Accessories Power Supplies

Description	CAT. #	Specs
<p>Enclosed Electronic Transformer</p>	E1LDRV60	Input: 120V, Out: 12V AC
<p>Electronic Transformer</p>	LET-60	Input: 120V, Out: 12V AC, Side lead
	LET-60H	Input: 120V, Out: 12V AC, Bottom lead
	LET-60-277	Input: 277V, Out: 12V AC
<p>0-10V Dimmable Electronic Transformer</p>	LET-60DX	Input: 120V, Out: 12V AC
	LET-60DX-277	Input: 277V, Out: 12V AC
<p>Magnetic Transformer</p>	ETR12	50W, Daisy Chain 2-6
	ETR12-20	20W, Daisy Chain 1-3

Accessories Trims & Optional Lenses

Description	CAT. #	Specs
<p>Round Trim Ring (for use with E1L02 and E1L12 series)</p>	RM1W	All White
	RM1B	Black/White Ring
	RM1BZ	All Bronze
	RM1H	Haze/White Ring
	RM1BB	All Black
<p>Square Trim Ring (for use with E1L02 and E1L12 series)</p>	RM11W	All White
	RM11B	Black/White Ring
	RM11BZ	All Bronze
	RM11H	Haze/White Ring
<p>Field Changeable Optional Lens (for use with E1L02, E1L12 and E1L32 series)</p>	EP713C	28°
	EP715C	50°

The Architectural Oak™ System

1" Miniature LED Downlights with up to 1000 lumens



TITLE 24 COMPLIANT

DIMMABLE











93+ CRI

IC RATED

IN TODAY
OUT TODAY

50K HRS
50,000 HOURS

NEW! Recessed Downlight & Adjustable

Description		Cat. # / Specs				
		2700K 8W/850 lm	3000K 8W/900 lm	3500K 8W/950 lm	4000K 8W/1000 lm	Sunset 8W/850 lm
 <p>1" Round Architectural Downlight</p>  <p>WET LOCATION</p>	E1AK02F27W	E1AK02F30W	E1AK02F35W	E1AK02F40W	E1AK02FSDW	
	E1AK02F27B	E1AK02F30B	E1AK02F35B	E1AK02F40B	E1AK02FSDB	
	E1AK02F27BZ	E1AK02F30BZ	E1AK02F35BZ	E1AK02F40BZ	E1AK02FSDBZ	
	E1AK02F27H	E1AK02F30H	E1AK02F35H	E1AK02F40H	E1AK02FSDH	
	E1AK02F27BB	E1AK02F30BB	E1AK02F35BB	E1AK02F40BB	E1AK02FSDBB	
 <p>1" Round Architectural Gimbal</p>  <p>DAMP LOCATION</p>	8W/850 lm	8W/900 lm				
	E1AK32F27W	E1AK32F30W				
	E1AK32F27B	E1AK32F30B				
 <p>1" Square Architectural Downlight</p>  <p>WET LOCATION</p>	8W/850 lm	8W/900 lm	8W/950 lm	8W/1000 lm	8W/850 lm	
	E1AK12F27W	E1AK12F30W	E1AK12F35W	E1AK12F40W	E1AK12FSDW	
	E1AK12F27B	E1AK12F30B	E1AK12F35B	E1AK12F40B	E1AK12FSDB	
	E1AK12F27BZ	E1AK12F30BZ	E1AK12F35BZ	E1AK12F40BZ	E1AK12FSDBZ	
	E1AK12F27H	E1AK12F30H	E1AK12F35H	E1AK12F40H	E1AK12FSDH	
E1AK12F27BB	E1AK12F30BB	E1AK12F35BB	E1AK12F40BB	E1AK12FSDBB		
 <p>1" Square Architectural Pull Down</p>  <p>DAMP LOCATION</p>	8W/850 lm	8W/900 lm				
	E1AK22F27W	E1AK22F30W				
	E1AK22F27B	E1AK22F30B				
 <p>1" Round Architectural Trimless Downlight</p>  <p>WET LOCATION</p>	8W/850 lm	8W/900 lm	8W/950 lm	8W/1000 lm	8W/850 lm	
	E1AK61F27W	E1AK61F30W	E1AK61F35W	E1AK61F40W	E1AK61FSDW	
	E1AK61F27B	E1AK61F30B	E1AK61F35B	E1AK61F40B	E1AK61FSDB	
	E1AK61F27BZ	E1AK61F30BZ	E1AK61F35BZ	E1AK61F40BZ	E1AK61FSDBZ	
E1AK61F + EL01SFR	1" Round Spackle Frame (Sold Separately)	EL01SFR				

PRODUCT NUMBER BUILDER

1" Oak™ Architectural Trim	Style	Beam Angle	Color Temperature	Finish
E1AK				
	02 Round Downlight	F 38° (Standard)	27 2700K	W All White
	32 Round Gimbal	NF 28°	30 3000K	B Black/White
	12 Square Downlight	WF 50°	35 3500K	BZ All Bronze
	22 Square Pull Down		40 4000K	H Haze/White
	61 Round Trimless		SD Sunset <small>(E1AK02, E1AK12, & E1AK61)</small>	BB All Black

The Architectural Oak™ System

1" Miniature LED Downlights with up to 1000 lumens



NEW! Oak™ Architectural Housings & Frames


	Description	CAT. #	Specs
	R60 ICA New Construction Housings for E1AK02 and E1AK12 Downlights	E1DWN08AJIC	120V, Triac/ELV
		E1DWN08AJICDX	120/277V, 0-10V/Triac/ELV
	for E1AK22 and E1AK32 Adjustables	E1ATB08AJIC	120V, Triac/ELV
		E1ATB08AJICDX	120/277V, 0-10V/Triac/ELV
	for E1AK61 Trimless Downlights	E1TRL08AJIC	120V, Triac/ELV
		E1TRL08AJICDX	120/277V, 0-10V/Triac/ELV
	IC New Construction Frame for E1AK02 and E1AK12 Downlights	E1DWN08IC	120V, Triac/ELV
		E1DWN08ICDX	120/277V, 0-10V/Triac/ELV
	for E1AK22 and E1AK32 Adjustables	E1ATB08IC	120V, Triac/ELV
		E1ATB08ICDX	120/277V, 0-10V/Triac/ELV
	for E1AK61 Trimless Downlights	E1TRL08IC	120V, Triac/ELV
		E1TRL08ICDX	120/277V, 0-10V/Triac/ELV
	IC Remodel Power Pack for use with Architectural Oak Light Engines	E1LA08RIC	120V, Triac/ELV
		E1LA08RICD	120/277V, 0-10V/Triac/ELV
	Single Downlight Frame (Requires transformer)	E1LF1	For E1AK02 and E1AK12 Downlights
		E1LF2	For E1AK22 and E1AK32 Adjustables
		E2LF1	For E1AK61 Trimless Downlights
	Multiple Downlight Frames (Requires transformer) for E1AK02 and E1AK12 Downlights	E1LF1-M2	2 Set - frame Length: 8 3/4"
		E1LF1-M3	3 Set - frame Length: 13"
		E1LF1-M4	4 Set - frame Length: 17 1/2"
		E1LF1-M5	5 Set - frame Length: 21 3/4"
		E1LF2-M2	2 Set - frame Length: 8 3/4"
	for E1AK22 and E1AK32 Adjustables	E1LF2-M3	3 Set - frame Length: 13"
		E1LF2-M4	4 Set - frame Length: 17 1/2"
		E1LF2-M5	5 Set - frame Length: 21 3/4"
		E2LF2-M2	2 Set - frame Length: 8 3/4"
		E2LF2-M3	3 Set - frame Length: 13 1/8"
for E1AK61 Trimless Downlights	E2LF2-M4	4 Set - frame Length: 17 1/2"	
	E2LF2-M5	5 Set - frame Length: 21 7/8"	







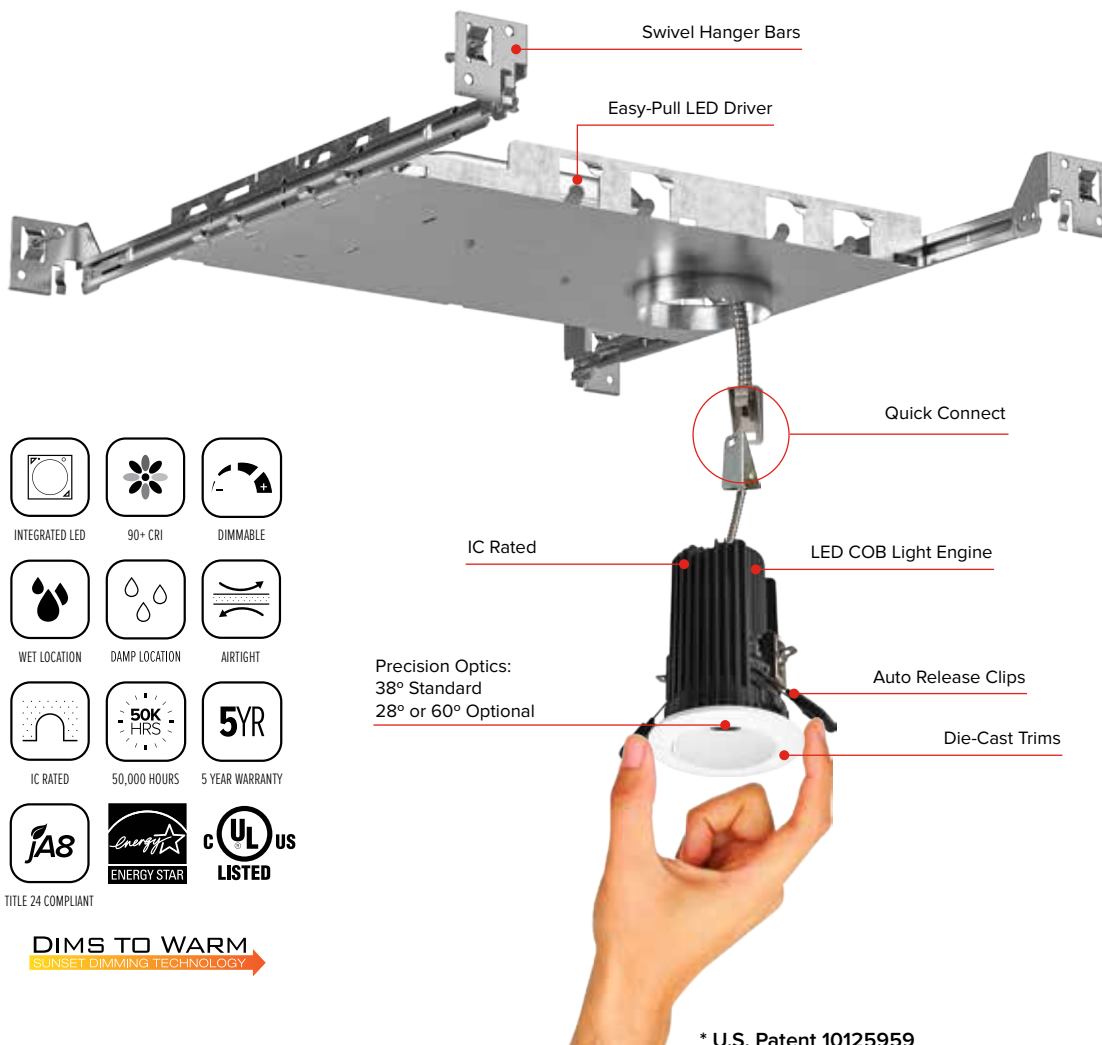


Accessories Trims & Optional Lenses

	Description	CAT. #	Specs
	Round Trim Ring (for use with E1AK02 and E1AK12 series)	RM1W	All White
		RM1B	Black/White Ring
		RM1BZ	All Bronze
		RM1H	Haze/White Ring
		RM1BB	All Black
	Square Trim Ring (for use with E1AK02 and E1AK12 series)	RM11W	All White
		RM11B	Black/White Ring
		RM11BZ	All Bronze
		RM11H	Haze/White Ring
		RM11BB	All Black
	Round Trimless Ring (for use with E1AK61 series)	RM1TLW	All White
		RM1TLB	All Black
		RM1TLBZ	All Bronze
	Field Changeable Optional Lens (for use with E1AK02, E1AK12 & E1AK32 series)	EP713C	28°
		EP714C	38°
		EP715C	50°
	Field Changeable Frosted Diffuser (for use with E1AK02, E1AK12 & E1AK32 series)	L60	For a softer light
	Field Changeable Hex Louver (for use with E1AK02, E1AK12 & E1AK32 series)	L61	For a better glare shield

The **Teak™** System













2" LED Downlights & Adjustables



-  INTEGRATED LED
-  90+ CRI
-  DIMMABLE
-  WET LOCATION
-  DAMP LOCATION
-  AIRTIGHT
-  IC RATED
-  50,000 HOURS
-  5YR
-  TITLE 24 COMPLIANT
-  ENERGY STAR
-  UL LISTED


DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

* U.S. Patent 10125959




STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 Round  Round Gimbal  Round Pull-Down  Square  Square Gimbal	 White  Black  Bronze  Haze  Chrome	 850 lm to 1100 lm	 2700K - 4000K & Sunset

The Teak™ System




2" LED Downlights & Adjustables



2" IC Rated Housings & Frames


Description	Cat. #	Specs
 <p>2" IC New Construction Frame with Driver</p>	E2L08ICA	10.5W, 850 lm, 120V
	E2L11ICA	12.5W, 1100 lm, 120V
	E2L08ICAD	10.5W, 850 lm, 120/277V
	E2L11ICAD	12.5W, 1100 lm, 120/277V
 <p>2" R60 IC New Construction Housing with Driver</p>	E2LAJ08ICA	10.5W, 850 lm, 120V
	E2LAJ11ICA	12.5W, 1100 lm, 120V
	E2LAJ08ICAD	10.5W, 850 lm, 120/277V
	E2LAJ11ICAD	12.5W, 1100 lm, 120/277V
 <p>2" IC Remodel Power Pack</p>	E2L08RIC	10.5W, 850 lm, 120V
	E2L11RIC	12.5W, 1100 lm, 120V
	E2L08RICD	10.5W, 850 lm, 120/277V
	E2L11RICD	12.5W, 1100 lm, 120/277V

Plaster Frames for Remodel Power Packs



Description	Cat. #	Specs
 <p>Single Cutout Plaster Frame</p>	E2LF1	Requires Power Pack
 <p>Large New Construction Frame</p>	E2LF2	Requires Power Pack
 <p>Multiple Cutout Plaster Frame For row mounting fixtures</p>	E2LF1-M2	2 Set
	E2LF1-M3	3 Set
	E2LF1-M4	4 Set
	E2LF1-M5	5 Set

The Teak™ System

2" LED Downlights & Adjustables




2" LED Light Engines



Description			Cat. # / Specs				
			2700K 10.5W - 12W 850/1100 lm	3000K 10.5W - 12W 850/1100 lm	3500K 10.5W - 12W 850/1100 lm	4000K 10.5W - 12W 850/1100 lm	Sunset 10.5W - 12W 800/1000 lm
 <p>2" Round Reflector</p>  <p>WET LOCATION</p>	E2L10F27W	E2L10F30W	E2L10F35W	E2L10F40W	E2L10FSDW		
	E2L10F27B	E2L10F30B	E2L10F35B	E2L10F40B	E2L10FSDB		
	E2L10F27BZ	E2L10F30BZ	E2L10F35BZ	E2L10F40BZ	E2L10FSDBZ		
	E2L10F27C	E2L10F30C	E2L10F35C	E2L10F40C	E2L10FSDC		
	E2L10F27H	E2L10F30H	E2L10F35H	E2L10F40H	E2L10FSDH		
	E2L10F27BB	E2L10F30BB	E2L10F35BB	E2L10F40BB	E2L10FSDBB		
 <p>2" Round Baffle</p>  <p>WET LOCATION</p>	E2L14F27W	E2L14F30W	E2L14F35W	E2L14F40W	E2L14FSDW		
	E2L14F27B	E2L14F30B	E2L14F35B	E2L14F40B	E2L14FSDB		
	E2L14F27BZ	E2L14F30BZ	E2L14F35BZ	E2L14F40BZ	E2L14FSDBZ		
	E2L14F27BB	E2L14F30BB	E2L14F35BB	E2L14F40BB	E2L14FSDBB		
	 <p>2" Square Reflector</p>  <p>WET LOCATION</p>	E2L13F27W	E2L13F30W	E2L13F35W	E2L13F40W	E2L13FSDW	
E2L13F27B		E2L13F30B	E2L13F35B	E2L13F40B	E2L13FSDB		
E2L13F27BZ		E2L13F30BZ	E2L13F35BZ	E2L13F40BZ	E2L13FSDBZ		
E2L13F27C		E2L13F30C	E2L13F35C	E2L13F40C	E2L13FSDC		
E2L13F27H		E2L13F30H	E2L13F35H	E2L13F40H	E2L13FSDH		
E2L13F27BB		E2L13F30BB	E2L13F35BB	E2L13F40BB	E2L13FSDBB		
 <p>2" Square Baffle</p>  <p>WET LOCATION</p>	E2L15F27W	E2L15F30W	E2L15F35W	E2L15F40W	E2L15FSDW		
	E2L15F27B	E2L15F30B	E2L15F35B	E2L15F40B	E2L15FSDB		
	E2L15F27BZ	E2L15F30BZ	E2L15F35BZ	E2L15F40BZ	E2L15FSDBZ		
	E2L15F27BB	E2L15F30BB	E2L15F35BB	E2L15F40BB	E2L15FSDBB		
	 <p>2" Round Adjustable</p>  <p>DAMP LOCATION</p>	E2L18F27W	E2L18F30W	E2L18F35W	E2L18F40W		
E2L18F27B		E2L18F30B	E2L18F35B	E2L18F40B			
E2L18F27BZ		E2L18F30BZ		E2L18F40BZ			
 <p>2" Square Adjustable</p>  <p>DAMP LOCATION</p>	E2L19F27W	E2L19F30W		E2L19F40W			
	E2L19F27B	E2L19F30B		E2L19F40B			
	E2L19F27BZ	E2L19F30BZ		E2L19F40BZ			

The Teak™ System

2" LED Downlights & Adjustables







2" LED Light Engines

Description	Cat. # / Specs			
	2700K 10.5W - 12W 850/1100 lm	3000K 10.5W - 12W 850/1100 lm	3500K 10.5W - 12W 850/1100 lm	4000K 10.5W - 12W 850/1100 lm
 <p>2" Round Pull Down</p>  <p>DAMP LOCATION</p>	E2L97F27W	E2L97F30W	E2L97F35W	E2L97F40W
	E2L97F27B	E2L97F30B	E2L97F35B	E2L97F40B
	E2L97F27BZ	E2L97F30BZ	E2L97F35BZ	E2L97F40BZ


PRODUCT NUMBER BUILDER

2" Teak™ Light Engine	Style	Beam Angle	Color Temperature	Finish
E2L	<p>10 Round Reflector</p> <p>14 Round Baffle</p> <p>18 Round Adjustable</p> <p>97 Round Pull Down</p> <p>13 Square Reflector</p> <p>15 Square Baffle</p> <p>19 Square Adjustable</p>	<p>F 38° (Standard)</p> <p>NF 28°</p> <p>WF 60°</p>	<p>27 2700K</p> <p>30 3000K</p> <p>35 3500K</p> <p>40 4000K</p> <p>SD Sunset</p>	<p>W All White</p> <p>B Black/White</p> <p>BZ All Bronze</p> <p>C Chrome/White</p> <p>H Haze/White</p> <p>BB All Black</p>

Accessories Interchangeable Trims

Description	CAT. #	Specs
 <p>2" Flexa Round Ring (For use with E2L10, E2L13, E2L14, and E2L15 Series)</p>	RM2W	White
	RM2B	Black
	RM2BZ	Bronze
 <p>Reflector for 2" Flexa Round Ring (For use with RM2)</p>	PR2W	White
	PR2B	Black
	PR2BZ	Bronze
	PR2C	Chrome
	PR2H	Haze
 <p>2" Flexa Square Ring (For use with E2L10, E2L13, E2L14, and E2L15 Series)</p>	RM22W	White
	RM22B	Black
	RM22BZ	Bronze
 <p>Reflector for 2" Flexa Square Ring (For use with RM22)</p>	PR22W	White
	PR22B	Black
	PR22BZ	Bronze

Accessories Optional Lenses

Description	CAT. #	Specs
 <p>Field Changeable Optional Lens</p>	EP716C	28°
	EP717C	38°
	EP718C	60°

The Koto™ System

Koto™ Module & Twist-On Trims



IC Airtight for direct contact with insulation



Swivel Hanger Bars

Quick Connect

Integral Driver for easy maintenance and upgrades

Includes: Standard 38° lens, field changeable 28° and 60° lenses
Optional: 18° lens available


Twist-On System

Trims with Twist-On System

Die-Cast Aluminum Trims in a variety of shapes, colors and styles to match any room design



TITLE 24 COMPLIANT DIMMABLE



INTEGRATED LED WET LOCATION



50,000 HOURS 5 YEAR WARRANTY



90+ CRI



Twist-On System for easy trim installation



Covered by U.S. PATENTS and Patents Pending





SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
<p>2"</p>	<p>Round (Reflector, Baffle, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)</p>	<p>White</p> <p>Black</p> <p>Bronze</p> <p>Nickel</p> <p>Haze</p> <p>Chrome</p>	<p>720 lm to 1690 lm</p>	<p>2400K - 5000K & Sunset</p>
<p>3"</p>	<p>Square (Reflector, Adjustable, Pinhole, Slot Aperture, Wall Wash, & Trimless)</p>	<p>White</p> <p>Black</p> <p>Bronze</p> <p>Nickel</p> <p>Haze</p> <p>Chrome</p>	<p>720 lm to 1690 lm</p>	<p>2400K - 5000K & Sunset</p>
<p>4"</p>				
<p>6"</p>				

The Koto™ System

2" Aperture Module with Twist-On Trims



Standard Koto™ LED Module & Housings











Description	CAT. #	Specs
 <p>Koto™ LED Module Standard 38° Lens, with 25° & 60° lenses included</p> <p>Optional Lenses: 18° (EP731C)</p> <p>Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Frosted Diffuser (L49), Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)</p> <p>Optional Reflectors: 15° (EP735C), 25° (EP736C), 38° (EP737C), 60° (EP738C)</p>	NEW!	ELK0724 10.5W, 730 lm, 2400K, 120V
		ELK0727 10.5W, 770 lm, 2700K, 120V
		ELK0730 10.5W, 800 lm, 3000K, 120V
		ELK0735 10.5W, 830 lm, 3500K, 120V
		ELK0740 10.5W, 860 lm, 4000K, 120V
		ELK0924 10.5W, 900 lm, 2400K, 120V
		ELK0927 10.5W, 940 lm, 2700K, 120V
		ELK0930 10.5W, 990 lm, 3000K, 120V
		ELK0935 10.5W, 1040 lm, 3500K, 120V
		ELK0940 10.5W, 1100 lm, 4000K, 120V
		ELK09SD 10.5W, 940 lm, Sunset, 120V
		ELK1124 12.5W, 1060 lm, 2400K, 120V
		ELK1127 12.5W, 1100 lm, 2700K, 120V
		ELK1130 12.5W, 1150 lm, 3000K, 120V
	ELK1135 12.5W, 1200 lm, 3500K, 120V	
	ELK1140 12.5W, 1260 lm, 4000K, 120V	
	NEW!	ELK11HC 12.5W, 1050 lm, Human Centric, 120V
	ELK11SD 12.5W, 1050 lm, Sunset, 120V	
	ELK1327 12.5W, 1250 lm, 2700K, 120V	
	NEW!	ELK1330 12.5W, 1300 lm, 3000K, 120V
	ELK1335 12.5W, 1350 lm, 3500K, 120V	
	ELK1340 12.5W, 1400 lm, 4000K, 120V	
 <p>10° Koto™ LED Module (Narrow Spot) Includes 38° lens installed, and field changeable 10° & 25° lenses included.</p> <p>NEW!</p> <p>10° Koto™ LED Module (Narrow Spot) Includes 10° lens installed, and field changeable 25° & 38° lenses included.</p>		ELK0327 5W, 350 lm, 2700K, 120V
		ELK0330 5W, 350 lm, 3000K, 120V
		ELK0827-NSP 10.5W, 850 lm, 2700K, 120V
 <p>Koto™ 5-CCT LED Module Switch to desire Color Temperature: 2700K, 3000K, 3500K, 4000K, 5000K</p> <p>CCT SWITCH</p>		ELK0830-NSP 10.5W, 850 lm, 3000K, 120V
		ELK08CT5 10.5W, 825 lm, 120V, 2700K - 5000K
		ELK10CT5 12.5W, 1000 lm, 120V, 2700K - 5000K
 <p>Koto™ FOCUS LED Module 18° - 50° Adjustable Focus with a simple twist of the lens.</p> <p>Includes white snoot installed on module and field changeable black snoot.</p> <p>TWIST & LOCK</p>		ELK0727-FC 10.5W, 770 lm, 2700K, 120V
		ELK0730-FC 10.5W, 800 lm, 3000K, 120V
		ELK0735-FC 10.5W, 830 lm, 3500K, 120V
		ELK0740-FC 10.5W, 860 lm, 4000K, 120V
		ELK07SD-FC 10.5W, 720 lm, Sunset, 120V

The Koto™ System

2" Aperture Module with Twist-On Trims



Standard Koto™ LED Module & Housings













Description	CAT. #	Specs
 <p>MAX. Adjustability IC Airtight New Construction Housing</p>	EL276ICA	2" Housing
	EL386ICA	3" Housing
	EL485ICA	4" Housing
 <p>Standard IC Airtight New Construction Housing</p>	EL390ICA	3" Housing
	EL390ICA-EM5	3" Housing, Emergency Battery Back-Up
	EL490ICA	4" Housing
	EL490ICA-EM5	4" Housing, Emergency Battery Back-Up
	EL570ICA	5" Housing
	EL570ICA-EM5	5" Housing, Emergency Battery Back-Up
	EL770ICA	6" Housing
 <p>Shallow IC Airtight New Construction Housing</p>	EL492ICA	4" Shallow Housing
	EL560ICA	5" Shallow Housing
	EL760ICA	6" Shallow Housing
 <p>Standard IC Airtight Remodel Housing</p>	EL760ICA-EM5	6" Housing, Emergency Battery Back-Up
	EL390RICA	3" Housing
	EL490RICA	4" Housing
	EL570RICA	5" Housing
 <p>Shallow IC Airtight Remodel Housing</p>	EL770RICA	6" Housing
	EL560RICA	5" Shallow Housing
 <p>R-60 Foam Insulation Dedicated LED IC Airtight New Construction Housing</p>	EL760RICA	6" Shallow Housing
	EL490AJICA	4" Housing
 <p>2-Hour Fire Rated ICA New Construction Housing (Sound Rated)</p>	EL490AJICA-EM7	4" Housing, Emergency Battery Back-Up
	EL39FICA	3" Housing
	EL48FICA	4" Housing
	EL56FICA	5" Housing
 <p>Shallow 2-Hour Fire Rated ICA New Construction Housing (Sound Rated)</p>	EL76FICA	6" Housing
	EL75FICAS	6" Shallow Housing
 <p>4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>	NEW!	
	EJB4ICA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings.
<p>A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714</p>	EJB4ICA-EM	Housing with Emergency Battery Back-Up
	EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs
 <p>4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>	EJB4RICA-EM	Housing with Emergency Battery Back-Up
	ELJ4OV	For use with EJB4RICA to cover tabs

The Koto™ System

2" Aperture Module with Twist-On Trims



120/277V, 0-10V/Triac/ELV Koto™ LED Module & Housings








Description	CAT. #	Specs
 <p>120/277V, 0-10V/Triac/ELV Koto™ LED Module Includes 38° lens installed, and field changeable 25° & 60° lens included.</p> 	ELK10DX27	11.8W, 1000 lm, 2700K, 120/277V
	ELK10DX30	11.8W, 1000 lm, 3000K, 120/277V
	ELK10DX35	11.8W, 1000 lm, 3500K, 120/277V
	ELK10DX40	11.8W, 1000 lm, 4000K, 120/277V
	ELK10DXSD	11.8W, 1000 lm, Sunset, 120/277V
 <p>MAX. Adjustability 0-10V IC Airtight New Construction Housing</p>	EL276ICDXA	2" Housing
	EL386ICDXA	3" Housing
	EL485ICDXA	4" Housing
 <p>Standard 0-10V IC Airtight New Construction Housing</p>	EL390ICDXA	3" Housing
	EL390ICDXA-EM5	3" Housing, Emergency Battery Back-Up
	EL490ICDXA	4" Housing
	EL490ICDXA-EM5	4" Housing, Emergency Battery Back-Up
	EL760ICDXA	6" Shallow Housing
 <p>Standard 0-10V IC Airtight Remodel Housing</p>	EL770ICDXA	6" Housing
	EL390RICDXA	3" Housing
	EL490RICDXA	4" Housing
 <p>R-60 Foam Insulation Dedicated LED 0-10V IC Airtight New Construction Housing with</p>	EL760RICDXA	6" Shallow Housing
	EL770RICDXA	6" Housing
	EL490AJICDXA	4" Housing
 <p>2-Hour Fire Rated 0-10V ICA Housing (Sound Rated)</p> 	EL39FICDXA	3" Housing
	EL49FICDXA	4" Housing
	EL75FICDXAS	6" Shallow Housing
	EL76FICDXA	6" Housing
 <p>4" New Construction 0-10V IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>  <p>NEW!</p>	EJB4ICDXA	<p>New Construction Housing with quick connector for 2-Hour Fire Rated ceilings.</p> <p>Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716</p>
	<p>A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714</p>	
 <p>4" Remodel 0-10V IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>  <p>NEW!</p>	EJB4RICDXA	<p>Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs.</p> <p>Compatible Trims: ELK4116, ELK4127, ELK4129, ELK4188, ELK4710, ELK4713, ELK4715, ELK4216, ELK4229, ELK4227, ELK4714, ELK4716</p>
	ELJ4OV	For use with EJB4RICDXA to cover tabs

The Koto™ System

2" Aperture Module with Twist-On Trims



Architectural Koto™ LED Module & Housings

Description	CAT. #	Specs
 <p>Architectural Construction Koto™ LED Light Engine Standard 38° Lens, with 25° & 60° lenses included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Frosted Diffuser (L49) Optional Reflectors: 15° (EP735C), 25° (EP736C), 38° (EP737C), 60° (EP738C)</p> <p>NEW!</p>	ELK1927D	970 lm MAX., 2700K
	ELK1930D	1000 lm MAX., 3000K
	ELK1935D	1030 lm MAX., 3500K
	ELK1940D	1050 lm MAX., 4000K
	ELK19SD	940 lm MAX., Sunset
	ELK2127D	1360 lm MAX., 2700K
	ELK2130D	1430 lm MAX., 3000K
	ELK2135D	1510 lm MAX., 3500K
	ELK2140D	1690 lm MAX., 4000K
	ELK2427D	1720 lm MAX., 2700K
	ELK2430D	1800 lm MAX., 3000K
	ELK2435D	1875 lm MAX., 3500K
ELK2440D	1950 lm MAX., 4000K	
 <p>Architectural Construction Koto™ FOCUS LED Module 18° - 50° Adjustable Focus with a simple twist of the lens Includes white snoot installed on module and field changeable black snoot.</p>	ELK2127D-FC	1360 lm MAX., 2700K
	ELK2130D-FC	1430 lm MAX., 3000K
	ELK2135D-FC	1510 lm MAX., 3500K
	ELK2140D-FC	1690 lm MAX., 4000K
 <p>Shallow Max. Adjustability ICA Housing 1000 lm with ELK19 Series Module 1200 lm with ELK21 Series Module 1500 lm with ELK24 Series Module (3 1/2" Height)</p>	E2LK34ICA	2" Housing, 14.7W, 120V, Triac/ELV
	E2LK35ICAD	2" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
 <p>Shallow Max. Adjustability ICA Housing 850 lm with ELK19 Series Module 1100 lm with ELK21 Series Module 1500 lm with ELK24 Series Module (3 1/2" Height - Easy-to-Remove Driver)</p>	E3LK76ICA	3" Housing, 14.7W, 120V, Triac/ELV
	E3LK77ICAD	3" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
	E4LK98ICA	4" Housing, 14.7W, 120V, Triac/ELV
	E4LK99ICAD	4" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
 <p>High Lumen Max. Adjustability ICA Housing For use with ELK21 & ELK24 Series Module (5 1/2" Height)</p>	E2LK41ICA	2" Housing, 15.7W, 120V, Triac/ELV
	E2LK42ICAD	2" Housing, 15.7W, 120/277V, 0-10V/Triac/ELV
	E2LK94ICA	2" Housing, 18.9W, 120V, Triac/ELV
 <p>High Lumen Max. Adjustability ICA Housing For use with ELK21 & ELK24 Series Module (5 1/2" Height - Easy-to-Remove Driver)</p>	E2LK95ICAD	2" Housing, 18.9W, 120/277V, 0-10V/Triac/ELV
	E3LK53ICA	3" Housing, 15.7W, 1250 lm, 120V, Triac/ELV
	E3LK54ICAD	3" Housing, 15.7W, 1250 lm, 120/277V, 0-10V/Triac/ELV
	E3LK84ICA	3" Housing, 18.9W, 1500 lm, 120V, Triac/ELV
	E3LK85ICAD	3" Housing, 18.9W, 1500 lm, 120/277V, 0-10V/Triac/ELV
	E4LK47ICA	4" Housing, 15.7W, 1250 lm, 120V, Triac/ELV
	E4LK48ICAD	4" Housing, 15.7W, 1250 lm, 120/277V, 0-10V/Triac/ELV
 <p>High Lumen ICA Housing For use with ELK21 & ELK24 Series Module (7 1/4" Height - Easy-to-Remove Driver)</p>	E4LK78ICA	4" Housing, 18.9W, 1500 lm, 120V, Triac/ELV
	E4LK79ICAD	4" Housing, 18.9W, 1500 lm, 120/277V, 0-10V/Triac/ELV
	E6LK43ICA	6" Housing, 15.7W, 1250 lm, 120V, Triac/ELV
	E6LK44ICAD	6" Housing, 15.7W, 1250 lm, 120/277V, 0-10V/Triac/ELV
E6LK56ICA	6" Housing, 18.9W, 1500 lm, 120V, Triac/ELV	
E6LK57ICAD	6" Housing, 18.9W, 1500 lm, 120/277V, 0-10V/Triac/ELV	

The Koto™ System

2" Aperture Module with Twist-On Trims



Architectural Koto™ LED Module & Housings

Description	CAT. #	Specs
 <p>Standard ICA New Construction Housing 750 lm with ELK19 Series Module 950 lm with ELK21 Series Module 1100 lm with ELK24 Series Module (5 1/2" Height)</p>	E3LK65ICA	3" Housing, 12.5W, 120V, Triac/ELV
	E3LK65ICA-EM1	3" Housing, Emergency Battery Back-Up
	E3LK66ICAD	3" Housing, 12.5W, 120/277V, 0-10V/Triac/ELV
	E3LK66ICAD-EM1	3" Housing, Emergency Battery Back-Up
	E4LK87ICA	4" Housing, 11.8W, 120V, Triac/ELV
	E4LK87ICA-EM1	4" Housing, Emergency Battery Back-Up
	E4LK88ICAD	4" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV
	E4LK88ICAD-EM1	4" Housing, Emergency Battery Back-Up
	 <p>Standard ICA New Construction Housing 1100 lm with ELK21 & ELK24 Series Module (7 1/2" Height)</p>	E6LK37ICA
E6LK37ICA-EM1		6" Housing, Emergency Battery Back-Up
E6LK38ICAD		6" Housing, 14.7W, 120/277V, 0-10V/Triac/ELV
E6LK38ICAD-EM1		6" Housing, Emergency Battery Back-Up
 <p>Standard Remodel ICA Housing 750 lm with ELK19 Series Module 950 lm with ELK21 Series Module 1100 lm with ELK24 Series Module (4 5/8" Height for 2" Housing) (5 1/2" Height for 3" & 4" Housings)</p>	E2LK57RICA	2" Housing, 10.5W, 120V, Triac/ELV
	E3LK65RICA	3" Housing, 10.5W, 120V, Triac/ELV
	E3LK66RICAD	3" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV
	E4LK87RICA	4" Housing, 11.8W, 120V, Triac/ELV
	E4LK88RICAD	4" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV
 <p>2-Hour Fire Rated ICA Housing 750 lm with ELK19 Series Module 950 lm with ELK21 Series Module 1100 lm with ELK24 Series Module (7 1/2" Height - Sound Rated)</p>	ELK72FICA	3" Housing, 10.5W, 120V, Triac/ELV
	ELK73FICAD	3" Housing, 10.5W, 120/277V, 0-10V/Triac/ELV
	ELK93FICA	4" Housing, 11.8W, 120V, Triac/ELV
	ELK94FICAD	4" Housing, 11.8W, 120/277V, 0-10V/Triac/ELV
 <p>4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>	E4JB85ICA	4" Housing, 120V, Triac/ELV
	E4JB86ICAD	4" Housing, 120/277V, 0-10V/Triac/ELV
 <p>4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings</p> <p>Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ40V) to cover tabs</p>	E4JB85RICA	4" Housing, 120V, Triac/ELV
	E4JB85RICAD	4" Housing, 120/277V, 0-10V/Triac/ELV
 <p>ELJ40V</p>	For use with E4JB85RICA & E4JB85RICAD to cover tabs	

A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714















The Koto™ System



2" Aperture Module with Twist-On Trims



NEW! 24V DC Koto™ LED Module & Housings

Description	CAT. #	Specs
 <p>24V DC Koto™ LED Module Works with 4" Koto™ 24V DC Housings & Koto Twist-On Trims Standard 25°, 38° & 60° Lens Included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spead Lens (L47), Clear Lens (L48), Frosted Lens (L49), Snoot (L50), Color Shifter (L51) Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)</p>		ELK0827-24 10W, 800 lm, 2700K, 24V DC
		ELK0830-24 10W, 800 lm, 3000K, 24V DC
 <p>24V DC MAX. Adjustability IC Airtight New Construction Housing</p>		E24V276ICA 2" Housing, 24V DC input
		E24V386ICA 3" Housing, 24V DC input
		E24V485ICA 4" Housing, 24V DC input
 <p>24V DC Standard IC Airtight New Construction Housing</p>		E24V390ICA 3" Housing, 24V DC input
		E24V490ICA 4" Housing, 24V DC input
		E24V770ICA 6" Housing, 24V DC input
 <p>24V DC Shallow IC Airtight New Construction Housing</p>	E24V760ICA	6" Shallow Housing, 24V DC input
 <p>24V DC Standard IC Airtight Remodel Housing</p>		E24V390RICA 3" Housing, 24V DC input
		E24V490RICA 4" Housing, 24V DC input
		E24V770RICA 6" Housing, 24V DC input
 <p>24V DC Shallow IC Airtight Remodel Housing</p>	E24V760RICA	6" Shallow Housing, 24V DC input
 <p>R-60 Foam Insulation 24V DC Dedicated LED IC Airtight New Construction Housing</p>	E24V490AJICA	4" Housing, 24V DC input
 <p>2-Hour Fire Rated 24V DC New Construction ICA Housing (Sound Rated)</p>		E24V39FICA 3" Housing, 24V DC input
		E24V48FICA 4" Housing, 24V DC input
		E24V76FICA 6" Housing, 24V DC input
 <p>Shallow 2-Hour Fire Rated 24V DC New Construction ICA Housing (Sound Rated)</p>		E24V75FICAS 6" Shallow Housing, 24V DC input

12V AC Koto™ Retrofit LED Module











Description	CAT. #	Specs
 <p>12V AC Retrofit Koto™ LED Module Works with 3" & 4" MR16 Bi-Pin Low Voltage Housings & Koto Trims Standard 25°, 38° & 60° Lens Included Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spead Lens (L47), Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)</p>		ELK0827-12 9W, 800 lm, 2700K, 12V AC
		ELK0830-12 9W, 800 lm, 3000K, 12V AC
		ELK08SD-12 9W, 800 lm, Sunset, 12V AC

The Koto™ System



2" Aperture Module with Twist-On Trims



2" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 2" Round Deep Reflector	ELK2818W	All White
	ELK2818BB	All Black
	ELK2818BZ	All Bronze
	ELK2818B	Black/White Ring
	ELK2818H	Haze/White Ring
 2" Round Adjustable Pinhole	ELK2827W	All White
	ELK2827BB	All Black
	ELK2827BZ	All Bronze
	ELK2827B	Black/White Ring
 2" Round Adjustable Reflector	ELK2829W	All White
	ELK2829BB	All Black
	ELK2829BZ	All Bronze
	ELK2829B	Black/White Ring
	ELK2829H	Haze/White Ring
 2" Round Curved Reflector NEW!	ELK2872W	All White
	ELK2872B	All Black
 2" Round Gimbal	ELK2888W	All White
	ELK2888B	All Black
	ELK2888BZ	All Bronze
 2" Square Deep Reflector	ELK2518W	All White
	ELK2518BB	All Black
	ELK2518B	Black/White Ring
 2" Square Adjustable Reflector	ELK2529W	All White
	ELK2529BB	All Black
	ELK2529B	Black/White Ring
 2" Square Reflector	ELK2541W	All White
	ELK2541BB	All Black
	ELK2541B	Black/White Ring
 2" Square Adjustable Pinhole	ELK2527W	All White
	ELK2527BB	All Black
	ELK2527B	Black/White Ring
 2" Square Gimbal	ELK2588W	All White
	ELK2588B	All Black
	ELK2588BZ	All Bronze

2" Pex™ Trimless for Koto™ Module

Description	CAT. #	Specs
 2" Round Adjustable Trimless Reflector	ELK215W	White
	ELK215B	Black
 2" Round Trimless Spackle Frame	EL2SFR	For use with ELK215

The Koto™ System

2" Aperture Module with Twist-On Trims



3" Pex™ Diecast Trims for Koto™ Module





Description		CAT. #	Specs
	3" Round Deep Reflector	ELK3618W	All White
		ELK3618BB	All Black
		ELK3618BZ	All Bronze
		ELK3618B	Black/White Ring
		ELK3618C	Chrome/White Ring
		ELK3618H	Haze/White Ring
	3" Round Adjustable Reflector	ELK3629W	All White
		ELK3629BB	All Black
		ELK3629BZ	All Bronze
		ELK3629B	Black/White Ring
		ELK3629C	Chrome/White Ring
		ELK3629H	Haze/White Ring
	3" Round Adjustable Pinhole	ELK3627W	All White
		ELK3627B	Black/White Ring
		ELK3627H	Haze/White Ring
		ELK3627BB	All Black
		ELK3627BZ	All Bronze
	3" Round Adjustable Slot Aperture	ELK3620W	Black Slot/White Ring
	3" Round Adjustable Reflector Wall Wash	ELK3622W	All White
	3" Round Regressed Eyeball	NEW! ELK3653W	All White
		ELK3653B	Black/White Ring
		ELK3653BB	All Black
	3" Round Curved Reflector	NEW! ELK3672W	All White
		ELK3672B	All Black
	3" Round Directional Gimbal	NEW! ELK3679W	All White
		ELK3679B	Black/White Ring
		ELK3679H	Haze/White Ring
		ELK3679BB	All Black
	3" Round Adjustable Baffle	ELK3693W	All White
	3" Square Deep Reflector	ELK3318W	All White
		ELK3318B	Black/White Ring
		ELK3318BB	All Black
		ELK3318BZ	All Bronze
		ELK3318C	Chrome/White Ring
		ELK3318H	Haze/White Ring
	3" Square Adjustable Reflector	ELK3329W	All White
		ELK3329BB	All Black
		ELK3329BZ	All Bronze
		ELK3329B	Black/White Ring
		ELK3329C	Chrome/White Ring
		ELK3329H	Haze/White Ring
	3" Square Adjustable Reflector Wall Wash	ELK3322W	All White

The Koto™ System



2" Aperture Module with Twist-On Trims










3" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 3" Square Adjustable Pinhole	ELK3327W	All White
	ELK3327B	Black/White Ring
	ELK3327H	Haze/White Ring
	ELK3327BB	All Black
	ELK3327BZ	All Bronze
 3" Square Reflector	ELK3341W	All White
	ELK3341B	Black/White Ring
	ELK3341BB	All Black
	ELK3341BZ	All Bronze
 3" Square Regressed Eyeball NEW!	ELK3353W	All White
	ELK3353B	Black/White Ring
	ELK3353BB	All Black
 3" Square Adjustable Baffle	ELK3393W	All White

3" Pex™ Flush Mount Trim Adaptors for Koto™ Trims

Description	CAT. #	Specs
 3" Round Flush Mount Trim Adaptor	EL3FMR	For 3" Pex Round Trims
 3" Square Flush Mount Trim Adaptor	EL3FMS	For 3" Pex Square Trims

3" Pex™ Trimless for Koto™ Module










Description	CAT. #	Specs
 3" Round Trimless Reflector NEW!	ELK308W	White
	ELK308B	Black
	ELK308H	Haze
 3" Round Adjustable Trimless Reflector	ELK315W	White
	ELK315B	Black
	ELK315H	Haze
 3" Round Trimless Spackle Frame	EL3SFR	For use with ELK315
 3" Round Knife Edge Wood Ceiling Trim with Mounting Clips	EL3WCRW	White, for use with ELK315
	EL3WCRB	Black, for use with ELK315
 3" Square Trimless Reflector NEW!	ELK370W	White
	ELK370B	Black
	ELK370H	Haze
 3" Square Adjustable Trimless Reflector NEW!	ELK381W	White
	ELK381B	Black
	ELK381H	Haze
 3" Square Trimless Spackle Frame NEW!	EL03SFS	For use with ELK370 & ELK381

The Koto™ System

2" Aperture Module with Twist-On Trims



4" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 <p>4" Round Shallow Reflector</p>	ELK4116W	All White
	ELK4116H	Haze/White Ring
 <p>4" Round Deep Reflector</p>	ELK4118W	All White
	ELK4118BB	All Black
	ELK4118BZ	All Bronze
	ELK4118B	Black/White Ring
	ELK4118C	Chrome/White Ring
	ELK4118H	Haze/White Ring
 <p>4" Round Adjustable Reflector</p>	ELK4129W	All White
	ELK4129BB	All Black
	ELK4129BZ	All Bronze
	ELK4129B	Black/White Ring
	ELK4129C	Chrome/White Ring
	ELK4129H	Haze/White Ring
 <p>4" Round Adjustable Reflector with Clear Glass Lens</p>	ELK4111W	All White
	ELK4111BB	All Black
	ELK4111BZ	All Bronze
	ELK4111B	Black/White Ring
	ELK4111C	Chrome/White Ring
	ELK4111H	Haze/White Ring
 <p>4" Round Adjustable Reflector with Frosted Lens</p>	ELK4112W	All White
	ELK4112BB	All Black
	ELK4112BZ	All Bronze
	ELK4112B	Black/White Ring
	ELK4112C	Chrome/White Ring
	ELK4112H	Haze/White Ring
 <p>4" Round Rotatable Slot Aperture</p>	ELK4120W	Black Slot/White Ring
 <p>4" Round Adjustable Wall Wash</p>	ELK4122W	All White
 <p>4" Round Adjustable Pinhole</p>	ELK4127W	All White
	ELK4127BB	All Black
	ELK4127BZ	All Bronze
	ELK4127B	Black/White Ring
	ELK4127H	Haze/White Ring
 <p>4" Round Adjustable Pinhole with Frosted Lens</p>	ELK4125W	All White
	ELK4125BB	All Black
	ELK4125BZ	All Bronze
	ELK4125B	Black/White Ring
	ELK4125H	Haze/White Ring







NEW!

The Koto™ System

2" Aperture Module with Twist-On Trims



4" Pex™ Diecast Trims for Koto™ Module









Description	CAT. #	Specs
 4" Round Slot Aperture	ELK4130W	Black Slot/White Ring
 4" Round Adjustable Spot	ELK4188W	All White
	ELK4188B	All Black
	ELK4188BZ	All Bronze
 4" Round Regressed Eyeball NEW!	ELK4153W	All White
	ELK4153BB	All Black
	ELK4153B	Black/White Ring
 4" Round Curved Reflector NEW!	ELK4172W	All White
	ELK4172B	All Black
 4" Round Directional Gimbal NEW!	ELK4179W	All White
	ELK4179BB	All Black
	ELK4179B	Black/White Ring
	ELK4179H	Haze/White Ring
 4" Round Adjustable Baffle	ELK4193W	All White
	ELK4193BB	All Black
	ELK4193B	Black/White Ring
 4" Square Shallow Reflector	ELK4216W	All White
	ELK4216H	Haze/White Ring
 4" Square Deep Reflector	ELK4218W	All White
	ELK4218B	Black/White Ring
	ELK4218BB	All Black
	ELK4218BZ	All Bronze
	ELK4218C	Chrome/White Ring
	ELK4218H	Haze/White Ring
 4" Square Adjustable Reflector	ELK4229W	All White
	ELK4229BB	All Black
	ELK4229BZ	All Bronze
	ELK4229B	Black/White Ring
	ELK4229C	Chrome/White Ring
	ELK4229H	Haze/White Ring

The Koto™ System



2" Aperture Module with Twist-On Trims



4" Pex™ Diecast Trims for Koto™ Module

Description	CAT. #	Specs
 4" Square Adjustable Reflector	ELK4212W	All White
	ELK4212BB	All Black
	ELK4212BZ	All Bronze
	ELK4212B	Black/White Ring
	ELK4212C	Chrome/White Ring
	ELK4212H	Haze/White Ring
 4" Square Adjustable Slot Rotatable Aperture	ELK4220W	Black Slot/White Ring
 4" Square Adjustable Wall Wash	ELK4222W	White Ring
 4" Square Adjustable Pinhole	ELK4227W	All White
	ELK4227BB	All Black
	ELK4227BZ	All Bronze
	ELK4227B	Black/White Ring
	ELK4227H	Haze/White Ring
	ELK4227N	Black/Nickel Ring
 4" Square Regressed Eyeball	ELK4253W	All White
	ELK4253BB	All Black
	ELK4253B	Black/White Ring
 4" Square Adjustable Reflector	ELK4282W	All White
	ELK4282BZ	All Bronze
 4" Square Adjustable Baffle	ELK4284W	All White
	ELK4284B	All Black
	ELK4284BZ	All Bronze
 4" Square Adjustable Phenolic Baffle	ELK4293W	All White
	ELK4293BB	All Black
	ELK4293B	Black/White Ring

4" Pex™ Flush Mount Trim Adaptors for Koto™ Trims









Description	CAT. #	Specs
 4" Round Flush Mount Trim Adaptor	EL4FMR	For ELK4116, ELK4118, ELK4127, ELK4129, ELK4710, ELK4713, ELK4715
 4" Square Flush Mount Trim Adaptor	EL4FMS	For ELK4216, ELK4218, ELK4227, ELK4229

The Koto™ System






2" Aperture Module with Twist-On Trims



4" Pex™ Trimless for Koto™ Module

Description	CAT. #	Specs
 <p>4" Round Non-Adjustable Trimless Reflector</p>	ELK408W	White
	ELK408B	Black
	ELK408H	Haze
	ELK408BZ	Bronze
 <p>4" Round Adjustable Trimless Reflector</p>	ELK415W	White
	ELK415B	Black
	ELK415H	Haze
	ELK415BZ	Bronze
 <p>4" Round Trimless Spackle Frame</p>	EL4SFR	For use with ELK408 and ELK415
 <p>4" Trimless Adjustable Reflector Trim</p>	ELK430W	White
	ELK430B	Black
	ELK430BZ	Bronze
 <p>4" Trimless Adjustable Baffle Trim</p>	ELK434W	White
	ELK434B	Black
	ELK434BZ	Bronze
 <p>4" Square Trimless Reflector</p>	ELK445W	White
	ELK445B	Black
	ELK445H	Haze
 <p>4" Square Adjustable Trimless Reflector</p>	ELK459W	White
	ELK459B	Black
	ELK459H	Haze
 <p>4" Square Trimless Spackle Frame</p>	EL4SFS	For use with ELK445 and ELK459

4" Unique™ Trims for Koto™ Module






Description	CAT. #	Specs
 <p>4" Round Adjustable Reflector</p>	ELK4710W	All White
	ELK4710B	All Black
	ELK4710BZ	All Bronze
	ELK4717W	All White, Deep Reflector
	ELK4717BZ	All Bronze, Deep Reflector
 <p>4" Round Adjustable Baffle</p>	ELK4713W	All White
	ELK4713BZ	All Bronze
	ELK4719W	All White, Deep Baffle
 <p>4" Round Wall Wash</p>	ELK4715W	All White
	ELK4715BZ	All Bronze
 <p>4" Square Reflector</p>	ELK4714W	All White
	ELK4714B	All Black
	ELK4714BZ	All Bronze
 <p>4" Square Baffle</p>	ELK4716W	All White

The Koto™ System




2" Aperture Module with Twist-On Trims



4" Flexa™ Trims for Koto™ Module

Description	CAT. #	Specs
 <p>4" Round Adjustable Reflector</p>	ELK4721WW	All White
	ELK4721BB	All Black
	ELK4721BZBZ	All Bronze
	ELK4721BW	Black Ref./White Ring
	ELK4721CW	Chrome Ref./White Ring
	ELK4721HW	Haze Ref./White Ring
 <p>4" Square Reflector</p>	ELK4741WW	All White
	ELK4741BB	All Black
	ELK4741BZBZ	All Bronze
	ELK4741BW	Black Ref./White Ring
 <p>4" Round Baffle</p>	ELK4723WW	All White
	ELK4723BB	All Black
	ELK4723BZBZ	All Bronze
 <p>4" Square Baffle</p>	ELK4743WW	All White
	ELK4743BB	All Black
	ELK4743BZBZ	All Bronze
	ELK4743BW	Black Baffle/White Ring
 <p>4" Adjustable Square Reflector</p>	ELK4759WW	All White
	ELK4759BB	All Black
	ELK4759B	Black Ref./White Ring
	ELK4759H	Haze Ref./White Ring

4" Pex™ Universal Sloped Ceiling Trims for Koto™ Module

Description	CAT. #	Specs
 <p>4" Round Universal Sloped Ceiling Reflector</p>	ELK4357W	All White
	ELK4357BB	All Black
	ELK4357BZ	All Bronze
	ELK4357B	Black/White Ring
	ELK4357H	Haze/White Ring
 <p>4" Round Universal Sloped Ceiling Reflector with Clear Glass</p>	ELK4347W	All White
	ELK4347BB	All Black
	ELK4347BZ	All Bronze
	ELK4347B	Black/White Ring
	ELK4347H	Haze/White Ring
 <p>4" Round Universal Sloped Ceiling Reflector with Frosted Glass</p>	ELK4349W	All White
	ELK4349BB	All Black
	ELK4349BZ	All Bronze
	ELK4349B	Black/White Ring
	ELK4349H	Haze/White Ring




4" Pex™ Universal Sloped Ceiling Trims for use in EL470ICA and EL470RICA housings only with Standard Koto™ LED Module

The Koto™ System




2" Aperture Module with Twist-On Trims






5" & 6" Pex™ Trims for Koto™ Module

Description	CAT. #	Specs
 5" Round Reflector	ELK5421W	All White
 5" Round Baffle	ELK5493W	All White
 6" Round Reflector	ELK6418W	All White
	ELK6418BB	All Black
	ELK6418BZ	All Bronze
	ELK6418H	Haze Ref./White Ring
 6" Round Adjustable Reflector NEW!	ELK6429W	All White
	ELK6429BB	All Black
	ELK6429BZ	All Bronze
	ELK6429H	Haze Ref./White Ring
 6" Round Adjustable Slot Aperture	ELK6420W	All White
 6" Round Adjustable Pinhole with Reflector	ELK6427W	All White
	ELK6427B	Black Ref./White Ring
	ELK6427H	Haze Ref./White Ring
 6" Square Adjustable Reflector NEW!	ELK6829W	All White
	ELK6829BB	All Black
	ELK6829H	Haze Ref./White Ring

6" Flexa™ Trims for Koto™ Module

Description	CAT. #	Specs
 6" Round Reflector	ELK610WW	All White
	ELK610BB	All Black
	ELK610BZBZ	All Bronze
	ELK610CC	All Chrome
	ELK610BW	Black Ref./White Ring
	ELK610CW	Chrome Ref./White Ring
	ELK610HW	Haze Ref./White Ring
 6" Round Adjustable Reflector	ELK629WW	All White
	ELK629BB	All Black
	ELK629BW	Black Ref./White Ring
	ELK629BZBZ	All Bronze
	ELK629CW	Chrome Ref./White Ring
 6" Round Adjustable Baffle	ELK629HW	Haze Ref./White Ring
	ELK693WW	All White
	ELK693BB	All Black
	ELK693BZBZ	All Bronze
	ELK693BW	Black Ref./White Ring

6" Unique™ Trims for Koto™ Module






Description	CAT. #	Specs
 6" Round Reflector	ELK6710W	All White
	ELK6710B	All Black
	ELK6710BZ	All Bronze
 6" Round Baffle	ELK6713W	All White
	ELK6713BZ	All Bronze
 6" Round Wall Wash	ELK6715W	All White
	ELK6715BZ	All Bronze

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! Canless Koto™ LED Module, Frames & Power Packs








Description	CAT. #	Specs
 <p>Canless Koto™ LED Module Designed to be installed without a recessed housing!</p> <p>Standard 38° Lens, with 28° & 60° lenses included</p> <p>Optional Lenses: 18° (EP731C) Optional: Louver (L45), Linear Lens (L46), Spread Lens (L47), Frosted Diffuser (L49), Single Asymmetric Lens (L54), Double Asymmetric Lens (L55)</p> <p>Optional Reflectors: 15° (EP735C), 25° (EP736C), 38° (EP737C), 60° (EP738C)</p>	EKCL2127D	Up to 950 lm, 2700K
	EKCL2130D	1Up to 950 lm, 3000K
	EKCL2135D	Up to 950 lm, 3500K
	EKCL2140D	Up to 950 lm, 4000K
	EKCL21SDD	Up to 950 lm, Sunset
 <p>Canless Koto™ New Construction Frames Driver specified for 120V (Triac/ELV) or 120/277V (0-10V/Triac/ELV) (Easy-to-Remove Driver on frame)</p>	E2KCL10IC	2" Frame, 10.5W, 120V, Triac/ELV
	E2KCL10IC-EM1	2" Frame, Emergency Battery Backup
	E2KCL10ICDX	2" Frame, 10.5W, 120/277V, 0-10V/Triac/ELV
	E2KCL10ICDX-EM1	2" Frame, Emergency Battery Backup
	E3KCL10IC	3" Frame, 10.5W, 120V, Triac/ELV
	E3KCL10IC-EM1	3" Frame, Emergency Battery Backup
	E3KCL10ICDX	3" Frame, 10.5W, 120/277V, 0-10V/Triac/ELV
	E3KCL10ICDX-EM1	3" Frame, Emergency Battery Backup
	E4KCL10IC	4" Frame, 10.5W, 120V, Triac/ELV
	E4KCL10IC-EM1	4" Frame, Emergency Battery Backup
 <p>Remodel IC Power Packs Driver specified for 120V (Triac/ELV) or 120/277V (0-10V/Triac/ELV)</p>	E4KCL10ICDX	4" Frame, 10.5W, 120/277V, 0-10V/Triac/ELV
	E4KCL10ICDX-EM1	4" Frame, Emergency Battery Backup
	E6KCL10IC	6" Frame, 10.5W, 120V, Triac/ELV
	E6KCL10IC-EM1	6" Frame, Emergency Battery Backup
 <p>New Construction Plaster Frames for Remodel Power Pack (Optional)</p>	E6KCL10ICDX	6" Frame, 10.5W, 120/277V, 0-10V/Triac/ELV
	E6KCL10ICDX-EM1	6" Frame, Emergency Battery Backup
	EKCL10RIC	10.5W, 950 lm, 120V, Triac/ELV
	EKCL10RIC-EM1	10.5W, 950 lm, Emergency Battery Backup
	EKCL10RICDX	10.5W, 950 lm, 120/277V, 0-10V/Triac/ELV
	EKCL10RICDX-EM1	10.5W, 950 lm, Emergency Battery Backup
 <p>Emergency Battery Backup (Optional)</p>	E2LKF1	2" Frame
	E3LKF1	3" Frame
	E4LF1	4" Frame
	E6LF1	6" Frame
	KEM-ERT	120/277V optional 90 min. battery backup

The Koto™ System



2" Aperture Module with Twist-On Trims



NEW! 2" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 <p>2" Round Deep Reflector</p>	EKCL2818W	All White
	EKCL2818BB	All Black
	EKCL2818BZ	All Bronze
	EKCL2818B	Black/White Ring
	EKCL2818H	Haze/White Ring
 <p>2" Round Adjustable Pinhole</p>	EKCL2827W	All White
	EKCL2827BB	All Black
	EKCL2827BZ	All Bronze
	EKCL2827B	Black/White Ring
 <p>2" Round Adjustable Reflector</p>	EKCL2829W	All White
	EKCL2829BB	All Black
	EKCL2829BZ	All Bronze
	EKCL2829B	Black/White Ring
	EKCL2829H	Haze/White Ring
 <p>2" Round Curved Reflector</p>	EKCL2872W	All White
	EKCL2872B	All Black
 <p>2" Round Gimbal</p>	EKCL2888W	All White
	EKCL2888B	All Black
	EKCL2888BZ	All Bronze
 <p>2" Square Deep Reflector</p>	EKCL2518W	All White
	EKCL2518BB	All Black
	EKCL2518B	Black/White Ring
 <p>2" Square Adjustable Reflector</p>	EKCL2529W	All White
	EKCL2529BB	All Black
	EKCL2529B	Black/White Ring
 <p>2" Square Reflector</p>	EKCL2541W	All White
	EKCL2541BB	All Black
	EKCL2541B	Black/White Ring
 <p>2" Square Adjustable Pinhole</p>	EKCL2527W	All White
	EKCL2527BB	All Black
	EKCL2527B	Black/White Ring
 <p>2" Square Gimbal</p>	EKCL2588W	All White
	EKCL2588B	All Black
	EKCL2588BZ	All Bronze

2" Pex™ Trimless for Canless Koto™ Module










Description	CAT. #	Specs
 <p>2" Round Adjustable Trimless Reflector</p>	ELK215W	White
	ELK215B	Black
 <p>2" Round Trimless Spackle Frame</p>	EL2SFR	For use with ELK215

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 3" Pex™ Diecast Trims for Canless Koto™ Module








Description	CAT. #	Specs
 3" Round Deep Reflector	EKCL3618W	All White
	EKCL3618BB	All Black
	EKCL3618BZ	All Bronze
	EKCL3618B	Black/White Ring
	EKCL3618C	Chrome/White Ring
	EKCL3618H	Haze/White Ring
 3" Round Adjustable Reflector	EKCL3629W	All White
	EKCL3629BB	All Black
	EKCL3629BZ	All Bronze
	EKCL3629B	Black/White Ring
	EKCL3629C	Chrome/White Ring
	EKCL3629H	Haze/White Ring
 3" Round Adjustable Pinhole	EKCL3627W	All White
	EKCL3627B	Black/White Ring
	EKCL3627H	Haze/White Ring
	EKCL3627BB	All Black
	EKCL3627BZ	All Bronze
 3" Round Adjustable Slot Aperture	EKCL3620W	Black Slot/White Ring
 3" Round Adjustable Reflector Wall Wash	EKCL3622W	All White
 3" Round Regressed Eyeball	EKCL3653W	All White
	EKCL3653B	Black/White Ring
	EKCL3653BB	All Black
 3" Round Curved Reflector	EKCL3672W	All White
	EKCL3672B	All Black
 3" Round Directional Gimbal	EKCL3679W	All White
	EKCL3679B	Black/White Ring
	EKCL3679H	Haze/White Ring
	EKCL3679BB	All Black
 3" Round Adjustable Baffle	EKCL3693W	All White

The Koto™ System



2" Aperture Module with Twist-On Trims



NEW! 3" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 <p>3" Square Deep Reflector</p>	EKCL3318W	All White
	EKCL3318B	Black/White Ring
	EKCL3318BB	All Black
	EKCL3318BZ	All Bronze
	EKCL3318C	Chrome/White Ring
	EKCL3318H	Haze/White Ring
 <p>3" Square Adjustable Reflector</p>	EKCL3329W	All White
	EKCL3329BB	All Black
	EKCL3329BZ	All Bronze
	EKCL3329B	Black/White Ring
	EKCL3329C	Chrome/White Ring
	EKCL3329H	Haze/White Ring
 <p>3" Square Adjustable Reflector Wall Wash</p>	EKCL3322W	All White
 <p>3" Square Adjustable Pinhole</p>	EKCL3327W	All White
	EKCL3327B	Black/White Ring
	EKCL3327H	Haze/White Ring
	EKCL3327N	Black/Nickel Ring
	EKCL3327BB	All Black
	EKCL3327BZ	All Bronze
 <p>3" Square Reflector</p>	EKCL3341W	All White
	EKCL3341B	Black/White Ring
	EKCL3341BB	All Black
	EKCL3341BZ	All Bronze
 <p>3" Square Regressed Eyeball</p>	EKCL3353W	All White
	EKCL3353B	Black/White Ring
	EKCL3353BB	All Black
 <p>3" Square Adjustable Baffle</p>	EKCL3393W	All White

3" Pex™ Flush Mount Trim Adaptors for Canless Koto™ Trims








Description	CAT. #	Specs
 <p>3" Round Flush Mount Trim Adaptor</p>	EL3FMR	For 3" Pex Round Trims
 <p>3" Square Flush Mount Trim Adaptor</p>	EL3FMS	For 3" Pex Square Trims

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 3" Pex™ Trimless for Canless Koto™ Module









Description	CAT. #	Specs
 <p>3" Round Trimless Reflector</p>	ELK308W	White
	ELK308B	Black
	ELK308H	Haze
 <p>3" Round Adjustable Trimless Reflector</p>	ELK315W	White
	ELK315B	Black
	ELK315H	Haze
 <p>3" Round Trimless Spackle Frame</p>	EL3SFR	For use with ELK315
 <p>3" Round Knife Edge Wood Ceiling Trim with Mounting Clips</p>	EL3WCRW	White, for use with ELK315
	EL3WCRB	Black, for use with ELK315
 <p>3" Square Trimless Reflector</p>	ELK370W	White
	ELK370B	Black
	ELK370H	Haze
 <p>3" Square Adjustable Trimless Reflector</p>	ELK381W	White
	ELK381B	Black
	ELK381H	Haze
 <p>3" Square Trimless Spackle Frame</p>	EL03SFS	For use with ELK370 & ELK381

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 4" Pex™ Diecast Trims for Canless Koto™ Module











Description	CAT. #	Specs
 4" Round Shallow Reflector	EKCL4116W	All White
	EKCL4116H	Haze/White Ring
 4" Round Deep Reflector	EKCL4118W	All White
	EKCL4118BB	All Black
	EKCL4118BZ	All Bronze
	EKCL4118B	Black/White Ring
	EKCL4118C	Chrome/White Ring
 4" Round Adjustable Reflector	EKCL4118H	Haze/White Ring
	EKCL4129W	All White
	EKCL4129BB	All Black
	EKCL4129BZ	All Bronze
	EKCL4129B	Black/White Ring
 4" Round Adjustable Reflector with Clear Glass Lens	EKCL4129C	Chrome/White Ring
	EKCL4129H	Haze/White Ring
	EKCL4111W	All White
	EKCL4111BB	All Black
	EKCL4111BZ	All Bronze
 4" Round Adjustable Reflector with Frosted Lens	EKCL4111B	Black/White Ring
	EKCL4111C	Chrome/White Ring
	EKCL4111H	Haze/White Ring
	EKCL4112W	All White
	EKCL4112BB	All Black
 4" Round Slot Aperture	EKCL4112BZ	All Bronze
	EKCL4112B	Black/White Ring
	EKCL4112C	Chrome/White Ring
	EKCL4112H	Haze/White Ring
	EKCL4130W	Black Slot/White Ring
 4" Round Adjustable Wall Wash	EKCL4122W	All White
 4" Round Adjustable Pinhole	EKCL4127W	All White
	EKCL4127BB	All Black
	EKCL4127BZ	All Bronze
	EKCL4127B	Black/White Ring
 4" Round Adjustable Pinhole with Frosted Lens	EKCL4127H	Haze/White Ring
	EKCL4125W	All White
	EKCL4125BB	All Black
	EKCL4125BZ	All Bronze
 4" Round Regressed Eyeball	EKCL4125B	Black/White Ring
	EKCL4125H	Haze/White Ring
	EKCL4153W	All White
	EKCL4153BB	All Black
	EKCL4153B	Black/White Ring

The Koto™ System

2" Aperture Module with Twist-On Trims



NEW! 4" Pex™ Diecast Trims for Canless Koto™ Module




Description	CAT. #	Specs
 4" Round Curved Reflector	EKCL4172W	All White
	EKCL4172B	All Black
 4" Round Directional Gimbal	EKCL4179W	All White
	EKCL4179BB	All Black
	EKCL4179B	Black/White Ring
	EKCL4179H	Haze/White Ring
 4" Round Adjustable Spot	EKCL4188W	All White
	EKCL4188B	All Black
	EKCL4188BZ	All Bronze
 4" Round Adjustable Baffle	EKCL4193W	All White
	EKCL4193BB	All Black
	EKCL4193B	Black/White Ring
 4" Square Shallow Reflector	EKCL4216W	All White
	EKCL4216H	Haze/White Ring
 4" Square Deep Reflector	EKCL4218W	All White
	EKCL4218B	Black/White Ring
	EKCL4218BB	All Black
	EKCL4218BZ	All Bronze
	EKCL4218C	Chrome/White Ring
	EKCL4218H	Haze/White Ring
 4" Square Adjustable Pinhole	EKCL4227W	All White
	EKCL4227BB	All Black
	EKCL4227BZ	All Bronze
	EKCL4227B	Black/White Ring
	EKCL4227H	Haze/White Ring
 4" Square Adjustable Pinhole with Frosted Lens	EKCL4227W	All White
	EKCL4227BB	All Black
	EKCL4227BZ	All Bronze
	EKCL4227B	Black/White Ring
	EKCL4227H	Haze/White Ring
 4" Square Adjustable Reflector	EKCL4229W	All White
	EKCL4229BB	All Black
	EKCL4229BZ	All Bronze
	EKCL4229B	Black/White Ring
	EKCL4229C	Chrome/White Ring
	EKCL4229H	Haze/White Ring
 4" Square Adjustable Wall Wash	EKCL4222W	White Ring

The Koto™ System



2" Aperture Module with Twist-On Trims









NEW! 4" Pex™ Diecast Trims for Canless Koto™ Module

Description	CAT. #	Specs
 <p>4" Square Regressed Eyeball</p>	EKCL4253W	All White
	EKCL4253BB	All Black
	EKCL4253B	Black/White Ring
 <p>4" Square Adjustable Reflector</p>	EKCL4282W	All White
	EKCL4282BZ	All Bronze
 <p>4" Square Adjustable Baffle</p>	EKCL4284W	All White
	EKCL4284B	All Black
	EKCL4284BZ	All Bronze

4" Pex™ Flush Mount Trim Adaptors for Canless Koto™ Trims

Description	CAT. #	Specs
 <p>4" Round Flush Mount Trim Adaptor</p>	EL4FMR	For EKCL4116, EKCL4118, EKCL4127, EKCL4129, EKCL4710, EKCL4713, EKCL4715
 <p>4" Square Flush Mount Trim Adaptor</p>	EL4FMS	For EKCL4216, EKCL4218, EKCL4227, EKCL4229

4" Pex™ Trimless for Canless Koto™ Module







Description	CAT. #	Specs
 <p>4" Round Non-Adjustable Trimless Reflector</p>	ELK408W	White
	ELK408B	Black
	ELK408H	Haze
	ELK408BZ	Bronze
 <p>4" Round Adjustable Trimless Reflector</p>	ELK415W	White
	ELK415B	Black
	ELK415H	Haze
 <p>4" Round Trimless Spackle Frame</p>	EL4SFR	For use with ELK408 and ELK415
 <p>4" Square Trimless Reflector</p>	ELK445W	White
	ELK445B	Black
	ELK445H	Haze
 <p>4" Square Adjustable Trimless Reflector</p>	ELK459W	White
	ELK459B	Black
	ELK459H	Haze
 <p>4" Square Trimless Spackle Frame</p>	EL4SFS	For use with ELK445 and ELK459

The Koto™ System






2" Aperture Module with Twist-On Trims



NEW! 4" Unique™ Trims for Canless Koto™ Module

Description	CAT. #	Specs
 4" Round Adjustable Reflector	EKCL4710W	All White
	EKCL4710B	All Black
	EKCL4710BZ	All Bronze
 4" Round Adjustable Deep Reflector	EKCL4717W	All White
	EKCL4717BZ	All Bronze
 4" Round Adjustable Baffle	EKCL4713W	All White
	EKCL4713BZ	All Bronze
 4" Round Wall Wash	EKCL4715W	All White
	EKCL4715BZ	All Bronze
 4" Square Reflector	EKCL4714W	All White
	EKCL4714B	All Black
	EKCL4714BZ	All Bronze
 4" Square Baffle	EKCL4716W	All White
	EKCL4716BZ	All Bronze

4" Flexa™ Trims for Canless Koto™ Module


Description	CAT. #	Specs
 4" Round Adjustable Reflector	EKCL4721WW	All White
	EKCL4721BB	All Black
	EKCL4721BZBZ	All Bronze
	EKCL4721BW	Black Ref./White Ring
	EKCL4721CW	Chrome Ref./White Ring
	EKCL4721HW	Haze Ref./White Ring
 4" Square Reflector	EKCL4721CN	Chrome Ref./Nickel Ring
	EKCL4741WW	All White
	EKCL4741BB	All Black
	EKCL4741BZBZ	All Bronze
 4" Round Baffle	EKCL4741BW	Black Ref./White Ring
	EKCL4741HW	Haze Ref./White Ring
	EKCL4723WW	All White
 4" Square Baffle	EKCL4723BB	All Black
	EKCL4723BZBZ	All Bronze
	EKCL4723BW	Black Baffle/White Ring
	EKCL4743WW	All White
 4" Adjustable Square Reflector	EKCL4743BB	All Black
	EKCL4743BZBZ	All Bronze
	EKCL4743BW	Black Baffle/White Ring
	EKCL4759WW	All White
	EKCL4759BB	All Black
	EKCL4759B	Black Ref./White Ring
	EKCL4759H	Haze Ref./White Ring

The Koto™ System





2" Aperture Module with Twist-On Trims



NEW! 4" Pex™ Universal Sloped Ceiling Trims for Canless Koto™ Module

Description	CAT. #	Specs
 <p>4" Round Universal Sloped Ceiling Reflector</p>	EKCL4357W	All White

6" Pex™ Trims for Canless Koto™ Module














Description	CAT. #	Specs
 <p>6" Round Reflector</p>	EKCL6418W	All White
	EKCL6418BB	All Black
	EKCL6418BZ	All Bronze
	EKCL6418H	Haze Ref./White Ring
 <p>6" Round Adjustable Reflector</p>	EKCL6429W	All White
	EKCL6429BB	All Black
	EKCL6429BZ	All Bronze
	EKCL6429H	Haze Ref./White Ring
 <p>6" Round Adjustable Slot Aperture</p>	EKCL6420W	All White
 <p>6" Round Adjustable Pinhole with Reflector</p>	EKCL6427W	All White
	EKCL6427B	Black Ref./White Ring
	EKCL6427H	Haze Ref./White Ring

The Koto™ System

2" Aperture Module with Twist-&-Lock Trims




Accessories Field Changeable







Description	CAT. #	Specs
 Field Changeable Lens	EP731C	18° Lens
	EP732C	28° Lens
	EP733C	38° Lens
	EP734C	60° Lens
 Field Changeable Reflectors	EP735C	15° Reflector
	EP736C	25° Reflector
	EP737C	38° Reflector
	EP738C	60° Reflector
 Field Changeable Secondary Optic Hex Louver	L45	Black, for a better glare shield
	L57	White, for a better glare shield
 Field Changeable Secondary Optic Linear	L46	For a wide rectangular illumination pattern
 Field Changeable Secondary Optic Spread	L47	For a symmetrical broadening of light beams
 Field Changeable Secondary Optic Frosted Diffuser	L49	For a frosted lens look
 Field Changeable Secondary Optic Color Shifter	L51	For a reduced color temperature
 Field Changeable Secondary Optic Color Lens	L52	Blue lens
	L53	Pink lens
 Asymmetric Lens	L54	Single asymmetric
	L55	Double asymmetric
 Snoot for Koto™ Modules	L50W	White
	L50B	Black
 Hard Wire Adapter	PSA38	Hard wire adapter to male Quick Connect terminal
 4" Hard Wire Adapter	PSA38-4	4" Hard Wire Adapter to male Quick
 Rewiring Kit	PSA38-22	22" Rewiring fit to male Quick Connect terminal.

NEW!

The Alder™ System

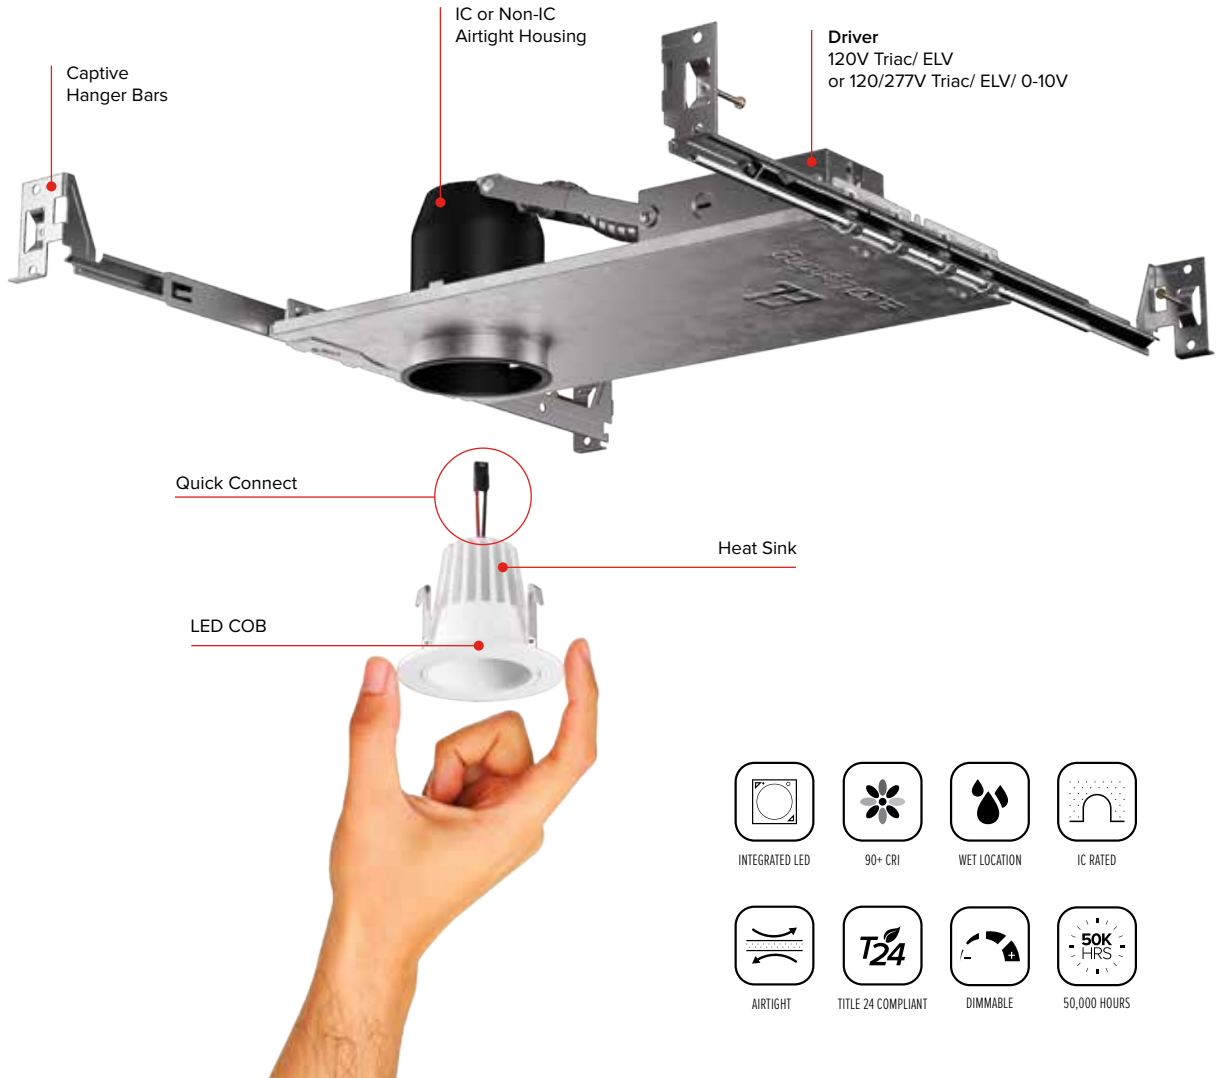2" Housings & LED Light Engines
































ALDER SYSTEM	STYLES		LUMENS	COLOR TEMPERATURE
HIGHTECH	 Round	 Square	 600 lm to 1200 lm	 2700K & 4000K
STANDARDLUMEN	 Round Adjustable	 Square Adjustable		

The Alder™ System

2" LED Lighting Solution



2" LED Housings & Light Engines
















Description	Cat. #	Specs
 2" IC Airtight New Construction LED Housing with Driver	E2LC106ICA	9W, 120V, Triac/ELV
 2" ICA New Construction LED Housing with Driver	E2LC175ICA	9W, 120V, Triac/ELV
 2" Non-IC New Construction LED Housing with Driver	E2LC106	9W, 120V, Triac/ELV
 2" ICA Remodel LED Housing with Driver	E2LC175RICA	9W, 120V, Triac/ELV
 2" Non-IC Remodel LED Housing with Driver	E2LRC106	9W, 120V, Triac/ELV
 2" LED Reflector	 E210C0627W	9W, 600 lm, 2700K
	E210C0630W	9W, 640 lm, 3000K
 2" HIGHLUMEN LED Reflector	 E210C0727W	9W, 800 lm, 2700K
	E210C0730W	9W, 840 lm, 3000K
	E210C0735W	9W, 860 lm, 3500K
	E210C0740W	9W, 875 lm, 4000K
 2" LED Baffle	 E214C0627W	9W, 600 lm, 2700K
	E214C0630W	9W, 640 lm, 3000K
 2" HIGHLUMEN LED Baffle	 E214C0727W	9W, 800 lm, 2700K
	E214C0730W	9W, 840 lm, 3000K
	E214C0735W	9W, 860 lm, 3500K
	E214C0740W	9W, 875 lm, 4000K
 2" LED Square Reflector	 E213C0627W	9W, 600 lm, 2700K
	E213C0630W	9W, 640 lm, 3000K
 2" HIGHLUMEN LED Square Reflector	 E213C0727W	9W, 800 lm, 2700K
	E213C0730W	9W, 840 lm, 3000K
	E213C0735W	9W, 860 lm, 3500K
	E213C0740W	9W, 875 lm, 4000K
 2" LED Square Baffle	 E215C0627W	9W, 600 lm, 2700K
	E215C0630W	9W, 640 lm, 3000K
 2" HIGHLUMEN LED Square Baffle	 E215C0727W	9W, 800 lm, 2700K
	E215C0730W	9W, 840 lm, 3000K
	E215C0735W	9W, 860 lm, 3500K
	E215C0740W	9W, 875 lm, 4000K
 2" LED Adjustable	 E218C0627W	9W, 600 lm, 2700K
	E218C0630W	9W, 640 lm, 3000K
 2" HIGHLUMEN LED Adjustable	 E218C0727W	9W, 800 lm, 2700K
	E218C0730W	9W, 840 lm, 3000K
	E218C0735W	9W, 860 lm, 3500K
	E218C0740W	9W, 875 lm, 4000K
 2" LED Square Adjustable	 E219C0627W	9W, 600 lm, 2700K
	E219C0630W	9W, 640 lm, 3000K
 2" HIGHLUMEN LED Square Adjustable	 E219C0727W	9W, 800 lm, 2700K
	E219C0730W	9W, 840 lm, 3000K
	E219C0735W	9W, 860 lm, 3500K
	E219C0740W	9W, 875 lm, 4000K

The Alder™ System

2" LED Lighting Solution





2" LED HighTech Housings & Light Engines
















Description	Cat. #	Specs
 2" HIGHTECH IC Airtight New Construction Housing	E2AJU12ICA	11W, 120/277V
 2" HIGHTECH New Construction Housing	E2LCU86ICA	11W, 120/277V, 0-10V/Triac/ELV
	E2LC185ICA	11W, 120V, Triac/ELV
 2" HIGHTECH Remodel Housing	E2LCU86RICA	11W, 120/277V, 0-10V/Triac/ELV
	E2LC185RICA	11W, 120V, Triac/ELV
 2" HIGHLUMEN Round LED Reflector 	E210C1827W	11W, 1000 lm, 2700K
	E210C1830W	11W, 1050 lm, 3000K
	E210C1835W	11W, 1100 lm, 3500K
	E210C1840W	11W, 1135 lm, 4000K
	E210C18SDW	11W, 800 lm, Sunset
 2" HIGHLUMEN Round LED Baffle 	E214C1827W	11W, 1000 lm, 2700K
	E214C1830W	11W, 1050 lm, 3000K
	E214C1835W	11W, 1100 lm, 3500K
	E214C1840W	11W, 1135 lm, 4000K
	E214C18SDW	11W, 800 lm, Sunset
 2" HIGHLUMEN Square LED Reflector 	E213C1827W	11W, 1000 lm, 2700K
	E213C1830W	11W, 1040 lm, 3000K
	E213C1835W	11W, 1100 lm, 3500K
	E213C1840W	11W, 1125 lm, 4000K
	E213C18SDW	11W, 800 lm, Sunset
 2" HIGHLUMEN Square LED Baffle 	E215C1827W	11W, 1000 lm, 2700K
	E215C1830W	11W, 1040 lm, 3000K
	E215C1835W	11W, 1100 lm, 3500K
	E215C1840W	11W, 1125 lm, 4000K
	E215C18SDW	11W, 800 lm, Sunset
 2" HIGHLUMEN LED Round Adjustable 	E218C1827W	11W, 1040 lm, 2700K
	E218C1830W	11W, 1100 lm, 3000K
	E218C1835W	11W, 1150 lm, 3500K
	E218C1840W	11W, 1200 lm, 4000K
	E218C18SDW	11W, 800 lm, Sunset
 2" HIGHLUMEN LED Square Adjustable 	E219C1827W	11W, 1030 lm, 2700K
	E219C1830W	11W, 1090 lm, 3000K
	E219C1835W	11W, 1140 lm, 3500K
	E219C1840W	11W, 1190 lm, 4000K
	E219C18SDW	11W, 800 lm, Sunset

The Mahogany™ System


Integrated LED Housings



4" LED Housings & Inserts


Description	CAT. #	Specs
 <p>4" New Construction IC Airtight Integrated LED Housing</p>	ELD47ICA	16W, 1200 lm, 2700K
	ELD46ICA	16W, 1200 lm, 3000K
 <p>4" Smooth Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4411W	White
 <p>4" Frosted Lens Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4412W	White
 <p>4" Regressed Reflector and Frosted Lens with Reflector Trim</p>	EL4424W	White
 <p>4" Reflector with Suspended Glass Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4426W	White
 <p>4" Pinhole with Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4490W	White
 <p>4" Wall Wash Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4492W	White
 <p>4" Baffle Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4493W	White
	EL4493B	Black/White Ring
 <p>4" Smooth Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4499W	All White
	EL4499B	Black/White Ring
	EL4499C	Chrome/White Ring
	EL4499H	Haze/White Ring
 <p>4" Smooth Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4511W	White
 <p>4" Frosted Lens Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4512W	White
 <p>4" Frosted Pinhole Lens Reflector Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4515W	White
 <p>4" Square on Square Baffle Trim</p>	EL4584W	White
 <p>4" Wall Wash Trim</p>	EL4592W	White
 <p>4" Baffle Trim Includes 3-Optic Lens (14°, 24°, 36°)</p>	EL4593W	White

Dedicated LED Housings & Inserts

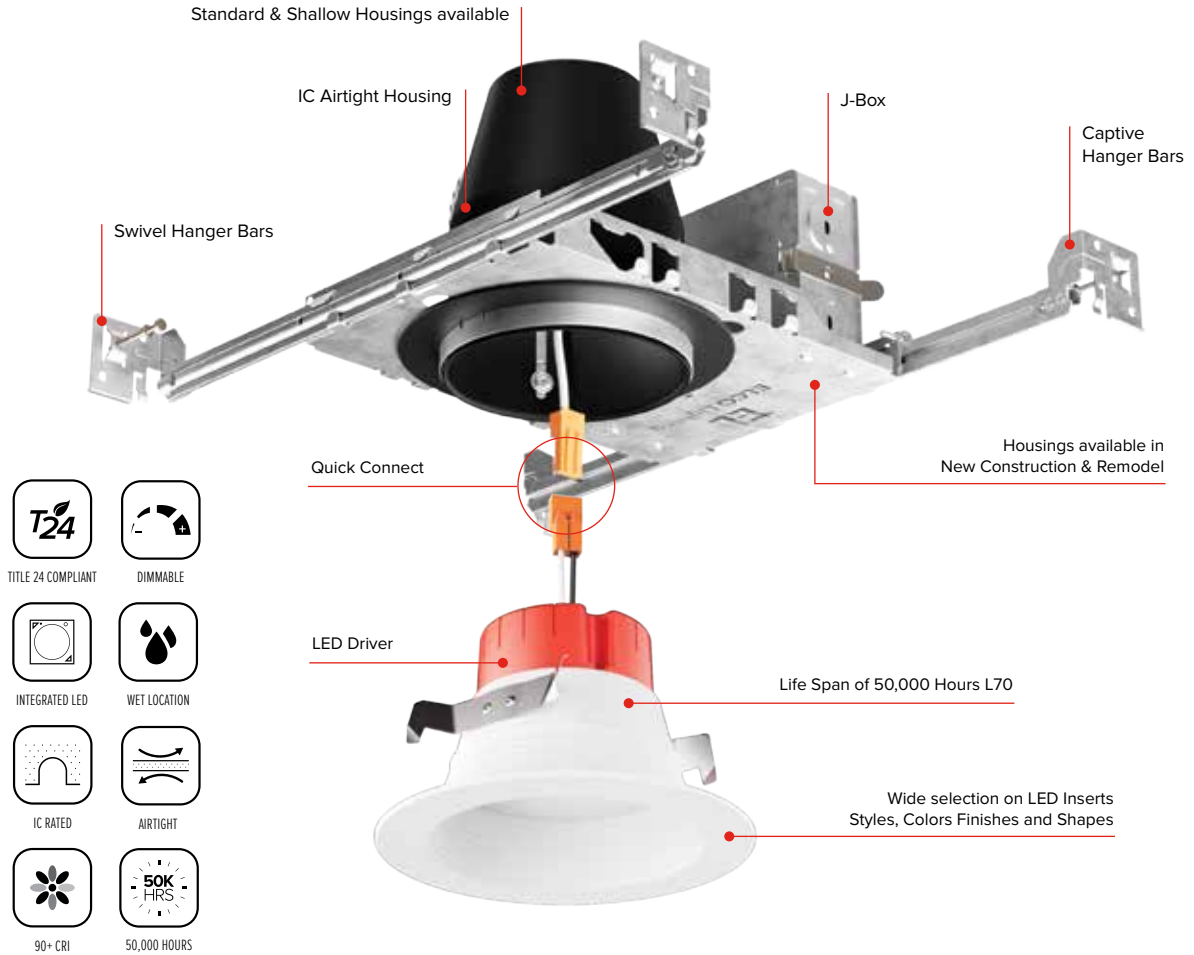






















SIZES	STYLES	LUMENS	COLOR TEMPERATURE
<p>3"</p>	<p>Round (Reflector & Baffle)</p>	<p>600 lm to 2000 lm</p>	<p>2700K - 5000K & Sunset</p>
<p>4"</p>	<p>Square (Reflector & Baffle)</p>		
<p>5"</p>	<p>Adjustable Pull Down</p>		
<p>6"</p>	<p>Gimbal</p>		
<p>8" & 12"</p>			

LED Dedicated




3" LED Housings & Inserts


Description	CAT. #	Specs
 <p>3" New Construction Dedicated LED Housing</p>	EL390ICA	
	EL390ICA-7	Step-down transformer 277V to 120V
	EL390ICA-EM5	Emergency Back-Up
 <p>3" Remodel Dedicated LED Housing</p>	EL390RICA	
 <p>3" New Construction Dedicated LED 2-Hour Fire Rated Housing STC/IIC Sound Rated</p>	EL39FICA	
	EL39FICA-7	Step-down transformer 277V to 120V
 <p>3" Round LED Baffle</p>  	EL311CT3BZ	9W, 700 lm, 2700K - 3500K
	EL311CT5W	10W, 710 lm, 2700K - 5000K
 <p>3" Round LED Reflector</p>  	EL312CT5W	10W, 710 lm, 2700K - 5000K
	EL312CT5BZ	10W, 710 lm, 2700K - 5000K
 <p>3" Round LED Gimbal</p>  	EL313CT5W	9W, 700 lm, 2700K - 5000K
 <p>3" Square LED Baffle</p>  	EL33127W	9W, 675 lm, 2700K
	EL331CT5W	9W, 700 lm 2700K - 5000K
 <p>3" Square LED Reflector</p>  	EL332CT5W	9W, 640 lm, 2700K - 5000K
	EL332CT5BB	9W, 640 lm, 2700K - 5000K
 <p>3" Round Pull Down Adjustable</p> 	EL39727W	10.8W, 800 lm, 2700K
	EL39727BZ	10.8W, 800 lm, 2700K
	EL39727N	10.8W, 800 lm, 2700K
	EL39730W	10.8W, 800 lm, 3000K
	EL39730N	10.8W, 800 lm, 3000K






























4" LED Housings & Inserts

Description	CAT. #	Specs	
 4" IC Airtight New Construction Housing	EL490ICA		
	EL490ICA-7	Step-down transformer 277V to 120V	
	EL490ICA-EM5	Emergency Back-Up	
 4" Remodel Dedicated LED Housing	EL490RICA		
 4" IC Airtight Shallow New Construction Housing	EL492ICA		
	EL492ICA-7	Step-down transformer 277V to 120V	
 4" Remodel Dedicated LED Housing	EL492RICA		
 R-60 Foam Insulation Dedicated LED IC Airtight New Construction Housing	EL490AJICA	4" Housing	
 4" LED Fire Rated ICA New Construction Housing STC/IIC Sound Rated	 EL48FICA		
 4" LED Shallow Fire Rated ICA New Construction Housing	 EL492FICAS	Shallow	
 4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	 EJB4ICA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings.	
<div style="border: 1px solid black; padding: 5px; width: fit-content;"> A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714 </div>			
 4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	 EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs	
	 ELJ4OV	For use with EJB4RICA to cover tabs	
 4" Round LED Reflector Insert	  EL455CT5W	9W, 600 lm, 2700K - 5000K	
 4" Round Sunset Dimming LED Reflector (Automatically Dims from 3000K to 1800K on standard dimmer)	 EL415SDW	10W, 700 lm, Sunset	
	 EL415SDBZ	10W, 700 lm, Sunset	
 4" Round LED Reflector	 	EL41527W	11W, 770 lm, 2700K
		EL41530W	11W, 770 lm, 3000K
		EL41535W	11W, 770 lm, 3500K
		EL41535BZ	11W, 770 lm, 3500K
		EL41540W	11W, 770 lm, 4000K
		EL41550W	11W, 770 lm, 5000K
		EL415CT5W	12W, 800 lm, 2700K - 5000K
		EL415CT5BZ	12W, 800 lm, 2700K - 5000K
EL415CT5BB	12W, 800 lm, 2700K - 5000K		


LED Dedicated






























4" LED Inserts

Description	CAT. #	Specs
 <p>4" HIGHLUMEN Round LED Reflector</p>	 EL41740W	14W, 1200 lm, 4000K
	 EL417CT5W	14W, 1000 lm 2700K - 5000K
 <p>4" HIGHLUMEN Round Haze Reflector</p>	 EL41727H	14W, 1000 lm, 2700K
	EL41735H	14W, 1100 lm, 3500K
	EL41740H	14W, 1200 lm, 4000K
	 EL417CT5H	14W, 1000 lm, 2700K - 5000K
 <p>4" HIGHLUMEN Round Chrome Reflector</p>	EL41727C	14W, 1000 lm, 2700K
	EL41730C	14W, 1000 lm, 3000K
	EL41735C	14W, 1100 lm, 3500K
	EL41740C	14W, 1200 lm, 4000K
 <p>4" Round LED Reflector with 5-CCT & Lumen Switch</p>	 EL427CT5W	12.5W - 18W, 1000 lm - 1500 lm 2700K - 5000K
	 EL427CT5BB	12.5W - 18W, 1000 lm - 1500 lm 2700K - 5000K
	EL427CT5HW	12.5W - 18W, 1000 lm - 1500 lm 2700K - 5000K
 <p>4" Round Sunset Dimming LED Baffle (Automatically Dims from 3000K to 1800K on standard dimmer)</p>	 EL410SDW	10W, 700 lm, Sunset
	 EL410SDBZ	10W, 700 lm, Sunset
 <p>4" Round LED Baffle</p>	 EL41027W	10W, 800 lm, 2700K
	EL41030W	10W, 850 lm, 3000K
	EL41035W	10W, 900 lm, 3500K
	EL41040W	10W, 900 lm, 4000K
 <p>4" Round 5-CCT LED Baffle</p>	 EL410CT5W	12W, 850 lm, 2700K - 5000K
	 EL410CT5BB	12W, 850 lm, 2700K - 5000K
 <p>4" HIGHLUMEN LED Baffle</p>	 EL412CT5W	14W, 1000 lm, 2700K - 5000K
 <p>4" Round 5-CCT LED Shallow Baffle Insert with Adapter</p>	 EL460CT5W	9W, 600 lm, 2700K - 5000K
 <p>4" Round LED Reflector</p>	EL431CT5W	12W, 850 lm, 2700K - 5000K
 <p>4" Round LED Baffle</p>	EL439CT5W	12W, 850 lm, 2700K - 5000K
 <p>4" Round LED Baffle Gimbal</p>	 EL414CT5W	13W, 700 lm, 2700K - 5000K
	EL414CT5B	13W, 700 lm, 2700K - 5000K
	 EL414CT5BZ	13W, 700 lm, 2700K - 5000K

LED Dedicated

























4" LED Inserts

Description	CCT SWITCH	DAMP LOCATION	CAT. #	Specs
 4" Round LED Gimbal			EL416CT5W	9W, 700 lm, 2700K - 5000K
			EL416CT5B	9W, 700 lm, 2700K - 5000K
			EL416CT5BZ	9W, 700 lm, 2700K - 5000K
 4" HIGHLUMEN LED Gimbal			EL416HLCT5W	12W, 1000 lm 2700K - 5000K
 4" Round LED Floating Adjustable Eyeball (90° tilt)			EL456CT5W	9W, 780 lm, 2700K - 5000K
			EL456CT5B	9W, 780 lm, 2700K - 5000K
 4" Square LED Gimbal			EL446CT5W	11W, 700 lm, 2700K - 5000K
			EL446CT5B	11W, 700 lm, 2700K - 5000K
			EL446CT5BZ	11W, 700 lm, 2700K - 5000K
 4" HIGHLUMEN Square LED Gimbal			EL446HLCT5W	12W, 1000 lm, 2700K - 5000K
 4" Square LED Baffle			EL44127W	10W, 700 lm, 2700K
			EL441CT5W	11W, 750 lm, 2700K - 5000K
			EL441CT5BZ	11W, 750 lm, 2700K - 5000K
 4" Square LED Reflector			EL442CT5W	11W, 850 lm, 2700K - 5000K
			EL442CT5BB	11W, 850 lm, 2700K - 5000K
			EL442CT5BZ	11W, 750 lm, 2700K - 5000K
			EL442CT3BB	11W, 750 lm, 2700K - 3500K
EL442CT3BZ	11W, 750 lm, 2700K - 3500K			
 4" Round LED Adjustable Pull Down			EL49727W	12.6W, 800 lm, 2700K
			EL49727B	12.6W, 800 lm, 2700K
			EL49727BZ	12.6W, 800 lm, 2700K
			EL49730W	12.6W, 840 lm, 3000K
			EL49730B	12.6W, 840 lm, 3000K
			EL49730BZ	12.6W, 840 lm, 3000K
 4" Square LED Adjustable Pull Down			EL44727W	12.6W, 800 lm, 2700K
			EL44727B	12.6W, 800 lm, 2700K
			EL44730W	12.6W, 840 lm, 3000K
			EL44730B	12.6W, 840 lm, 3000K
			EL44730BZ	12.6W, 840 lm, 3000K
			EL44730BZ	12.6W, 840 lm, 3000K
 Optional Interchangeables Lenses for LED Adjustable Pull Down (EL447 & EL497 Series - 1st Generation Only)			EP710C	20° beam angle
			EP711C	36° beam angle
			EP712C	60° beam angle
 4" Round LED Adjustable Pull-Down Insert (2nd Generation) Includes 28°, 40° & 60° lenses.			EL49727W2	11W, 950 lm, 2700K
			EL49727B2	11W, 950 lm, 2700K
			EL49727BZ2	11W, 950 lm, 2700K
			EL49730W2	11W, 950 lm, 3000K
			EL49730B2	11W, 950 lm, 3000K
			EL49730BZ2	11W, 950 lm, 3000K
			EL497SDW2	11W, 950 lm, Sunset
			EL497SDW2	11W, 950 lm, Sunset
 4" Square LED Adjustable Pull-Down Insert (2nd Generation) Includes 28°, 40° & 60° lenses.			EL44730W2	11W, 950 lm, 3000K

LED Dedicated















































5" & 6" LED Housings & Inserts

Description	CAT. #	Specs
 <p>5" Dedicated LED IC Airtight New Construction Housings</p>	EL570ICA	
	EL570ICA-7	Step-down transformer 277V to 120V
	EL560ICA	Shallow
 <p>5" Dedicated LED IC Airtight Remodel Housings</p>	EL570RICA	
	EL560RICA	Shallow
 <p>5" New Construction IC Airtight 2-Hour Fire Rated Housing STC/ICC Sound Rated</p> 	EL56FICA	
 <p>6" Dedicated LED IC Airtight New Construction Housings</p>	EL770ICA	
	EL770ICA-7	Step-down transformer 277V to 120V
	EL770ICA-EM5	Emergency Back-Up
 <p>6" Shallow Dedicated LED IC Airtight New Construction Housings</p>	EL760ICA	Shallow
	EL760ICA-7	Step-down transformer 277V to 120V
 <p>6" Dedicated LED IC Airtight Remodel Housings</p>	EL770RICA	
	EL760RICA	Shallow
 <p>6" New Construction IC Airtight 2-Hour Fire Rated Housing STC/ICC Sound Rated</p> 	EL76FICA	
	EL76FICA-7	Step-down transformer 277V to 120V
	EL75FICAS	Shallow
 <p>5"- 6" LED Reflector Insert</p>  	EL655CT5W	10W, 700 lm, 2700K - 5000K
 <p>5"- 6" LED Reflector</p> 	EL61527W	10W, 800 lm, 2700K
	EL61530W	10W, 850 lm, 3000K
	EL61535W	10W, 850 lm, 3500K
	EL61540W	10W, 900 lm, 4000K
	EL61550W	10W, 950 lm, 5000K
	 <p>5"- 6" LED Reflector with 5-CCT Switch</p>  	EL615CT5W
EL615CT5BB		12W, 880 lm - 1080 lm, 2700K - 5000K
EL615CT5BZ		12W, 880 lm - 1080 lm, 2700K - 5000K
 <p>5"- 6" HIGHTECH LED Reflector</p> 	EL61740W	14W, 1200 lm, 4000K
 <p>5"- 6" HIGHTECH 5-CCT Switch LED Reflector</p>  	EL617CT5W	17W, 1100 lm, 2700K - 5000K





































5" & 6" LED Housings & Inserts

Description	CAT. #	Specs
 EXTRA HIGHLUMEN LED Reflector	 EL62727W	20W, 1400 lm, 2700K
 5"- 6" LED Reflector with 5-CCT Switch	  EL627CT5W	20W, 1400 lm, 2700K - 5000K
 EXTRA HIGHLUMEN LED Deep Reflector	 EL62527W	White, 14W, 1000 lm, 2700K
 5"- 6" LED Deep Reflector	  EL625CT5W	White, 12W, 880 lm - 1080 lm, 2700K - 5000K
 EXTRA HIGHLUMEN Haze LED Deep Reflector	 EL62527H EL62535H EL62540H	Haze, 14W, 1000 lm, 2700K Haze, 14W, 1100 lm, 3500K Haze, 14W, 1200 lm, 4000K
 5"- 6" LED Deep Reflector	  EL625CT5H	Haze, 12W, 880 lm - 1080 lm, 2700K - 5000K
 EXTRA HIGHLUMEN Chrome LED Deep Reflector	 EL62527C EL62535C EL62540C	Chrome, 14W, 1000 lm, 2700K Chrome, 14W, 1100 lm, 3500K Chrome, 14W, 1200 lm, 4000K
 5"- 6" LED Deep Reflector	  EL62527C EL62535C EL62540C	Chrome, 14W, 1000 lm, 2700K Chrome, 14W, 1100 lm, 3500K Chrome, 14W, 1200 lm, 4000K
 5"- 6" Round 5-CCT & Lumen Switch LED Reflector	  EL637CT5W EL637CT5BB EL637CT5HW	White, 120V, 2700K - 5000K 1000 lm - 2000 lm Black, 120V, 2700K - 5000K 1000 lm - 2000 lm Haze, 120V, 2700K - 5000K 1000 lm - 2000 lm
 5"- 6" Round Sunser Dimming LED Insert (Automatically Dims from 3000K to 1800K on standard dimmer)	 EL610SDW EL610SDBZ EL615SDW EL615SDBZ	10W, 750 lm, Sunset, Baffle 10W, 750 lm, Sunset, Baffle 10W, 750 lm, Sunset, Reflector 10W, 750 lm, Sunset, Reflector
 5"- 6" Round LED Baffle	 EL61027W EL61030W	12W, 800 lm, 2700K 12W, 850 lm, 3000K
 5"- 6" Round 5-CCT LED Baffle	  EL61027W EL61030W	12W, 800 lm, 2700K 12W, 850 lm, 3000K
 5"- 6" Round 5-CCT LED Baffle	  EL610CT5W EL610CT5BB	12W, 880 lm - 1080 lm, 2700K - 5000K 12W, 880 lm - 1080 lm, 2700K - 5000K
 EXTRA HIGHLUMEN LED Baffle	 EL61140W	14W, 1200 lm, 4000K
 5"- 6" Round 5-CCT LED Baffle	  EL611CT5W	17W, 1100 lm, 2700K - 5000K
 5"- 6" Round 5-CCT LED Baffle	  EL612CT5W	20W, 1400 lm, 2700K - 5000K
 6" Round 5-CCT LED Baffle Insert with Adapter	  EL670CT5W	10W, 700 lm, 2700K - 5000K

LED Dedicated





5" & 6" LED Housings & Inserts



Description	CAT. #	Specs
 6" LED Regressed Gimbal Insert  	EL61327W	17W, 1100 lm, 2700K
	EL61327B	17W, 1100 lm, 2700K
	EL613CT5W	13W, 1000 lm, 2700K - 5000K
	EL613CT5B	13W, 1000 lm, 2700K - 5000K
 5" - 6" LED Gimbal Insert  	EL616CT5W	13W, 1000 lm, 2700K - 5000K
	EL616CT5B	13W, 1000 lm, 2700K - 5000K
	EL616CT5BZ	13W, 1000 lm, 2700K - 5000K
 5" - 6" LED HIGHLUMEN Deep Baffle Insert  	EL62127W	14W, 1000 lm, 2700K
	EL621CT5W	15W, 1000 lm, 2700K - 5000K
 5" LED Square Reflector  	EL552CT5W	15W, 1100 lm, 2700K - 5000K
 6" LED Square Reflector  	EL662CT5W	16W, 1300 lm, 2700K - 5000K
 6" LED Square Baffle  	EL661CT5W	16W, 1300 lm, 2700K - 5000K
 5" Pull Down Adjustable 	EL59727W	12.6W, 840 lm, 2700K
	EL59727B	12.6W, 840 lm, 2700K
	EL59727BZ	12.6W, 840 lm, 2700K
	EL59730W	12.6W, 840 lm, 3000K
	EL59730B	12.6W, 840 lm, 3000K
 6" Pull Down Adjustable 	EL59730BZ	12.6W, 840 lm, 3000K
	EL69727W	12.6W, 840 lm, 2700K
	EL69727B	12.6W, 840 lm, 2700K
	EL69727BZ	12.6W, 840 lm, 2700K
	EL69730W	12.6W, 840 lm, 3000K
 Optional Interchangeables Lenses for LED Adjustable Pull Down (EL597 & EL697 Series - 1st Generation Only) 	EL69730B	12.6W, 840 lm, 3000K
	EP710C	20° beam angle
	EP711C	36° beam angle
 6" Pull Down Adjustable (2nd Generation) Includes 28°, 40° & 60° lenses. 	EP712C	60° beam angle
	EL69727W2	11W, 950 lm, 2700K
	EL69727BZ2	11W, 950 lm, 2700K
	EL69730W2	11W, 950 lm, 3000K
 6" LED Adjustable Baffle Trim PAR30 Gimbal 	EL69730BZ2	11W, 950 lm, 3000K
	EL376CT5W	15W, 1050 lm, 2700K - 5000K
	EL376CT5B	15W, 1050 lm, 2700K - 5000K
 6" LED Adjustable Baffle Trim PAR38 Gimbal 	EL376CT5BZ	15W, 1050 lm, 2700K - 5000K
	EL476CT5W	18W, 1200 lm, 2700K - 5000K
	EL476CT5B	18W, 1200 lm, 2700K - 5000K
 6" LED Adjustable Reflector Trim PAR30 Gimbal 	EL476CT5BZ	18W, 1200 lm, 2700K - 5000K
	EL377CT5W	15W, 1050 lm, 2700K - 5000K
	EL377CT5B	15W, 1050 lm, 2700K - 5000K
 6" LED Adjustable Reflector Trim PAR38 Gimbal 	EL377CT5C	15W, 1050 lm, 2700K - 5000K
	EL477CT5W	18W, 1200 lm, 2700K - 5000K
	EL477CT5B	18W, 1200 lm, 2700K - 5000K
	EL477CT5C	18W, 1200 lm, 2700K - 5000K

LED Dedicated



8" & 12" LED Square Retrofit



Description	CAT. #	Specs
 <p>8" Square LED Retrofit Insert with 5-CCT Switch Perfect for retrofitting existing 8" Square Housings</p>  	EL881CT5W	18W, 1460 lm - 1530 lm, 2700K - 5000K, 120/277V, Triac/ELV



 <p>12" Square LED Retrofit with 5-CCT Switch</p> 	EL1212CT5W	22W, 1450 lm, 2700K - 5000K, 120V, Triac/ELV
--	------------	--

Specialty Retrofits




4" LED BiPin Low Voltage Retrofits

Description	CAT. #	Specs
 <p>4" LED Low Voltage Retrofit Baffle</p> 	EL140CT5W	9W, 600 lm, 2700K - 5000K

 <p>4" LED Low Voltage Retrofit Reflector</p> 	EL141CT5W	9W, 600 lm, 2700K - 5000K
--	-----------	---------------------------


4" and 6" LED CFL Retrofits


Description	CAT. #	Specs
 <p>4" CFL Retrofit</p>	ECF41527W	9W, 850 lm, 2700K
	ECF41530W	9W, 850 lm, 3000K
	ECF41535W	9W, 850 lm, 3500K

* Fits in 13W, 18W, 26W - 4-Pin Connector to adapt to existing 4-Pin Socket (Electronic ballast CFL) included.
2-Pin Connector to adapt to 2-Pin Socket (Magnetic ballast CFL) sold separately*


Housings for 2-Hr Fire Rated Ceilings


THE IDEAL SOLUTION FOR A VARIETY OF RECESSED & CEILING MOUNT LED FIXTURES

 Maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714

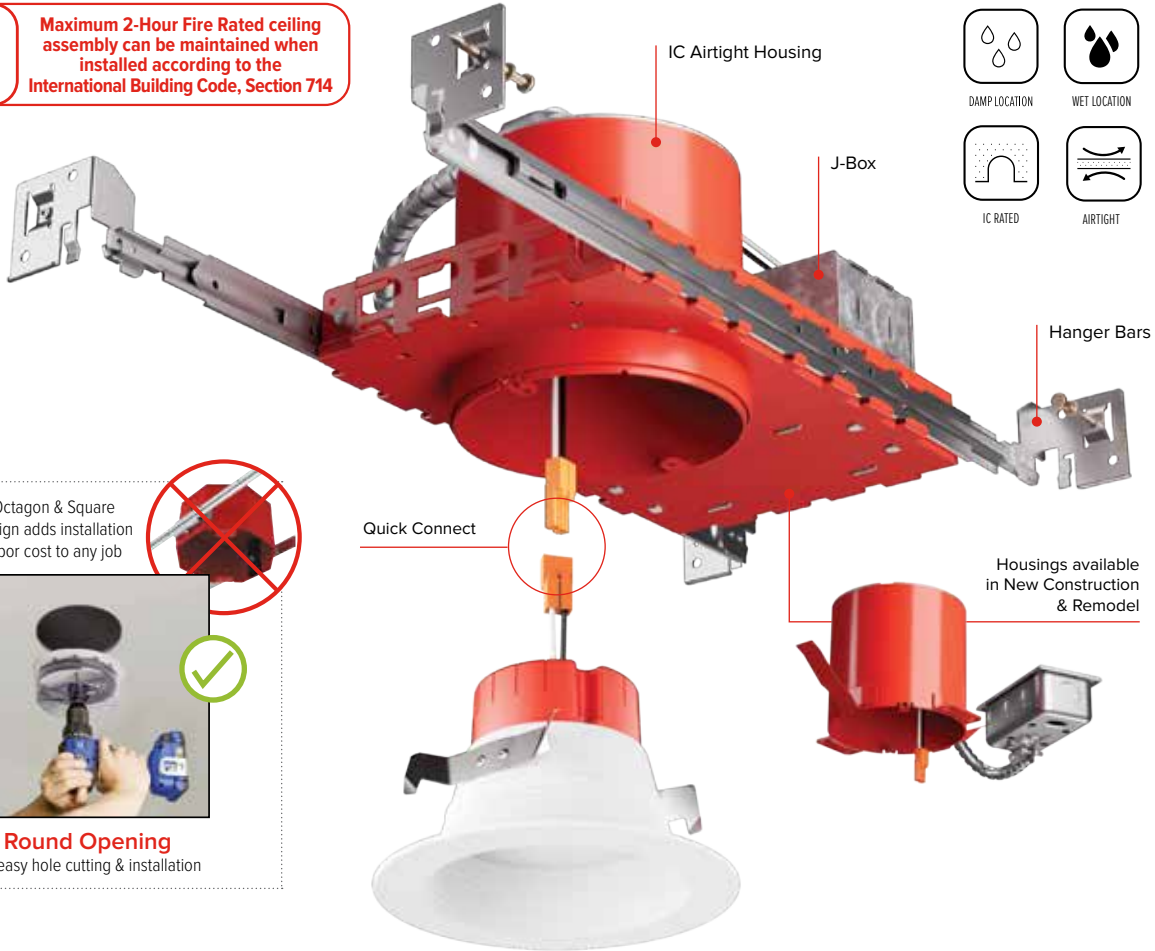

Octagon & Square design adds installation labor cost to any job





Round Opening for easy hole cutting & installation





Covered by U.S. PATENTS and Patents Pending

COMPATIBLE APPLICATIONS





Housings for **2-Hour Fire Rated** Ceilings

Description	CAT. #	Specs	Dist. Net
 <p>4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings</p> 	EJB4ICA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings.	
	EJB4ICA-EM	Housing with Emergency Battery Back-Up	
 <p>4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings</p> 	EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs	
	EJB4RICA-EM	Housing with Emergency Battery Back-Up	
	ELJ4OV	For use with EJB4RICA to cover tabs	

A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714

Compatible Koto™ Fixtures

Koto™ Modules	
ELK0727	ELK11HC
ELK0730	ELK0827-NSP
ELK0735	ELK0830-NSP
ELK0740	ELK08CT5
ELK0927	ELK10CT5
ELK0930	ELK0727-FC
ELK0935	ELK0730-FC
ELK0940	ELK0735-FC
ELK09SD	ELK0740-FC
ELK1127	ELK07SD-FC
ELK1130	ELK1327
ELK1135	ELK1330
ELK1140	ELK1335
ELK11SD	ELK1340
Koto™ Trims	
ELK4116	ELK4713
ELK4127	ELK4715
ELK4129	ELK4216
ELK4172	ELK4229
ELK4179	ELK4227
ELK4188	ELK4714
ELK4710	ELK4716

Compatible 4" LED Inserts

4" LED inserts	
EL41027	EL415CT5
EL41030	EL41627
EL41035	EL416CT3
EL41040	EL416CT5
EL410CT5	EL41727
EL412CT5	EL41730
EL41427	EL41735
EL41435	EL41740
EL414CT5	EL417CT5
EL41527	EL455CT5
EL41530	EL44127
EL41535	EL441CT5
EL41540	EL442CT3
EL41550	EL442CT5
EL415SD	EL446CT5

Compatible LED Sky Panels™

LED Sky Panels™	
ELSP43CT5	ELSP12CT5
ELSP4430	ELSP2240
ELSP4440	ELSP22CT5
ELSP63CT5	ELSP63DXCT3
ELSP66CT5	ELSP83DXCT3
ELSP8327	ELSP1224CT5
ELSP83CT3	ELSP1248CT5
ELSP8830	ELSP2424CT3
ELSP8840	ELSP2448CT5





Compatible Ceiling Mounts

Darby™ Fixtures	Dustin™ Fixtures
ELD11030	ELD31430
ELD11040	ELD31440
ELD14CT5	ELD32230
ELD16CT5	ELD32240
ELD21030	ELD32430
ELD21040	ELD32440
ELD31230	ELD32630
ELD31240	ELD32640


Compatible LED Disk Lights

Alva™ LED Disk Lights	
ELSF1127	ELSF4030
ELSF11CT5	ELSF40CT5









4" LED Insert & Junction Boxes for **2-Hour Fire Rated** Ceilings

Description	CAT. #	Specs
 <p>4" Square Standard Deep Junction Box with Hanger Bars for use in Fire Rated Ceilings</p>	EJB44ICA	IC Airtight for use in IC and Non-IC applications. 4" Sq x 3 1/2" H
 <p>4" Square Standard Deep Junction Box for use in Fire Rated Ceilings</p>	ELJ443	IC Airtight for use in IC and Non-IC applications. 4" Sq x 3 1/2" H
 <p>4" LED Junction Box 1000 lm Insert</p> 	ELJ42230W	15W, 1000 lm, 3000K








LED Dedicated



Fire Products

Description	CAT. #	Specs
 1-Hour Fire Enclosure	FIREENCL	
	FIREENCL-S	Shallow
 Mica Fire tape for use with FIREENCL	FIRETAPE	16' Roll
 Recessed Fixture 2-Hour Fire Rated Cover	FIRECVR	Made of heat activated intumescent material
 2-Hour Fire Rated LED Housings with Quick Connect	EL39FICA	3" LED Housing
	EL48FICA	4" LED Housing
	EL56FICA	5" LED Housing
	EL76FICA	6" LED Housing
 2-Hour Fire Rated Medium Base Housing with E26 Base Socket	EL99FICA	4" LED Housing
	EL5FICA	5" LED Housing
	EL7FICA	6" LED Housing
 2-Hour Fire Rated Housing with GU10 Socket	EL39FICA-GU10	3" LED Housing
	EL49FICA-GU10	4" LED Housing
 2-Hour Fire Rated Shallow Housing	EL492FICAS	4" LED Shallow Housing
 2-Hour Fire Rated Shallow Housing	EL75FICAS	6" LED, Shallow Housing


Emergency Battery Backups & Accessories

Description	CAT. #	Specs
 Emergency Battery Backup (Single Whip - 90 Min. of Emergency Light)	KEM-LD1	8W, Up to 750 lm EM output
	KEM-LD2	12W, Up to 1100 lm EM output
 Emergency Battery Backup (Double Whip - 90 Min. of Emergency Light)	KEM-LD3	8W, Up to 750 lm EM output
	KEM-LD4	12W, Up to 1100 lm EM output
 Emergency Battery Backup (90 Min. of Emergency Light)	KEM-LD5	25W, 120/277V, 50/60 Hz. Compatible with EL390, EL490, EL492, EL560, EL570, EL760, EL770 Series
 Emergency Battery Backup (90 Min. of Emergency Light)	KEM-ERT	25W, 100/277V AC, 50/60 Hz. Compatible to all 3"-8" Elm Fixtures (ERT3, ERT4, ERT6, & ERT8) & Canless Koto System
 Test Switch	T-SWITCH	for KEM Battery Backups
 Test Switch for KEM-LD1/2/3	T-SWITCH-LD1	for KEM-LD1, KEM-LD2, and KEM-LD3
 Test Switch for KEM-LD5	T-SWITCH-LD5	for KEM-LD5

The **Elm™ System**

Ultra Slim LED Panel Lights & LED Downlights

DESIGNED TO BE INSTALLED WITHOUT A RECESSED HOUSING!

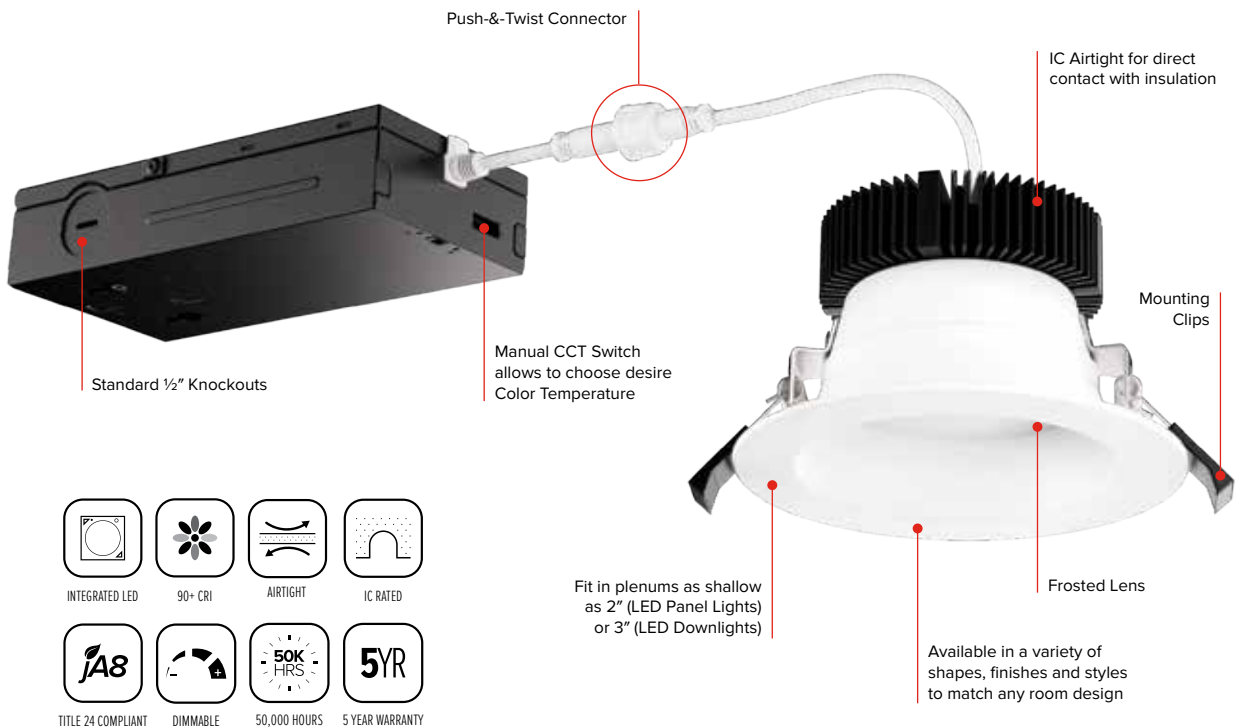











New Construction application requires optional mounting plate or frame. Remodel application requires no additional accessories

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
<p>2" 3" 4" 6" 8"</p>	<p>Round (2", 3", 4", 6" & 8")</p> <p>Square (2", 4" & 6")</p>	<p>White Black Bronze Nickel</p>	<p>350 lm to 2500 lm</p>	<p>2700K - 5000K</p>






Elm™ System LED Downlights

Description	CAT. #	Specs
-------------	--------	-------

2" Elm™ System LED Downlights featuring 5-CCT Switch to choose desire color temperature (2700K-5000K), and maximum flexibility by mix-&-matching any round or square trim with desire reflector or baffle finish.

Step 1: Choose a Module	Description	CCT SWITCH	DAMP LOCATION	CAT. #	Specs	
Step 1: Choose a Module	 2" LED Round Elm™ Downlight with 5-CCT Switch			ERT2L06CT5	8W, 600 lm, 120V, 2700K - 5000K, Triac/ELV dimmable	
	 2" HIGHLUMEN™ LED Round Elm™ Downlight with 5-CCT Switch			ERT2HL08CT5	12W, 850 lm, 2700K - 5000K, 120V, Triac/ELV dimmable	
				ERT2HL10CT5	15W, 1000 lm, 2700K - 5000K, 120V, Triac/ELV dimmable	
Step 2: Choose a Reflector or Baffle	 Reflector for 2" LED Elm™ Downlights			ERT210W	White	
				ERT210B	Black	
				ERT210H	Haze	
				ERT210BZ	Bronze	
Step 2: Choose a Reflector or Baffle	 Baffle for 2" LED Elm™ Downlights			ERT214W	White	
				ERT214B	Black	
				ERT214BZ	Bronze	
Step 3: Choose a Trim	 Round Flexa™ Trim for 2" Elm™ LED Downlights			ERT2RW	White	
				ERT2RB	Black	
				ERT2RBZ	Bronze	
	Step 3: Choose a Trim	 Square Flexa™ Trim for 2" Elm™ LED Downlights			ERT22SQW	White
					ERT22SQB	Black

4" Elm™ System LED Downlights featuring 5-CCT Switch to choose desire color temperature (2700K-5000K), Our NEW LED Light Engine and trims feature twist-on mechanism for easy installation.





























Step 1: 4" LED Module	Description	CCT SWITCH	WET LOCATION	CAT. #	Specs
Step 1: 4" LED Module	 4" LED Round Elm™ Downlight with 5-CCT Switch			ERT4L10CT5	15W, 1000 lm, 120V, 2700K - 5000K, Triac/ELV dimmable
Step 2: Choose a Trim	 4" Round Reflector Trims			ERT415W	White
				ERT415BB	Black
	 4" Square Reflector Trims			ERT445W	White
				ERT445BB	Black

ELM™ System

2"-8" Slim Panels



































Elm™ System LED Downlights & Slim Panels IC Rated

Description		CAT. #	Specs
 <p>New Construction Frame for Slim Panels</p>	 <p>TRUE NAIL</p>	E2LF1	2" Frame
		E4LF1	4" Frame
		E6LF1	6" Frame
		E8LF1	8" Frame
 <p>New Construction Round Mounting Plates</p>		EMP4	4" Plate
		EMP6	6" Plate
		EMP8	8" Plate
 <p>New Construction Universal Frame for Elm™ System Downlights</p>		E246LF1	For use with 2", 4" or 6" Round Downlights
 <p>2" LED Round Downlights</p>	 	ERT210CT5W	Reflector 8W, 550 lm, 2700K - 5000K
		ERT214CT5W	Baffle 8W, 550 lm, 2700K - 5000K
 <p>2" LED Square Downlights</p>	 	ERT213CT5W	Reflector 8W, 600 lm, 2700K - 5000K
		ERT215CT5W	Baffle 8W, 600 lm, 2700K - 5000K
 <p>2" LED Gimbal Lights</p>	 	ERT218CT5W	5W, 350 lm, 2700K - 5000K
		ERT218CT5BZ	5W, 350 lm, 2700K - 5000K
 <p>3" Adjustable Eyeball Downlight with 5-CCT Switch</p>	 	ERT317CT5W	6W, 450 lm, 2700K - 5000K
 <p>3" Gimbal with 5-CCT Switch</p>	 	ERT318CT5W	8W, 600 lm, 2700K - 5000K
		ERT318CT5B	8W, 600 lm, 2700K - 5000K
		ERT318CT5BZ	8W, 600 lm, 2700K - 5000K
 <p>3" Ultra Slim LED Panel Light with 5-CCT Switch</p>	 	ERT311CT5W	10W, 600 lm, 2700K - 5000K, 120V
 <p>4" Slim LED Panel Light with 5-CCT Switch</p>	 	ERT411CT5W	9W, 500 lm, 2700K - 5000K
		ERT411CT5BZ	9W, 500 lm, 2700K - 5000K
 <p>4" HIGHLUMEN Slim LED Panel Light with 5-CCT Switch</p>	 	ERT412CT5W	12W, 700 lm, 2700K - 5000K
		ERT412CT5BZ	12W, 700 lm, 2700K - 5000K



Elm™ System LED Downlights & Slim Panels IC Rated

Description	CAT. #	Specs
 <p>4" 120/277/347V, 0-10V LED Slim Panel Light with 5-CCT Switch</p>  	ERT41DXCT5W	12W, 750 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 <p>4" Retrofit LED Recessed Downlight 5-CCT with Separate J-Box</p>  	ERT415CT5W	11W, 750 lm, 2700K - 5000K, 120V, White
	ERT415CT5BB	11W, 750 lm, 2700K - 5000K, 120V, Black
	ERT415CT5BZ	11W, 750 lm, 2700K - 5000K, 120V, Bronze
 <p>4" 120/277/347V, 0-10V Recessed Downlight with 5-CCT Switch</p>  	ERT495CT5DXW	11W, 750 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 <p>4" LED Recessed Gimbal Downlight with 5-CCT Switch</p>  	ERT413CT5W	10W, 650 lm, 2700K - 5000K, 120V
 <p>4" 120/277/347V, 0-10V LED Recessed Gimbal with 5-CCT Switch</p>  	ERT413CT5DXW	10W, 650 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
	 <p>4" LED Sloped Round Regressed Gimbal with 5-CCT Switch</p>  	ERT425CT5W
 <p>4" High Lumen LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch</p>  	ERT475CT5DW	12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White
	ERT475CT5DH	12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Haze
	ERT475CT5DHW	12W - 25W, 1000 lm - 2000 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, Haze/White Ring
 <p>4" LED Square Panel</p> 	ERT44130W	9W, 550 lm, 3000K
	ERT44130N	9W, 550 lm, 3000K
	ERT44130BZ	9W, 550 lm, 3000K
	ERT44140W	9W, 600 lm, 4000K
	ERT44140N	9W, 600 lm, 4000K
	ERT44140BZ	9W, 600 lm, 4000K
 <p>4" LED Square Panel</p> 	ERT441CT5W	12W, 700 lm, 2700K - 5000K
	ERT416CT5W	9W, 780 lm, 2700K - 5000K
 <p>4" Round Adjustable Eyeball Downlight with 5-CCT Switch</p>  	ERT416CT5BZ	9W, 780 lm, 2700K - 5000K
	ERT416CT5B	9W, 780 lm, 2700K - 5000K
	ERT61130N	12W, 750 lm, 3000K
 <p>6" LED Round Panel</p> 	ERT61130BZ	12W, 750 lm, 3000K
	ERT61140W	12W, 800 lm, 4000K
	ERT61140N	12W, 800 lm, 4000K
	ERT61140BZ	12W, 800 lm, 4000K
	ERT611CT5W	12W, 700 lm, 2700K - 5000K
 <p>6" Ultra Slim LED Round Panel Light with 5-CCT Switch</p> 	ERT611CT5W	12W, 700 lm, 2700K - 5000K



Elm™ System LED Downlights & Slim Panel IC Rated






Description	CAT. #	Specs
 <p>6" HIGHLUMEN LED Panel</p>	ERT61230N	15W, 975 lm, 3000K
	ERT61230BZ	15W, 975 lm, 3000K
	ERT61240W	15W, 1050 lm, 4000K
	ERT61240N	15W, 1050 lm, 4000K
	ERT61240BZ	15W, 1050 lm, 4000K
 <p>6" Ultra Slim LED Round Panel Light with 5-CCT Switch</p>	ERT612CT5W	15W, 950 lm, 2700K - 5000K, 120V
 <p>6" 120/277/347V Ultra Slim LED Panel Light with 5-CCT Switch</p>	ERT61DXCT5W	15W, 950 lm, 2700K - 5000K, 120/277/347V
 <p>6" LED Recessed Gimbal Downlight with 5-CCT Switch</p>	ERT613CT5W	15W, 900 lm, 2700K - 5000K, 120V
 <p>6" 120/277/347V, 0-10V LED Recessed Gimbal with 5-CCT Switch</p>	ERT613CT5DXW	15W, 900 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
 <p>6" Shallow LED Recessed Downlight with 5-CCT Switch</p>	ERT615CT5W	12W, 900 lm, 2700K - 5000K, 120V
 <p>6" Deep LED Recessed Downlight with 5-CCT Switch</p>	ERT625CT5W	12W, 950 lm, 2700K - 5000K, 120V
 <p>6" 120/277/347V Deep LED Recessed Downlight with 5-CCT Switch</p>	ERT695CT5DXW	12W, 950 lm, 2700K - 5000K, 120/277/347V, Triac/ELV/0-10V
<p>6" HIGHLUMEN LED Reflector Recessed Downlight with 5-CCT & 5-Lumen Switch</p>	ERT685CT5DW	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All White
	ERT685CT5DH	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, All Haze
	ERT685CT5DHW	12W - 32W, 1000 lm - 2500 lm, 2700K - 5000K, 120/277V, Triac/ELV/0-10V, Haze/White Ring
<p>6" LED Square Panel</p>	ERT66130W	12W, 750 lm, 3000K
	ERT66130N	12W, 750 lm, 3000K
	ERT66130BZ	12W, 750 lm, 3000K
	ERT66140N	12W, 800 lm, 4000K
	ERT66140BZ	12W, 800 lm, 4000K
	ERT661CT5W	12W, 700 lm, 2700K - 5000K

ELM™ System



2"-8" Slim Panels




Elm™ System Slim Panel IC Rated

Description	CAT. #	Specs
 <p>8" HIGHLUMEN LED Panel</p> 	ERT81230W	33W, 2350 lm, 3000K
 <p>8" 120/277/347V Ultra Slim LED Panel Light with 5-CCT Switch</p>  	ERT81DXCT5W	20W, 1200 lm, 2700K - 5000K, 120/277/347V

Elm™ System Accessories

Description	CAT. #	Specs
 <p>Extension Cord for ELM™ System Fixtures</p>	ECNE10	10" Extension Cord
	ECNE11	10 ft. Extension Cord
 <p>Emergency Battery Backup for 3" - 8" ELM™ System Fixtures</p>	KEM-ERT	90 min. of emergency light. Compatible with 3" - 8" Elm™ system fixtures (ERT3, ERT4, ERT6, & ERT8 Series)


Easy Pro™ Integral Junction Box LED Inserts

Description	CAT. #	Specs
 <p>6" Easy Pro™ Jbox LED Insert</p>	ELR68530W	23W, 1400 lm, 3000K

Energy efficient LED Lighting fixtures designed to be easily install without the need of any recessed housing. For direct contact with insulation. Title 24 Compliant. ENERGY STAR Compliant. ETL Listed.

The Ply™ System

0-10V Dimmable LED & Housings

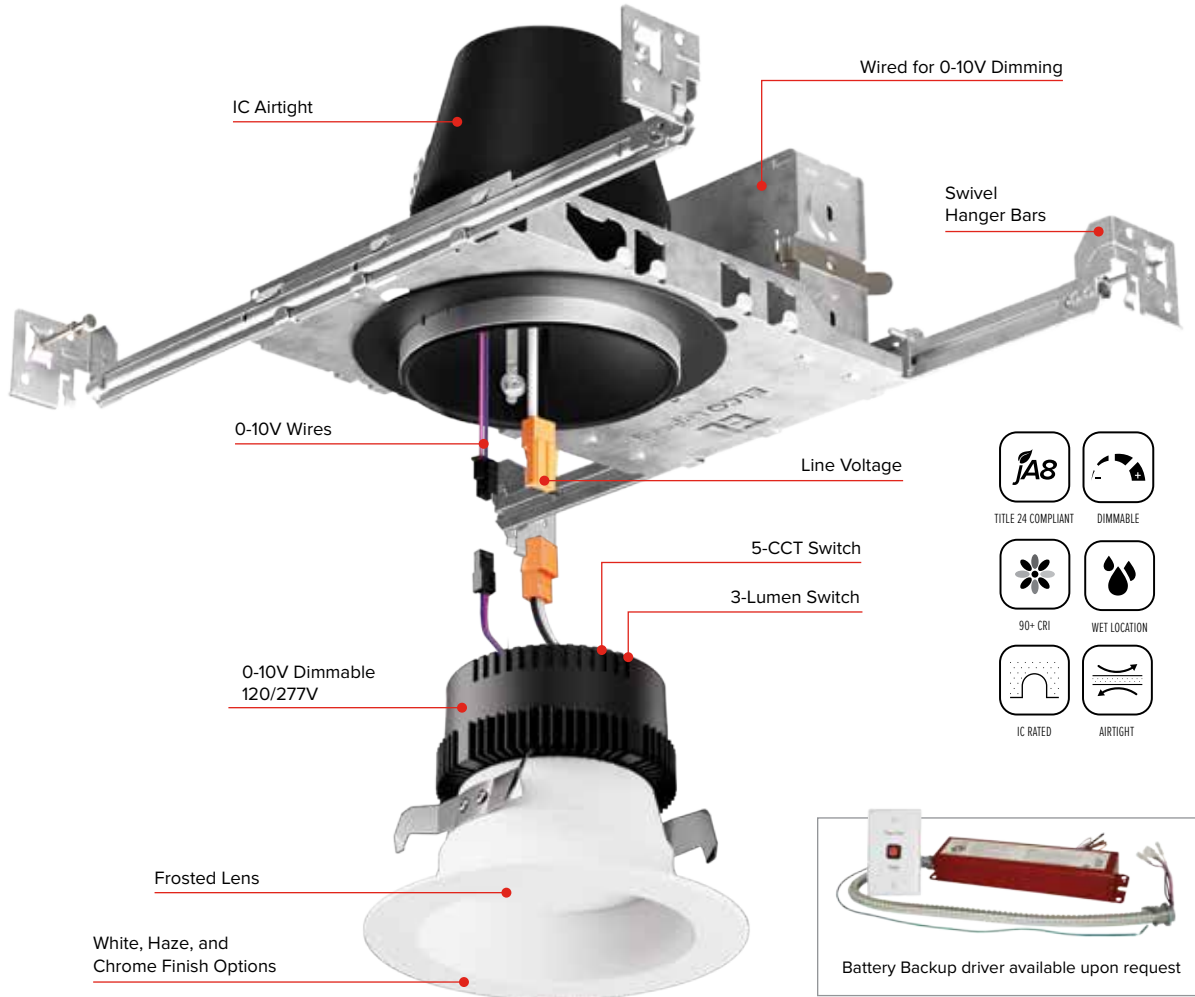

SIZE	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
<p>4"</p>	<p>Downlight</p>	White Black Bronze Chrome Haze	<p>650 lm to 2000 lm</p>	<p>2700K - 5000K</p>
<p>6"</p>	<p>Adjustable</p>			

The Ply™ System

0-10V Dimmable LED Recessed Fixtures



4" 0-10V Dedicated LED Housings

Description	CAT. #	Specs
<p>4" New Construction 2-Hour Fire Rated Housing (Sound Rated)</p>	EL49FICDXA	4" Housing
<p>4" Standard IC Airtight New Construction Housing</p>	EL490ICDXA	4" Housing
	EL490ICDXA-EM5	Emergency Back-Up
<p>4" Standard IC Airtight Remodel Housing</p>	EL490RICDXA	4" Housing
<p>4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>	EJB4ICDXA	New Construction Housing with quick connector for 2-Hour Fire Rated ceilings. (For use with EL495 Series Only)
<p>A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714</p>		
<p>4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>	EJB4RICDXA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs. (For use with EL495 Series Only)
	ELJ4OV	For use with EJB4RICDXA to cover tabs

4" 0-10V LED Inserts 120/277V




Description	CAT. #	Specs
<p>4" 0-10V LED Insert with 5-CCT & 3-Lumen Switch</p> <p>LUMEN Switch CCT SWITCH</p>	EL475CT5DW	All White, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
	EL475CT5DH	All Haze, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
	EL475CT5DHW	Haze/White Ring, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
	EL475CT5DBB	All Black, 2700K - 5000K, 120/277V 850 lm (9.5W), 1000 lm (13.5W), 1500 lm (18W)
<p>4" 0-10V LED Insert</p>	EL49530DW	All White, 12W, 800 lm, 3000K, 120/277V
	EL49530DHW	Haze/White Ring, 12W, 800 lm, 3000K, 120/277V
	EL49530DCW	Chrome/White Ring, 12W, 800 lm, 3000K, 120/277V
	EL49540DCW	Chrome/White Ring, 12W, 900 lm, 4000K, 120/277V
<p>4" 0-10V LED Round Adjustable GimballInsert</p>	EL41427DXW	All White, 10.5W, 650 lm, 2700K, 120/277V, 60°
	EL41430DXW	All White, 10.5W, 680 lm, 3000K, 120/277V, 60°
	EL41430DXB	All Black, 10.5W, 680 lm, 3000K, 120/277V, 60°
<p>4" Round Adjustable 0-10V LED LED Insert</p> <p>Optional Lens: EP710C (20°) EP712C (60°)</p>	EL41435DXW	All White, 10.5W, 710 lm, 3500K, 120/277V, 60°
	EL49727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
	EL49727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
	EL49727DXBZ	Bronze, 12.6W, 850 lm, 2700K, 120/277V
	EL49730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
	EL49730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V
	EL49730DXBZ	Bronze, 12.6W, 900 lm, 3000K, 120/277V
<p>4" Square Adjustable 0-10V LED LED Insert</p> <p>Optional Lens: EP710C (20°) EP712C (60°)</p>	EL44727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
	EL44727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
	EL44727DXBZ	Bronze, 12.6W, 850 lm, 2700K, 120/277V
	EL44730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
	EL44730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V
EL44730DXBZ	Bronze, 12.6W, 900 lm, 3000K, 120/277V	

The Ply™ System









0-10V Dimmable LED Recessed Fixtures




6" 0-10V Dedicated LED Housings

Description	CAT. #	Specs
 <p>6" 0-10V New Construction 2-Hour Fire Rated Housing</p>	EL75FICDXAS	6" Shallow Housing
	EL76FICDXA	6" Housing
 <p>6" 0-10V New Construction Housing</p>	EL760ICDXA	6" Shallow Housing
	EL760ICDXAEM	Emergency Back-Up
	EL770ICDXA	6" Housing
	EL770ICDXAEM	Emergency Back-Up
 <p>6" 0-10V Remodel Housing</p>	EL760RICDXA	6" Shallow Housing
	EL770RICDXA	6" Housing

6" 0-10V LED Inserts 120/277V

Description	CAT. #	Specs
 <p>6" 0-10V LED Insert with 5-CCT & 3-Lumen Switch</p> <p> </p> <p></p>	EL685CT5DW	All White, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DH	All Haze, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DHW	Haze/White Ring, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DCW	Chrome/White Ring, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
	EL685CT5DBB	All Black, 2700K - 5000K, 120/277V 1000 lm (13W), 1500 lm (19W), 2000 lm (24W)
 <p>6" 0-10V LED Insert</p> <p></p>	EL69535DCW	Chrome/White Ring, 20W, 1425 lm, 3500K, 120/277V
 <p>6" Round Adjustable LED Insert</p> <p></p>	EL69727DXW	All White, 12.6W, 850 lm, 2700K, 120/277V
	EL69727DXB	All Black, 12.6W, 850 lm, 2700K, 120/277V
	EL69727DXBZ	All Bronze, 12.6W, 850 lm, 2700K, 120/277V
	EL69730DXW	All White, 12.6W, 900 lm, 3000K, 120/277V
	EL69730DXB	All Black, 12.6W, 900 lm, 3000K, 120/277V
EL69730DXBZ	All Bronze, 12.6W, 900 lm, 3000K, 120/277V	







0-10V Zinnia™ LED Undercabinet Bar

Description	CAT. #	Specs
 <p>0-10V Zinnia™ LED Undercabinet Bar</p> <p>Bronze available (BZ)</p>	EUM41DXW	12 ¼" White, 5W, 450 lm, 3000K, 120V
	EUM42DXW	21" White, 9W, 800 lm, 3000K, 120V
	EUM43DXW	24 ¼" White, 10W, 900 lm, 3000K, 120V
	EUM44DXW	33 ¼" White, 15W, 1350 lm, 3000K, 120V
	EUM45DXW	42 ¼" White, 20W, 1800 lm, 3000K, 120V
	EUM41DXW-7	12 ¼" White, 5W, 450 lm, 3000K, 277V
	EUM42DXW-7	21" White, 9W, 800 lm, 3000K, 277V
	EUM43DXW-7	24 ¼" White, 10W, 900 lm, 3000K, 277V
	EUM44DXW-7	33 ¼" White, 15W, 1350 lm, 3000K, 277V
	EUM45DXW-7	42 ¼" White, 20W, 1800 lm, 3000K, 277V

The Birch™ System

Commercial LED Downlights




-  INTEGRATED LED
-  90+ CRI
-  DIMMABLE
-  DAMP LOCATION
-  5 YEAR WARRANTY
-  50,000 HOURS


SIZE & STYLE




BEAM ANGLES

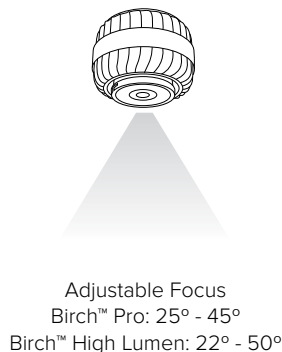

FINISHES



LUMENS




COLOR TEMPERATURE









The Birch™ System





Architectural Commercial LED Lighting



4", 6", & 8" Round Commercial Frames






	Description	Cat. #	Specs
	New Construction Architectural Frames (hanger bars required)	ELB4EH	4" Architectural Frame
		ELB6EH	6" Architectural Frame
	New Construction Architectural Frames with 90 min. Emergency Battery Backup (hanger bars required)	ELB4EH-EM5	4" Architectural Frame with Battery Backup
		ELB6EH-EM5	6" Architectural Frame with Battery Backup
	27" Flat Hanger Bars	FB27	For wood construction (Set of 2)
	26" C-Channel Hanger Bars	CH26	For T-Bar ceilings (Set of 2)
	New Construction Plaster Frames with Hanger Bars	ELB4PF	4" Plaster Frame
		ELB6PF	6" Plaster Frame
		ELB8PF	8" Plaster Frame
	New Construction Plaster Frames with Hanger Bars with 90 min. Emergency Battery Backup	ELB4PF-EM5	4" Plaster Frame with Battery Backup
		ELB6PF-EM5	6" Plaster Frame with Battery Backup
		ELB8PF-EM5	8" Plaster Frame with Battery Backup

4" Square Commercial Frames

	Description	Cat. #	Specs
	New Construction Architectural Frames (hanger bars required)	ELB44SQEH	4" Architectural Frame
		ELB44SQEH-EM5	4" Architectural Frame with Battery Backup
	27" Flat Hanger Bars	FB27	For wood construction (Set of 2)
	26" C-Channel Hanger Bars	CH26	For T-Bar ceilings (Set of 2)
	New Construction Plaster Frames with Hanger Bars	ELB44SQPF	4" Plaster Frame
		ELB44SQPF-EM5	4" Plaster Frame with Battery Backup




Retrofits for Birch™ Fixtures





Description	Cat. #	Specs
 <p>Remodel/Retrofit</p>	 <p>ELBRMD</p>	<p>Remodel/Retrofit (Add architectural downlighting to an existing ceiling)</p>
 <p>Remodel/Retrofit with 90 min. Emergency Battery Backup</p>	<p>ELBRMD-EM5</p>	<p>Remodel/Retrofit with Battery Backup</p>
 <p>Retrofit</p>	 <p>ELBRT</p>	<p>Retrofit (To convert an existing fixture to a Birch™ fixture)</p>

The Birch™ System


Architectural Commercial LED Lighting




Birch™ LED Modules & Trims

Description	CAT. #	Specs
 <p>Birch™ Pro LED Module 750 lm - 1500 lm with 5-CCT Switch</p> <p>5-CCT Switch  2700K - 5000K</p> <p>Lumen Switch  7L - 750 lm, 10W 10L - 1000 lm, 12W 15L - 1500 lm, 20W</p>  IC RATED 	ELB15RCT5ICA	<ul style="list-style-type: none"> • IC Rated for IC and Non-IC applications • Focus Beam Angle Adjustment (25°-45°) with the ease of a manual twist • Works with 4", 6", and 8" commercial frames, remodel and retrofit applications <p>2700K - 5000K, 120/277V, 0-10V dimming</p>
 <p>Birch™ High Lumen LED Module 1250 lm - 3000 lm</p> <p>Lumen Switch  12L - 1250 lm, 13W 20L - 2000 lm, 20W 30L - 3000 lm, 35W</p>  HIGHLUMEN 	ELB30R30 ELB30R35 ELB30R40	<ul style="list-style-type: none"> • Non-IC Rated for Non-IC applications • Focus Beam Angle Adjustment (22°-50°) with the ease of a manual twist • Works with 4", 6", and 8" commercial frames, remodel and retrofit applications <p>3000K, 120/277V, 0-10V dimming 3500K, 120/277V, 0-10V dimming 4000K, 120/277V, 0-10V dimming</p>
 <p>Birch™ High Lumen LED Module 3200 lm - 5000 lm</p> <p>Lumen Switch  32L - 3200 lm, 32W 40L - 4000 lm, 40W 50L - 5000 lm, 55W</p>  EXTRA HIGHLUMEN 	ELB50R30 ELB50R35 ELB50R40	<ul style="list-style-type: none"> • Non-IC Rated for Non-IC applications • Focus Beam Angle Adjustment (22°-50°) with the ease of a manual twist • Works with 6" and 8" commercial frames, remodel and retrofit applications (ELB610 and ELK810 trim series only) <p>3000K, 120/277V, 0-10V dimming 3500K, 120/277V, 0-10V dimming 4000K, 120/277V, 0-10V dimming</p>
 <p>4" Round Reflector Trim</p>	ELB410W ELB410H ELB410HW ELB410BB	All White All Haze Haze/White Ring All Black
 <p>4" Square Reflector Trim</p>	ELB440W ELB440H ELB440HW ELB440BB	All White All Haze Haze/White Ring All Black
 <p>6" Round Reflector Trim</p>	ELB610W ELB610H ELB610HW ELB610BB	All White All Haze Haze/White Ring All Black
 <p>6" Round Adjustable Reflector Trim</p>	ELB629W ELB629B ELB629H	All White All Black All Haze
 <p>8" Round Reflector Trim</p>	ELB810W ELB810H	All White All Haze

5" Shallow LED **Square Frames** & **Light Engines**

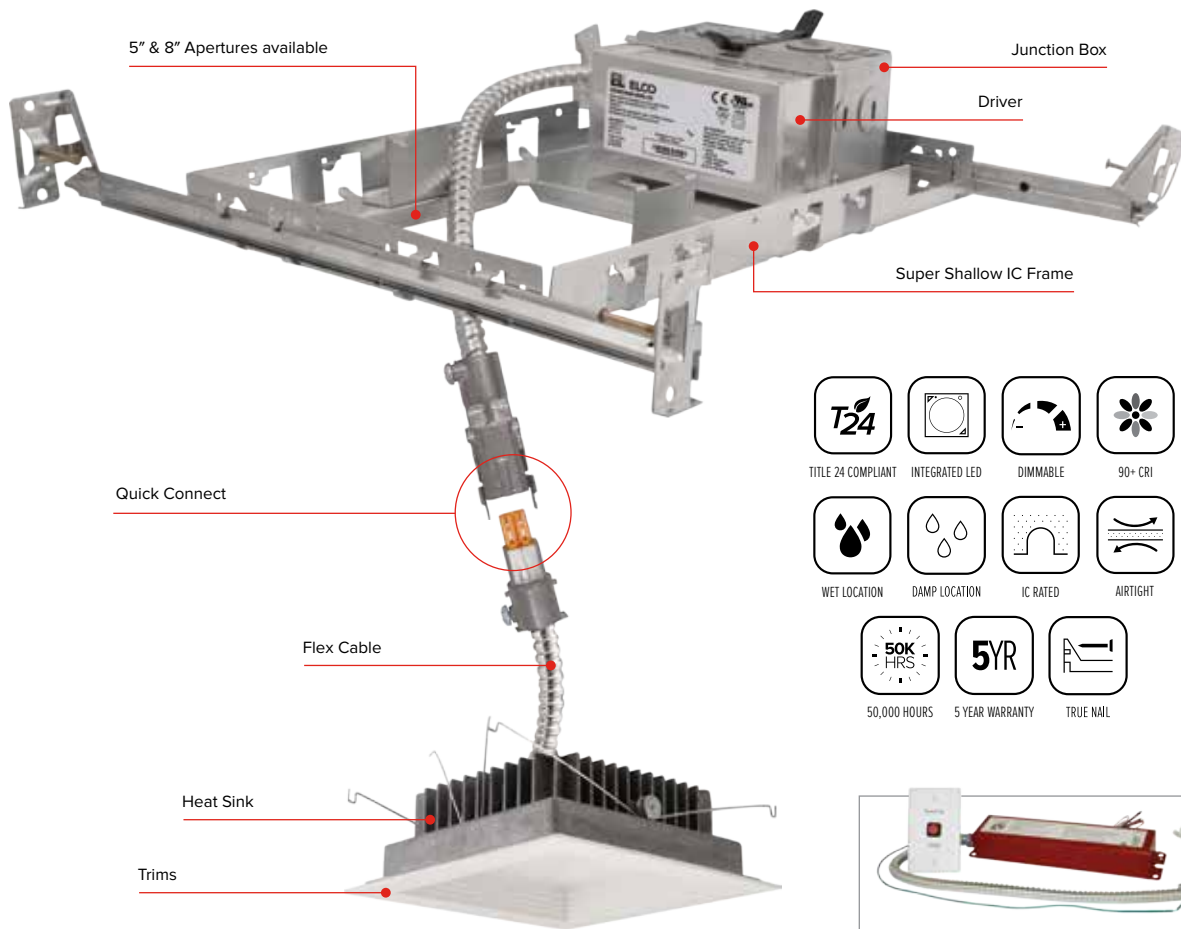

STYLES




Reflector

Baffle

Pull Down

FINISHES




White

Black

Bronze

LUMENS



1100 lm to 2000 lm

COLOR TEMPERATURE





3000K - 4000K

The Maple™ System









5" LED Square Frame & Light engines



5" Maple™ Shallow Frames

Description	CAT. #	Specs
 5" IC Shallow Frame with Driver	E5SQLFU11	16W, 1100 lm, 120/277V, Triac/ELV
	E5SQLFU20	28W, 2000 lm, 120/277V, 0-10V
 5" IC Shallow Frame with Driver and Emergency Battery Backup	E5SQLFU11EM1	1100 lm (Up to 750 lm Emergency Output)
	E5SQLFU11EM2	1100 lm (Up to 1100 lm Emergency Output)
	E5SQLFU20EM1	2000 lm (Up to 750 lm Emergency Output)
	E5SQLFU20EM2	2000 lm (Up to 1100 lm Emergency Output)

5" Maple™ LED Light Engines

Description	CAT. #	Specs
 5" LED Light Engine with Baffle Trim 	E524L1130W	White, 16W, 1100 lm, 3000K
	E524L1130B	Black, 16W, 1100 lm, 3000K
	E524L1130BZ	Bronze, 16W, 1100 lm, 3000K
	E524L1140B	Black, 16W, 1100 lm, 4000K
	E524L1140BZ	Bronze, 16W, 1100 lm, 4000K
	E524L2030W	White, 26W, 2000 lm, 3000K
	E524L2030B	Black, 26W, 2000 lm, 3000K
	E524L2030BZ	Bronze, 26W, 2000 lm, 3000K
	E524L2040W	White, 26W, 2000 lm, 4000K
	E524L2040B	Black, 26W, 2000 lm, 4000K
E524L2040BZ	Bronze, 26W, 2000 lm, 4000K	
 5" LED Light Engine with Reflector Trim 	E520L1130W	White, 16W, 1100 lm, 3000K
	E520L1130B	Black, 16W, 1100 lm, 3000K
	E520L1130BZ	Bronze, 16W, 1100 lm, 3000K
	E520L1140B	Black, 16W, 1100 lm, 4000K
	E520L2030W	White, 26W, 2000 lm, 3000K
	E520L2030B	Black, 26W, 2000 lm, 3000K
	E520L2030BZ	Bronze, 26W, 2000 lm, 3000K
	E520L2040W	White, 26W, 2000 lm, 4000K
	E520L2040B	Black, 26W, 2000 lm, 4000K
	E520L2040BZ	Bronze, 26W, 2000 lm, 4000K
 5" Adjustable Pull Down LED Light Engine 	E523L1130W	White, 16W, 1100 lm, 3000K
	E523L1130BZ	Bronze, 16W, 1100 lm, 3000K
	E523L1140W	White, 16W, 1100 lm, 4000K
	E523L1140BZ	Bronze, 16W, 1100 lm, 4000K
 5" Pull Down LED Light Engine 	E521L2030W	White, 26W, 2000 lm, 3000K
	E521L2040W	White, 26W, 2000 lm, 4000K

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



INTEGRATED LED	90+ CRI	WET LOCATION	IC RATED	AIRTIGHT
DIMMABLE	TITLE 24 COMPLIANT	50,000 HOURS	5 YEAR WARRANTY	ASSEMBLED IN U.S.A.



SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4" 6"	Round Square Adjustable Trimless	White Black Bronze Copper Nickel Haze	850 lm to 2000 lm	2700K - 4000K & Sunset Dimming





The Cedar™ System

High-End Residential & Light Commercial LED Lighting





TITLE 24 COMPLIANT DIMMABLE 50,000 HOURS ASSEMBLED IN U.S.A.

3" LED IC Airtight Housings with Driver

Description	Cat. #	Specs
 <p>3" New Construction LED ICA Housing with Driver Opening: 3 1/4" x 5 1/2" H</p> <p>IC RATED</p>	E3LC08ICA2	850 lm, 120V, Triac/ELV
	E3LC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LC08ICASD	850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY
 <p>3" New Construction LED ICA Double Wall Housing with Driver Opening: 3 1/4" x 5 1/2" H</p> <p>IC RATED</p>	E3LC10ICA2	1000 lm, 120V, Triac/ELV
	E3LC10ICAD2	1000 lm, 120/277V, 0-10V/Triac/ELV
	E3LC10ICASD	1000 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY
 <p>3" Remodel LED ICA Housing with Driver Opening: 3 1/4" x 5 1/2" H</p> <p>IC RATED</p>	E3LRC08ICA2	850 lm, 120V, Triac/ELV
	E3LRC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LRC08ICASD	850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY
 <p>3" New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 3 1/4" x 7 3/4" H</p> <p>FIRE RATED</p>	E3FH08ICA2	850 lm, 120V, Triac/ELV
	E3FH08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3FH08ICASD	850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY

3" LED Housings with Driver (Non-IC Airtight)

Description	Cat. #	Specs
 <p>3" New Construction LED Housing with Driver Opening: 3 1/4" x 5 1/2" H</p>	E3LC082	850 lm, 120V, Triac/ELV
	E3LC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LC08SD	850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY
	E3LC102	1000 lm, 120V, Triac/ELV
	E3LC10D2	1000 lm, 120/277V, 0-10V/Triac/ELV
	E3LC10SD	1000 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY
 <p>3" Remodel LED Housing with Driver Opening: 3 1/4" x 5 1/2" H</p>	E3LRC082	850 lm, 120V, Triac/ELV
	E3LRC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
	E3LRC08SD	850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY
	E3LRC102	1000 lm, 120V, Triac/ELV
	E3LRC10D2	1000 lm, 120/277V, 0-10V/Triac/ELV
	E3LRC10SD	1000 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



3" LED Light Engines

Round Reflector Round Baffle Square Pinhole Square Reflector Round Pinhole



E310C Series
Finishes:
W2, B2, BZ2, BB2, C2, H2




E314C Series
Finishes:
W2, B2, BZ2, BB2



E315C Series
Finishes:
W2, B2, C2, BZ2, BB2



E320C Series
Finishes:
W2, BZ2, BB2, C2, B2, H2



E329C Series
Finishes:
W2, B2, C2, BB2



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	Cedar™ 3" Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
	E310C	Round Reflector	08 850 lm	27 2700K	W All White	2 Gen 2
E314C	Round Baffle	10 1000 lm	30 3000K	B Black/Wht Trim		-F 38°
E315C	Square Pinhole		35 3500K	C Chrome/Wht Trim		-N 24°
E320C	Square Reflector		40 4000K	H Haze/Wht Trim		-S 15°
E329C	Round Pinhole		50 5000K	BZ All Bronze		
			SD Sunset	BB All Black		













Example: **E310C0827W2** [ELCO Cedar™ 3" Light Engine, 850 lm, 2700K, All White, Gen 2, 60° lens]

The Cedar™ System




High-End Residential & Light Commercial LED Lighting



4" LED IC Airtight Housings with Driver

Description	Cat. #	Specs		
 <p>4" New Construction LED ICA Housing with Driver Opening: 4 1/4" x 5 1/2" H</p>	 IC RATED	E4LC08ICA2 850 lm, 120V, Triac/ELV E4LC08ICAD2 850 lm, 120/277V, 0-10V/Triac/ELV E4LC08ICASD 850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV		
	 <p>4" New Construction LED ICA Double Wall Housing with Driver Opening: 4 1/4" x 5 1/2" H</p>	 IC RATED	E4LC12ICA2 1250 lm, 120V, Triac/ELV E4LC12ICAD2 1250 lm, 120/277V, 0-10V/Triac/ELV E4LC12ICASD 1250 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV	
		 <p>4" New Construction LED ICA Double Wall Housing with Driver Opening: 4 1/4" x 7 1/4" H</p>	 IC RATED	E4LC16ICA2 1600 lm, 120V, Triac/ELV E4LC16ICAD2 1600 lm, 120/277V, 0-10V/Triac/ELV E4LC16ICASD 1600 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV
 <p>4" Remodel LED ICA Housing with Driver Opening: 4 1/4" x 5 1/2" H</p>	 IC RATED		E4LRC08ICA2 850 lm, 120V, Triac/ELV E4LRC08ICAD2 850 lm, 120/277V, 0-10V/Triac/ELV E4LRC08ICASD 850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV	
		 <p>4" New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 4 1/4" x 7 3/4" H</p>	 FIRE RATED	E4FH08ICA2 850 lm, 120V, Triac/ELV E4FH08ICAD2 850 lm, 120/277V, 0-10V/Triac/ELV E4FH08ICASD 850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV
			 <p>4" New Construction Foam Insulated R60 LED Housing Opening: 4 1/4" x 7 3/4" H</p>	 IC RATED

4" LED Housings with Driver (Non-IC Airtight)

Description	Cat. #	Specs
 <p>4" New Construction LED Housing with Driver Opening: 4 1/4" x 5 1/2" H</p>		E4LC082 850 lm, 120V, Triac/ELV
		E4LC08D2 850 lm, 120/277V, 0-10V/Triac/ELV
		E4LC08SD 850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV
		E4LC122 1250 lm, 120V, Triac/ELV
		E4LC12D2 1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LC12SD 1250 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV
 <p>4" New Construction LED Double Wall Housing with Driver Opening: 4 1/4" x 7 1/4" H</p>		E4LC162 1600 lm, 120V, Triac/ELV
		E4LC16D2 1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LC16SD 1600 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV
 <p>4" Remodel LED Housing with Driver Opening: 4 1/4" x 5 1/2" H</p>		E4LRC082 850 lm, 120V, Triac/ELV
		E4LRC08D2 850 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC08SD 850 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV
		E4LRC122 1250 lm, 120V, Triac/ELV
		E4LRC12D2 1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC12SD 1250 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV
		E4LRC162 1600 lm, 120V, Triac/ELV
		E4LRC16D2 1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LRC16SD 1600 lm, Sunset Dimming, DIMS TO WARM SUNSET DIMMING TECHNOLOGY 120/277V, 0-10V/Triac/ELV

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



4" LED Light Engines

Round Reflector Round Wall Wash Round Drop Glass Round Baffle Round Adjustable Round Pinhole



E410C Series
Finishes: W2, B2, BZ2, BB2, C2, H2



E411C Series
Finishes: W2, B2, BZ2, BB2, C2, H2



E412C Series
Finishes: W2, B2, BZ2, BB2, C2, H2



E414C Series
Finishes: W2, B2, BZ2, BB2



E418C Series
Finishes: W2, BZ2, BB2



E429C Series
Finishes: W2, B2, C2

Square on Square Baffle Square on Square Reflector Square on Round Reflector Square on Round Baffle Square Adjustable



E415C Series
Finishes: W2, BZ2, B2



E417C Series
Finishes: W2



E420C Series
Finishes: W2, B2, BZ2, BB2, C2, H2, MW2, MB2



E424C Series
Finishes: W2, B2, BZ2, BB2



E428C Series
Finishes: W2, BZ2, BB2, C2



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number	Cedar™ 4" Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
E410C	Round Reflector	08 850 lm	27 2700K	W All White	2 Gen 2	60°
E411C	Round Wall Wash	12 1250 lm	30 3000K	B Black/Wht Trim		-F 38°
E412C	Round Drop Glass	16 1600 lm	35 3500K	C Chrome/Wht Trim		-N 24°
E414C	Round Baffle		40 4000K	H Haze/Wht Trim		-S 15°
E418C	Round Adjustable		50 5000K	BZ All Bronze		
E429C	Round Pinhole		SD Sunset	BB All Black		
E415C	Square Baffle			MW Matte White		
E417C	Sq/Sq Reflector			MB Matte Black		
E420C	Sq/Round Reflector					
E424C	Sq/Round Baffle					
E428C	Square Adjustable					





Example: **E429C16SDW2** [ELCO Cedar™ 4" Round Pinhole Light Engine, 1600 lm, Sunset Dimming, All White, Gen 2, 60° lens]

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



4" Trimless LED IC Airtight Housings with Driver

Description	Cat. #	Specs
 <p>4" New Construction LED ICA Trimless Housing with Driver Opening: 4 1/4" x 5 1/2" H</p>	 <p>IC RATED</p>	E4TL08ICA2 850 lm, 120V, Triac/ELV
		E4TL08ICAD2 850 lm, 120/277V, 0-10V/Triac/ELV
		E4TL08ICASD 850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>
		E4TL12ICA2 1250 lm, 120V, Triac/ELV
		E4TL12ICAD2 1250 lm, 120/277V, 0-10V/Triac/ELV
		E4TL12ICASD 1250 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>
 <p>4" New Construction LED ICA Trimless Housing with Driver Opening: 4 1/4" x 7 1/4" H</p>	 <p>IC RATED</p>	E4TL16ICA2 1600 lm, 120V, Triac/ELV
		E4TL16ICAD2 1600 lm, 120/277V, 0-10V/Triac/ELV
		E4TL16ICASD 1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>

4" Trimless LED Light Engines

Round Trimless Reflector	Round Trimless Baffle	Square Trimless Reflector
 <p>E430C Series Finishes: W2, B2, BZ2 Spackle Frame Included</p>	 <p>E434C Series Finishes: W2, B2, BZ2 Spackle Frame Included</p>	 <p>E444C Series Finishes: W2, B2, BZ2 Spackle Frame Included</p>



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number	Cedar™ 4" Trimless	Lumen	Color Temp	Finish	Generation	Beam Angle
E430C	Round Reflector	08 850 lm	27 2700K	W All White	2 Gen 2	60°
E434C	Round Baffle	12 1250 lm*	30 3000K	B All Black		-F 38°
E444C	Square Reflector	16 1600 lm*	35 3500K	BZ All Bronze		-N 24°
			40 4000K			-S 15°
			50 5000K			
			SD Sunset			

Example: **E430C0830W2** [ELCO Cedar™ 4" Round Reflector, 850 lm, 3000K, All White, Gen 2, 60° lens]









* Round Light Engines only

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



6" LED IC Airtight Housings with Driver



Description	Cat. #	Specs
 <p>6" New Construction LED ICA Housing with Driver Opening: 6 1/4" x 7 1/4" H</p> 	E6LC08ICA2	850 lm, 120V, Triac/ELV
	E6LC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E6LC08ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LC12ICA2	1200 lm, 120V, Triac/ELV
	E6LC12ICAD2	1200 lm, 120/277V, 0-10V/Triac/ELV
	E6LC12ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 <p>6" New Construction LED ICA Double Wall Housing with Driver Opening: 6 1/4" x 7 1/2" H</p> 	E6LC16ICA2	1600 lm, 120V, Triac/ELV
	E6LC16ICAD2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E6LC16ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LC20ICA2	2000 lm, 120V, Triac/ELV
	E6LC20ICAD2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E6LC20ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 <p>6" Remodel LED ICA Housing with Driver Opening: 6 1/4" x 7 1/4" H</p> 	E6LRC08ICA2	850 lm, 120V, Triac/ELV
	E6LRC08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC08ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6LRC12ICA2	1200 lm, 120V, Triac/ELV
	E6LRC12ICAD2	1200 lm, 120/277V, 0-10V/Triac/ELV
	E6LRC12ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
 <p>6" New Construction LED Housing with Driver 2-Hour Fire Rated Opening: 6 1/4" x 7 3/4" H</p> 	E6FH08ICA2	850 lm, 120V, Triac/ELV
	E6FH08ICAD2	850 lm, 120/277V, 0-10V/Triac/ELV
	E6FH08ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
	E6FH12ICA2	1200 lm, 120V, Triac/ELV
	E6FH12ICAD2	1200 lm, 120/277V, 0-10V/Triac/ELV
	E6FH12ICASD DIMS TO WARM <small>SUNSET DIMMING TECHNOLOGY</small>	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



6" LED Housings with Driver (Non-IC Airtight)


Description	Cat. #	Specs	
 <p>6" New Construction LED Housing with Driver Opening: 6 1/4" x 7 1/4" H</p>	E6LC082	850 lm, 120V, Triac/ELV	
	E6LC08D2	850 lm, 120/277V, 0-10V/Triac/ELV	
	E6LC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV	
	E6LC122	1200 lm, 120V, Triac/ELV	
	E6LC12D2	1200 lm, 120/277V, 0-10V/Triac/ELV	
	E6LC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV	
	E6LC162	1600 lm, 120V, Triac/ELV	
	E6LC16D2	1600 lm, 120/277V, 0-10V/Triac/ELV	
	E6LC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV	
	E6LC202	2000 lm, 120V, Triac/ELV	
	E6LC20D2	2000 lm, 120/277V, 0-10V/Triac/ELV	
	E6LC20SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV	
	 <p>6" Remodel LED Housing with Driver Opening: 6 1/4" x 7 1/4" H</p>	E6LRC082	850 lm, 120V, Triac/ELV
		E6LRC08D2	850 lm, 120/277V, 0-10V/Triac/ELV
		E6LRC08SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	850 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV
		E6LRC122	1200 lm, 120V, Triac/ELV
E6LRC12D2		1200 lm, 120/277V, 0-10V/Triac/ELV	
E6LRC12SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY		1200 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV	
E6LRC162		1600 lm, 120V, Triac/ELV	
E6LRC16D2		1600 lm, 120/277V, 0-10V/Triac/ELV	
E6LRC16SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY		1600 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV	
E6LRC202		2000 lm, 120V, Triac/ELV	
E6LRC20D2	2000 lm, 120/277V, 0-10V/Triac/ELV		
E6LRC20SD DIMS TO WARM SUNSET DIMMING TECHNOLOGY	2000 lm, Sunset Dimming, 120/277V, 0-10V/Triac/ELV		

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



6" LED Light Engines

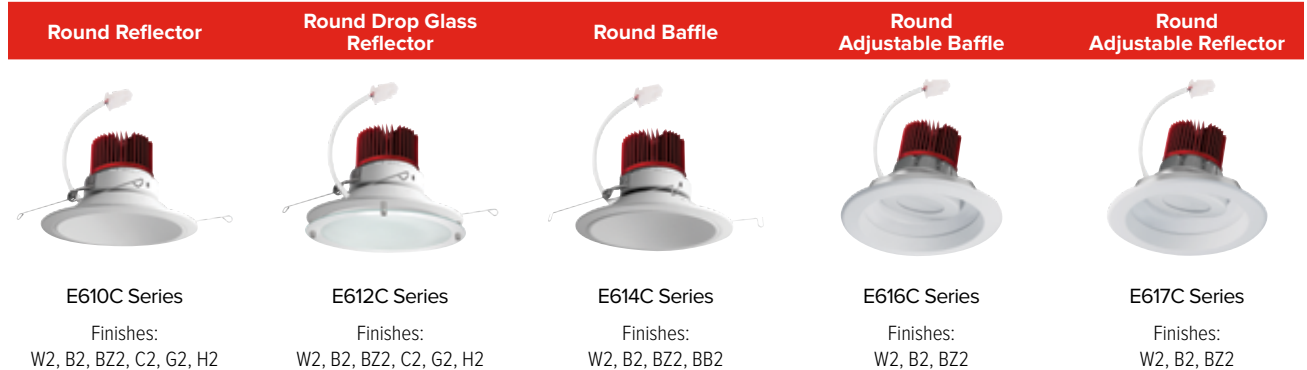

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY

*All Sunset LED Light Engines must be used with "SD" Housings

	Cedar™ 6" Light Engine	Lumen	Color Temp	Finish	Generation	Beam Angle
Product Number	E610C Round Reflector	08 850 lm	27 2700K	W All White	2 Gen 2	60°
Builder	E612C Round Drop Glass	12 1250 lm	30 3000K	B Black/Wht Trim		-F 38°
	E614C Round Baffle	16 1600 lm	35 3500K	C Chrome/Wht Trim		-N 24°
	E616C Round Adj. Baffle	20 2000 lm	40 4000K	G Gold/Wht Trim		-S 15°
	E617C Round Adj. Ref.		50 5000K	H Haze/Wht Trim		
			SD Sunset	BZ All Bronze		

Example: **E614C2040BZ2** [ELCO Cedar™ 6" Round Baffle Light Engine, 2000 lm, 4000K, All Bronze, Gen 2, 60° lens]

The Cedar™ System

High-End Residential & Light Commercial LED Lighting



TITLE 24 COMPLIANT DIMMABLE 50,000 HOURS ASSEMBLED IN U.S.A.

4" Dedicated LED IC Airtight Housings

	Description		Cat. #	Specs
	4" New Construction LED ICA Housing Opening: 4" x 5 1/2" H		EL490ICA	14W MAX., 120/277V
			EL490ICA-7	Includes step-down transformer 277V to 12V
	4" Remodel LED ICA Housing Opening: 4" x 5 1/2" H		EL490RICA	14W MAX., 120/277V

4" LED Module & Driver

Round Reflector	Round Wall Wash	Round Drop Glass	Round Baffle	Round Adjustable
E410R Series Finishes: W, B, BZ, BB, C, H, MW, MB	E411R Series Finishes: W, B, BZ, BB, C, H, MW, MB	E412R Series Finishes: W, B, BZ, BB, C, H, MW, MB	E414R Series Finishes: W, B, BZ, BB	E418R Series Finishes: W, BZ, BB, C
Square on Square Baffle	Square on Square Reflector	Square on Round Reflector	Square on Round Baffle	Square Adjustable
E415R Series Finishes: W, BZ	E417R Series Finishes: W, BZ	E420R Series Finishes: W, BZ, BB, C, H, MW, MB	E424R Series Finishes: W, BZ, BB, C, H, MW, MB	E428R Series Finishes: W, BZ, BB, C



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	4" LED Module & Driver	Lumen	Color Temp	Finish	Beam Angle
E410R	Round Reflector	08 850 lm	27 2700K	W All White	60°
E411R	Round Wall Wash		30 3000K	B Black/Wht Trim	-F 38°
E412R	Round Drop Glass		35 3500K	C Chrome/Wht Trim	-N 24°
E414R	Round Baffle		40 4000K	H Haze/Wht Trim	-S 15°
E418R	Round Adjustable		50 5000K	BZ All Bronze	
E415R	Sq/Sq Baffle		SD Sunset	BB All Black	
E417R	Sq/Sq Reflector			MW Matte White	
E420R	Sq/Round Reflector			MB Matte Black	
E424R	Sq/Round Baffle				
E428R	Square Adjustable				







Example: **E411R0827W-F** [ELCO 4" Round Wall Wash LED Module with Driver, 850 lm, 2700K, All White, 38° lens]

The Cedar™ System






High-End Residential & Light Commercial LED Lighting



6" Dedicated LED IC Airtight Housings

Description	Cat. #	Specs
 <p>6 New Construction LED ICA Housing 2-Hour Fire Rated Opening: 6 3/8" x 7 3/4" H</p> 	EL76FICA	22W MAX., 120/277V
	EL76FICA-7	Includes step-down transformer 277V to 120V
 <p>6" New Construction LED ICA Housing Opening: 6 1/4" x 7" H</p> 	EL770ICA	24W MAX., 120/277V
	EL770ICA-7	Includes step-down transformer 277V to 120V
 <p>6" Remodel LED ICA Housing Opening: 6 1/2" x 7" H</p> 	EL770RICA	24W MAX., 120/277V
	EL770RICA-7	Includes step-down transformer 277V to 120V

6" LED Module & Driver

Round Reflector	Round Drop Glass	Round Baffle	Round Adjustable Baffle	Round Adjustable Reflector
 <p>E610R Series Finishes: W, B, C, G, H, BZ</p>	 <p>E612R Series Finishes: W, B, C, G, H, BZ</p>	 <p>E614R Series Finishes: W, B, BZ</p>	 <p>E616R Series Finishes: W, B, BZ</p>	 <p>E617R Series Finishes: W, B, C, H, BZ</p>



*All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	6" LED Module & Driver	Lumen	Color Temp	Finish	Beam Angle
E610R	Round Reflector	08 850 lm	27 2700K	W All White	60°
E612R	Round Drop Glass	12 1250 lm	30 3000K	B Black/Wht Trim	-F 38°
E614R	Round Baffle		35 3500K	C Chrome/Wht Trim	-N 24°
E616R	Round Adj. Baffle		40 4000K	G Gold/Wht Trim	-S 15°
E617R	Round Adj. Reflector		50 5000K	H Haze/Wht Trim	
			SD Sunset	BZ All Bronze	

Example: **E610R1250H** [ELCO 6" Round Reflector LED Module with Driver, 1250 lm, 5000K, Haze/White Trim, 60° lens]

Commercial LED Lighting

THE PERFECT LIGHTING SOLUTION FOR HOSPITALITY, RETAIL & COMMERCIAL PROJECTS

Junction Box

Available in Architectural, Plaster, Remodel Frame, and Retrofit

Driver
3-in-1 Dimming 0-10V/Triac/ELV 120V/277V

Apertures ranging from 4" to 9"

Strong lumen output from 850 to 6000 lumens

IDEAL® Quick Connect

Heat Sink

LED Engine

Trims in a variety of Color Finishes





- INTEGRATED LED
- 90+ CRI
- WET LOCATION
- DIMMABLE
- 5 YEAR WARRANTY
- 50,000 HOURS
- ASSEMBLED IN U.S.A.

Battery Backup driver available upon request

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
4"	Reflector	White	<p>850 lm to 6000 lm</p>	<p>2700K - 5000K & Sunset Dimming</p>
6"	Wall Wash	Black		
8"	Drop Glass	Chrome		
9"	Adjustable	Haze		



4" Round LED Architectural Frames with Driver

	Description	Cat. #	Specs
	4" New Construction Architectural Frame with Driver Opening: 4 3/4" x 4 1/4" H	E4LHU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E4LHU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LHU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LHU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LHU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	4" New Construction Plaster Frame with Driver Opening: 4 7/8" x 3 1/2" H	E4LFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E4LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	4" Remodel Frame with Driver Opening: 4 7/8" x 6 1/2" H	E4LRU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E4LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	4" Retrofit Kit with Driver Height: 3 1/2" Width: 4 7/8" Depth: 3"	E4LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E4LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E4LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E4LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E4LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV

Product	ELCO 4" Round Frame	Voltage	Lumen	Dimming	Optional
Number	E4LH Architectural	U 120/277V	08 850 lm	D2 Triac/ELV/0-10V	EM1 Emergency Backup up to 700 lm output
Builder	E4LF Plaster		12 1250 lm	S Sunset	
	E4LR Remodel		16 1600 lm	L2 Lutron	EM2 Emergency Backup up to 1100 lm output
	E4LT Retrofit Kit		20 2000 lm 30 3000 lm		

Example: **E4LHU20D2** [ELCO 4" Architectural Frame, 120/277V, 2000 lm, Triac/ELV/0-10V Dimming]

4" Round LED Light Engines

Round Reflector	Round Wall Wash	Round Drop Glass
 <p>E410 Series Finishes: W2, B2, C2, H2, HW2</p>	 <p>E411 Series Finishes: W2, B2, C2, H2, HW2</p>	 <p>E412 Series Finishes: W2, B2, C2, H2, HW2</p>





*All Sunset LED Light Engines must be used with "SD" Housings

Product	ELCO 4" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Number	E410 Reflector	L	08 850 lm	27 2700K	H2 All Haze	60° (Standard)
Builder	E411 Wall Wash		12 1250 lm	30 3000K	W2 All White	-F 36°
	E412 Drop Glass		16 1600 lm	35 3500K	B2 All Black	-N 25°
			20 2000 lm 30 3000 lm	40 4000K 50 5000K SD Sunset	C2 All Chrome HW2 Haze/White Ring	-S 10°

Example: **E410L2030W2** [ELCO 4" Reflector, 2000 lm, 3000K, White Finish Trim]





4" Square LED Architectural Frames with Driver

Description	Cat. #	Specs
 <p>4" New Construction Architectural Frame with Driver Opening: 5 1/4" x 3 1/2" H</p>	E4SQLHU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E4SQLHU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLHU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
 <p>4" New Construction Plaster Frame with Driver Opening: 5 1/4" x 3 1/2" H</p>	E4SQLFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E4SQLFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E4SQLFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV

Product	ELCO 4" Square Frame	Voltage	Lumen	Dimming	Optional
Number	E4SQLH Architectural E4SQLF Plaster	U 120/277V	08 850 lm 12 1250 lm 16 1600 lm 20 2000 lm 30 3000 lm 40 4000 lm	D2 Triac/ELV/0-10V S Sunset L2 Lutron	EM1 Emergency Backup up to 700 lm output EM2 Emergency Backup up to 1100 lm output
Builder					

Example: **E4SQLHU08S** [ELCO 4" Square Architectural Frame, 120/277V, 850 lm, Sunset Dimming]

4" Square LED Light Engines





	Square Reflector	Square Wall Wash
	 <p>E440 Series Finishes: W2, H2</p>	 <p>E442 Series Finishes: W2, H2</p>
	<p>DIMS TO WARM SUNSET DIMMING TECHNOLOGY</p> <p>*All Sunset LED Light Engines must be used with "SD" Housings</p>	

Product	ELCO 4" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Number	E440 Reflector E442 Wall Wash	L	08 850 lm 12 1250 lm 16 1600 lm 20 2000 lm 30 3000 lm 40 4000 lm	27 2700K (Up to 3000 lm) 30 3000K 35 3500K 40 4000K 50 5000K SD Sunset	W2 All White H2 Haze/White Ring	60° (Standard) -F 36° -N 25° -S 10°
Builder						

Example: **E440L2030W2** [ELCO 4" Reflector, 2000 lm, 3000K, White Finish Trim]



6" Round LED Architectural Frames with Driver

Description		Cat. #	Specs
 <p>6" New Construction Architectural Frame with Driver Opening: 6 1/4" x 4 1/2" H</p>		E6LHU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LHU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LHU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 <p>6" New Construction Plaster Frame with Driver Opening: 6 1/4" x 3 1/2" H</p>		E6LFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LFU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 <p>6" Remodel Frame with Driver Opening: 6 1/4" x 7" H</p>		E6LRU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LRU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 <p>6" Retrofit Kit with Driver Height: 3 1/2" Width: 5" Depth: 3"</p>		E6LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
		E6LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
		E6LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

Product Number	ELCO 6" Round Frame	Voltage	Lumen	Dimming	Optional
Builder	E6LH Architectural E6LF Plaster E6LR Remodel E6LT Retrofit Kit	U 120/277V	08 850 lm 12 1250 lm 16 1600 lm 20 2000 lm 30 3000 lm 40 4000 lm 60 6000 lm	D2 Triac/ELV/0-10V S Sunset L2 Lutron	EM1 Emergency Backup up to 700 lm output EM2 Emergency Backup up to 1100 lm output

Example: **E6LHU20S** [ELCO 6" Architectural Frame, 120/277V, 2000 lm, Sunset Dimming]

The Laurel™ System

Architectural Commercial LED Lighting



6" Round LED Light Engines

Round Reflector	Round Wall Wash	Round Drop Glass	Round Adjustable
-----------------	-----------------	------------------	------------------



E610 Series
Finishes:
W2, B2, C2, H2, HW2



E611 Series
Finishes:
W2, B2, C2, H2, HW2



E612 Series
Finishes:
W2, B2, C2, H2, HW2



E618 Series
Finishes:
W2, B2, C2, H2, HW2

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY




*All Sunset LED Light Engines must be used with "SD" Housings

Product Number Builder	ELCO 6" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
		L				
E610 Reflector		08	850 lm	27 2700K (Up to 3000 lm)	H2 All Haze	60° (Standard)
E611 Wall Wash		12	1250 lm	30 3000K	W2 All White	-F 36°
E612 Drop Glass		16	1600 lm	35 3500K	B2 All Black	-N 25°
E618 Adjustable		20	2000 lm	40 4000K	C2 All Chrome	-S 10°
		30	3000 lm	50 5000K	HW2 Haze/White Ring	
		40	4000 lm	SD Sunset		
		60	6000 lm			

Example: **E610L2030W2** [ELCO 6" Reflector, 2000 lm, 3000K, White Finish Trim]



8" Round LED Architectural Frames with Driver

Description	Cat. #	Specs
 <p>8" New Construction Plaster Frame with Driver Opening: 8" x 3 1/2" H</p>	E8LFU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E8LFU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E8LFU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 <p>8" Remodel Frame with Driver Opening: 8" x 7" H</p>	E8LRU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E8LRU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E8LRU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 <p>8" Retrofit Kit with Driver Height: 3 1/2" Width: 5" Depth: 3"</p>	E8LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E8LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E8LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

Product	ELCO 8" Round Frame	Voltage	Lumen	Dimming	Optional
Number	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
Builder	E8LH Architectural E8LF Plaster E8LR Remodel E8LT Retrofit Kit	U 120/277V	08 850 lm 12 1250 lm 16 1600 lm 20 2000 lm 30 3000 lm 40 4000 lm 60 6000 lm	D2 Triac/ELV/0-10V S Sunset L2 Lutron	EM1 Emergency Backup up to 700 lm output EM2 Emergency Backup up to 1100 lm output

Example: **E8LRU40D2** [ELCO 8" Remodel Frame, 120/277V, 4000 lm, Triac/ELV/0-10V Dimming]

The Laurel™ System

Architectural Commercial LED Lighting



8" Round LED Light Engines

Round Reflector	Round Wall Wash	Round Drop Glass	Round Adjustable
-----------------	-----------------	------------------	------------------



E810 Series
Finishes:
W2, B2, C2, H2, HW2



E811 Series
Finishes:
W2, B2, C2, H2, HW2



E812 Series
Finishes:
W2, B2, C2, H2, HW2



E818 Series
Finishes:
W2, B2, C2, H2, HW2

DIMS TO WARM
SUNSET DIMMING TECHNOLOGY



*All Sunset LED Light Engines must be used with "SD" Housings

	ELCO 8" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Product		L				
Number	E810 Reflector	08	850 lm	27 2700K (Up to 3000 lm)	H2 All Haze	60° (Standard)
Builder	E811 Wall Wash	12	1250 lm	30 3000K	W2 All White	-F 36°
	E812 Drop Glass	16	1600 lm	35 3500K	B2 All Black	-N 25°
	E818 Adjustable	20	2000 lm	40 4000K	C2 All Chrome	-S 10°
		30	3000 lm	50 5000K	HW2 Haze/White Ring	
		40	4000 lm	SD Sunset		
		60	6000 lm			

Example: **E810L2030W2** [ELCO 8" Reflector, 2000 lm, 3000K, White Finish Trim]



9" Round LED Architectural Frames with Driver

Description	Cat. #	Specs
 <p>9" New Construction Architectural Frame with Driver Opening: 9" x 4 1/2" H</p>	E9LHU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E9LHU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E9LHU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E9LHU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E9LHU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E9LHU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E9LHU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV
 <p>9" Retrofit Kit with Driver Height: 3 1/2" Width: 5" Depth: 3"</p>	E9LTU08D2	850 lm, 120/277V, Triac/ELV/0-10V
	E9LTU12D2	1250 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU16D2	1600 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU20D2	2000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU30D2	3000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU40D2	4000 lm, 120/277V, 0-10V/Triac/ELV
	E9LTU60D2	6000 lm, 120/277V, 0-10V/Triac/ELV

Product	ELCO 9" Round Frame	Voltage	Lumen	Dimming	Optional
Number	E9LH Architectural E9LT Retrofit Kit	U 120/277V	08 850 lm 12 1250 lm 16 1600 lm 20 2000 lm 30 3000 lm 40 4000 lm 60 6000 lm	D2 Triac/ELV/0-10V S Sunset L2 Lutron	EM1 Emergency Backup up to 700 lm output EM2 Emergency Backup up to 1100 lm output
Builder					

Example: **E9LTU30D2** [ELCO 9" Retrofit Kit, 120/277V, 3000 lm, Triac/ELV/0-10V Dimming]

9" Round LED Light Engines

Square Reflector



E910 Series
Finishes:
W2, B2, C2, H2, HW2



*All Sunset LED Light Engines must be used with "SD" Housings

Product	ELCO 9" Engines	Lume	Lumen	Color Temp	Finish	Beam Angle
Number	E910 Reflector	L	08 850 lm 12 1250 lm 16 1600 lm 20 2000 lm 30 3000 lm 40 4000 lm 60 6000 lm	27 2700K (Up to 3000 lm) 30 3000K 35 3500K 40 4000K 50 5000K SD Sunset	H2 All Haze W2 All White B2 All Black C2 All Chrome HW2 Haze/White Ring	60° (Standard) -F 36° -N 25° -S 10°
Builder						
















Example: **E910L6050HW2** [ELCO 9" Reflector, 6000 lm, 5000K, Haze with White Ring]

The **Alpine™** System

Recessed **Housings & Trims**

FOR LED & NON-LED MR16 LAMPS (GU5.3, GU10, PSA37)








SIZES	STYLES	FINISHES		LAMPS
 3"  4"  6"	 Round Trims  Square Trims	 White  Black  Bronze  Nickel	 Haze  Copper  Gold	 GU5.3  GU10  PSA37

The Alpine™ System



MR16 Recessed fixtures





3" GU10 Housings

Description	CAT. #	Specs
 <p>3" New Construction IC Airtight Housing for GU10 LED</p>	EL39LDICA	12W MAX. 120V
	EL39LDICA-7	12W MAX. with 277V to 120V Step-Down Transformer
 <p>3" Remodel IC Airtight Housing for GU10 LED</p>	EL39LDRICA	12W MAX. 120V
 <p>3" Double Wall Shallow IC Housing for MAX. 50W GU10</p>	EL39ICA	50W MAX. 120V
 <p>3" New Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC</p>	EL39A	50W MAX. 120V
 <p>3" Remodel Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC</p>	EL39RA	50W MAX. 120V

3" Dedicated LED Housings

Description	CAT. #	Specs
 <p>3" LED New Construction IC Airtight Housing with Quick Connect terminal</p>	EL390ICA	14W MAX. 120V
	EL390ICA-7	14W MAX. with 277V to 120V Step-Down Transformer
 <p>3" LED Remodel IC Airtight Housing with Quick Connect terminal</p>	EL390RICA	14W MAX. 120V
 <p>LED MR16 with Quick Connect Lamp</p>	PSA37	7W, 3000K, 500 lm, 120V
	PSA37-27	7W, 2700K, 500 lm, 120V
	PSA37-35	7W, 3500K, 500 lm, 120V
	PSA37-40	7W, 4000K, 500 lm, 120V

3" Bi-Pin MR16 LED Lamp Housings




Description	CAT. #	Specs
 <p>3" Low Voltage Housing for LED MR16 Bi-Pin Lamp</p>	EL2699LDICA	12W MAX. Magnetic Transformer, 12V
	EL2699LDICEA	12W MAX. Electronic Transformer, 12V
 <p>3" Low Voltage IC Remodel Housing for LED MR16 Bi-Pin Lamp</p>	EL2699LDRICA	12W, Magnetic Transformer, 12V
	E2699LDRICEA	12W, Electronic Transformer, 12V

The Alpine™ System









MR16 Recessed fixtures



3" Low Voltage IC & Non IC Housings for MR16 Bi-Pin

Description	CAT. #	Specs
 <p>3" Low Voltage IC Housing for MR16 Bi-Pin Lamp</p>	EL2699ICA	50W MAX. 12V
	EL2699ICEA	50W MAX. Electronic Transformer
 <p>3" Low Voltage Airtight Housing for MR16 Bi-Pin Lamp. Non-IC</p>	EL2699A	50W MAX. Magnetic Transformer
	EL2699EA	50W MAX. Electronic Transformer
 <p>3" Low Voltage Airtight Remodel Housing for MR16 Bi-Pin Lamp. Non-IC</p>	EL2699RA	50W MAX.
	EL2699REA	50W MAX. Electronic Transformer

3" MR16 Trims









Description	CAT. #	Specs
 <p>3" Die-cast Round Lensed Shower Trim with Frosted Glass Lens</p> 	EL2612W	All White
 <p>3" Die-cast Round Clear Lensed Shower Trim</p> 	EL2613W	All White
 <p>3" Die-Cast Pinhole Trim with Reflector</p>	EL2619WB	Black w/White Ring, 2" Aperture
	EL2619WC	Chrome w/White Ring, 2" Aperture
	EL2619WW	All White, 2" Aperture
	EL2619BB	All Black, 2" Aperture
 <p>3" Die-cast Round Slot Aperture Trim</p>	EL2620W	White, 45° Adjustability
	EL2620B	Black, 45° Adjustability
 <p>3" Die-Cast Adjustable Reflector Trim</p>	EL2621W	All White, 25° Adjustability
	EL2621B	Black w/White Ring, 25° Adjustability
	EL2621BB	All Black, 25° Adjustability
	EL2621BZ	All Bronze, 25° Adjustability
	EL2621C	Chrome w/White Ring, 25° Adjustability
	EL2621CC	All Clear, 25° Adjustability
	EL2621CN	Chrome w/Nickel Ring, 25° Adjustability
	EL2621H	Haze w/White Ring, 25° Adjustability
 <p>3" Adjustable Wall Wash Reflector Trim</p>	EL2622W	All White, 45° Adj, Rotate 359°
	EL2622B	Black/White Ring, 45° Adj, Rotate 359°

The Alpine™ System

MR16 Recessed fixtures



3" MR16 Trims












Description	CAT. #	Specs
 3" Die-Cast Louvered Bottom Trim	EL2633W	All White
	EL2633B	All Black
 3" Cross Blade Reflector Trim	EL2644W	All White
	EL2644B	Black/White Ring
	EL2644C	Chrome/White Ring
	EL2644G	Gold/White Ring
 3" Die-Cast Glass Trim	EL2652BL	Blue/White Ring
 3" Die-Cast Accent Trim	EL2653BL	Blue/White Ring
 3" Die-Cast Adjustable Pull Down Trim	EL2688W	All White, 30° Adjustability, 358° Rotation
	EL2688B	All Black, 30° Adjustability, 358° Rotation
	EL2688BZ	All Bronze, 30° Adjustability, 358° Rotation
	EL2688N	All Nickel, 30° Adjustability, 358° Rotation
 3" Die-Cast Adjustable Baffle Trim	EL2693W	All White, 25° Adjustability
	EL2693B	Black/White Ring, 25° Adjustability
	EL2693BB	All Black, 25° Adjustability
	EL2693BZ	All Bronze, 25° Adjustability
	EL2693BN	Black/Nickel Ring, 25° Adjustability
 3" Adjustable Wall Wash Scoop with Baffle Trim	EL2695W	All White
	EL2695B	All Black
 3" Adjustable Pull Down Trim	EL2696W	All White, 0°-90° Tilt, 359° Rotation
 3" Die-cast Adjustable Eyeball Trim	EL2698WW	All White, 30° Tilt
 3" Die-cast Square Adjustable Reflector Trim	EL2321W	All White, 30° Adjustability
	EL2321C	Chrome/White Ring, 30° Adjustability
	EL2321BZ	All Bronze, 30° Adjustability

The Alpine™ System

MR16 Recessed fixtures



3" MR16 Trims



Description	CAT. #	Specs
 3" Square Phenolic Trim on Baffle Trim	EL2393W	All White
 3" Square Adjustable Pull Down Trim	EL2396W	All White, 87° Adjustability, 358° Rotation
 3" Die-Cast Lensed Shower Trims	EL2312W	White/Frosted Lens
	EL2313W	White/Clear Lens
 3" Die-Cast Adjustable Trim	EL2388W	All White, 30° Tilt
	EL2388B	All Black, 30° Tilt
	EL2388BZ	All Bronze, 30° Tilt
 3" Die-Cast Adjustable Slot Aperture Trim	EL2320W	White
	EL2320B	Black
 3" Die-Cast Adjustable Wall Wash Reflector Trim	EL2322W	All White, 45° Adjustability
	EL2322B	Black/White Ring, 45° Adjustability
 3" Die-Cast Adjustable Wall Wash Baffle Trim	EL2324BZ	All Bronze, 45° Adjustability, 30° Tilt
	EL2393W	All White
 3" Square on Round Baffle Trim	EL2393B	Black/White Ring
	EL2393BZ	All Bronze
	EL2393BB	All Black
	EL2393BN	Black/Nickel Ring
 3" Die-Cast Wall Wash Baffle Trim	EL2395W	All White
	EL2395B	Black/White Ring
 3" Die-Cast Reflector Trim with Square Pinhole	EL2382W	All White, 30° Tilt
	EL2382C	Chrome/White Ring, 30° Tilt
	EL2382BB	All Black, 30° Tilt
	EL2382BZ	All Bronze, 30° Tilt
 3" Die-Cast Baffle Trim with Square Pinhole	EL2384W	All White, 30° Tilt
	EL2384B	All Black, 30° Tilt
	EL2384BZ	All Bronze, 30° Tilt

The Alpine™ System



MR16 Recessed fixtures





4" GU10 Housings

Description	CAT. #	Specs
 <p>4" New Construction IC Airtight Housing with Thermal Protector</p>	EL49LDICA	12W MAX. 120V
	EL49LDICA-7	Step-down transformer 277V to 120V
 <p>4" New Construction Shallow IC Airtight Housing</p>	EL49LDICAS	12W MAX. 120V
 <p>4" Remodel IC Airtight Housing with Thermal Protector</p>	EL49LDRICA	12W MAX. 120V
 <p>4" Double Wall New Construction IC Housing with Thermal Protector for MAX. 50W GU10</p>	EL49ICA	50W MAX. 120V
 <p>4" New Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC</p>	EL49A	50W MAX. 120V
 <p>4" Remodel Construction Housing with Thermal Protector for MAX. 50W GU10. Non-IC</p>	EL49RA	50W MAX. 120V

4" Dedicated LED Housings for PSA37

Description	CAT. #	Specs
 <p>4" IC Airtight New Construction Housing with Quick Connect Terminal</p>	EL490ICA	120V
	EL490ICA-7	Step-down transformer 277V to 120V
	EL490ICA-EM5	Emergency Battery Back-Up
 <p>4" Remodel IC Airtight Housing with Quick Connect Terminal</p>	EL490RICA	

4" Bi-Pin MR16 LED Lamp Housings







Description	CAT. #	Specs
 <p>4" New Construction IC Housing for Bi-Pin G5.3 LED</p>	EL1499LDICA	12W MAX. Magnetic Transformer, 12V
	EL1499LDICAS	Shallow
	EL1499LDICEA	12W MAX. Electronic Transformer, 12V
	EL1499LDICEAS	Shallow
 <p>4" Remodel IC Housing for Bi-Pin G5.3 LED</p>	EL1499LDRICA	12W, Magnetic Transformer, 12V
	EL1499LDRICAS	Shallow
	E1499LDRICEA	12W, Electronic Transformer, 12V
	E1499LDRICEAS	Shallow

The Alpine™ System



MR16 Recessed fixtures



4" Low Voltage IC & Non IC Housings

Description	CAT. #	Specs
 <p>4" Low Voltage Airtight IC Housing</p>	EL1499ICA	50W MAX. 12V
	EL1499ICEA	50W MAX. Electronic Transformer
 <p>4" Low Voltage Airtight Housing for MR16 Bi-Pin Lamp. Non-IC</p>	EL1499A	50W MAX. Magnetic Transformer
	EL1499EA	50W MAX. Electronic Transformer
 <p>4" Low Voltage Remodel Housing for MR16 Bi-Pin Lamp. Non-IC</p>	EL1499RA	50W MAX. 120V Magnetic Transformer
	EL1499REA	50W MAX. 120V Electronic Transformer
 <p>4" Low Voltage Shallow Housing for MR16 Bi-Pin Lamp. Non-IC</p>	EL1499S	50W MAX. 120V Magnetic Transformer
	EL1499ES	50W MAX. Electronic Transformer
 <p>4" Low Voltage Shallow Remodel Housing for MR16 Bi-Pin Lamp. Non-IC</p>	EL1499RS	50W MAX. 120V Magnetic Transformer
	EL1499RES	50W MAX. Electronic Transformer
 <p>4" Double Wall New Construction ICA R-60 Foam Insulation Housing</p>	EL1499AJICEA	12W MAX. 12V Electronic Transformer

4" Low Voltage Housings for Remote Transformers











Description	CAT. #	Specs
 <p>4" Thermally Protected Housing for Remote Transformer</p>	E400	35W MAX. 12V
 <p>4" Thermally Protected Plater Frame Housing for Remote Transformer</p>	E450	35W MAX. 120V

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims











Description	CAT. #	Specs
 <p>4" Adjustable Shower Trim with Clear Reflector and Lens Trim</p> 	EL1411W	White, 25° Tilt
	EL1411B	Black, 25° Tilt
	EL1411N	Nickel, 25° Tilt
	EL1411BZ	Bronze, 25° Tilt
	EL1411SH	Lexan, 25° Tilt
 <p>4" Adjustable Shower Trim with Clear Reflector and Frosted Lens Trim</p>	EL1412W	White, 45° Adjustability
	EL1412B	White, 45° Adjustability
	EL1412N	White, 45° Adjustability
	EL1412BZ	Bronze, 45° Adjustability
	EL1412CP	Copper, 45° Adjustability
 <p>4" Adjustable Shower Trim with Clear Reflector and Frosted Glass Pinhole Trim</p>	EL1415W	White
	EL1415B	Black
	EL1415G	Gold
	EL1415N	Nickel
	EL1415BZ	Bronze
EL1415SH	Lexan	
 <p>4" Shower Trim with Round Drop Frosted Lens Trim</p>	EL1416W	White
 <p>4" Pinhole Aperture with Baffle Trim</p>	EL1419W	White
 <p>4" Adjustable Reflector Trim</p>	EL1421W	All White, 25° Tilt
	EL1421WN	White/Nickel Ring, 25° Tilt
	EL1421WBZ	White/Bronze Ring, 25° Tilt
	EL1421B	Black/White Ring, 25° Tilt
	EL1421BB	All Black, 25° Tilt
	EL1421BN	Black/Nickel Ring, 25° Tilt
	EL1421BZ	All Bronze, 25° Tilt
	EL1421C	Chrome/White Ring, 25° Tilt
	EL1421CN	Chrome/Nickel Ring, 25° Tilt
EL1421H	Haze/White Ring, 25° Tilt	
 <p>4" Adjustable Slot Spinnable Aperture Trim</p>	EL1421DC	Clear/White Die-Cast Ring, 25° Tilt
	EL1420W	White, 45° Tilt
	EL1420B	Black, 45° Tilt
	EL1420G	Gold, 45° Tilt
 <p>4" Adjustable Wall Wash Reflector Trim</p>	EL1420BZ	Bronze, 45° Tilt
	EL1422W	All White, 359° Rotation
 <p>4" Adjustable Pinhole with Baffle Trim</p>	EL1422B	All Black, 359° Rotation
	EL1423W	All White, 25° Tilt, 2" Aperture
	EL1423B	Black/White Ring, 25° Tilt, 2" Aperture
	EL1423BZ	All Bronze, 25° Tilt, 2" Aperture

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims













Description	CAT. #	Specs
 <p>4" Chrome Reflector Trim with Suspended Frosted Glass</p>	EL1426W	White Ring
	EL1426B	Black Ring
	EL1426G	Gold Ring
	EL1426N	Nickel Ring
	EL1426BZ	Bronze Ring
	EL1426CP	Copper Ring
 <p>4" Adjustable Pinhole with Reflector Trim</p>	EL1429W	All White, 25° Tilt
	EL1429B	Black/White Ring, 25° Tilt
	EL1429C	Chrome/White Ring, 25° Tilt
	EL1429BBZ	Black/Bronze Ring, 25° Tilt
 <p>4" Adjustable Slot Aperture One Piece Trim</p>	EL1430W	White, 25° Tilt
 <p>4" Gimbal Ring with Baffle Trim</p>	EL1433W	All White, 25° Tilt
	EL1433B	Black/White Ring, 25° Tilt
 <p>4" Reflector Cross Blade Trim</p>	EL1444C	Chrome/White Ring
 <p>4" Adjustable Reflector Wall Wash Trim</p>	EL1445W	All White, 45° Tilt
	EL1445B	Black/White Ring, 45° Tilt
	EL1445C	Chrome/White Ring, 45° Tilt
 <p>4" Frosted Glass Trim</p>	EL1452R	Red Glass/White Ring
 <p>4" Frosted Stepped Glass Trim</p>	EL1453BL	Blue Glass/White Ring
 <p>4" Die-Cast Adjustable Spot Trim</p>	EL1488W	All White, 0° - 30° Tilt
	EL1488B	All Black, 0° - 30° Tilt
	EL1488BZ	All Bronze, 0° - 30° Tilt
 <p>4" Adjustable Phenolic Step Baffle Trim</p>	EL1493W	All White, 25° Tilt
	EL1493B	Black/White Ring, 25° Tilt
	EL1493BB	All Black, 25° Tilt
	EL1493BZ	All Bronze, 25° Tilt
	EL1493BBZ	Black/Bronze Ring, 25° Tilt
	EL1493BCP	Black/Copper Ring, 25° Tilt
	EL1493BN	Black w/Nickel Ring, 25° Tilt
	EL1493WN	White w/Nickel Ring, 25° Tilt
	EL1493DW	All White Die-Cast Trim, 25° Tilt
	EL1493DB	Black/White Die-Cast Trim, 25° Tilt

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims














Description	CAT. #	Specs
 4" Square Baffle Trim	EL1491W	All White
	EL1491B	Black/White Ring
 4" Adjustable Wall Wash Baffle Trim	EL1495W	All White
	EL1495B	Black/White Ring
 4" Adjustable Pull Down Trim	EL1497W	All White, 0° - 90° Tilt, 359° Rotation
	EL1497B	All Black, 0° - 90° Tilt, 359° Rotation
	EL1497BZ	All Bronze, 0° - 90° Tilt, 359° Rotation
 4" Shower Trim with Clear Lens	EL2411W	Chrome/White Ring
 4" Shower Trim with Frosted Lens	EL2412W	White
	EL2412N	Nickel
	EL2412BZ	Bronze
 4" Shower Trim with Frosted Pinhole Lens	EL2415W	White
	EL2415N	Nickel
	EL2415BZ	Bronze
 4" Round Drop Lens Shower Trim	EL2416W	White
 4" Adjustable Slot Rotatable Aperture Trim	EL2420W	White
	EL2420B	Black
	EL2420BZ	Bronze
 4" Specular Reflector Trim	EL2421W	All White
	EL2421B	Black/White Ring
	EL2421C	Chrome/White Ring
	EL2421BZ	All Bronze
	EL2421WBZ	White/Bronze Ring
 4" Adjustable Wall Wash Baffle Trim	EL2424BZ	All Bronze, 25° Tilt
 4" Suspended Frosted Glass Trim	EL2426W	White
	EL2426B	Black
	EL2426N	Nickel
 4" Adjustable Pinhole with Reflector Trim	EL2429B	Chrome/Black Ring

The Alpine™ System

MR16 Recessed fixtures



4" MR16 Trims




Description	CAT. #	Specs
 4" Adjustable Gimbal with Baffle Trim	EL2440W	White, 25° Tilt
	EL2440B	Black, 25° Tilt
	EL2440BZ	Bronze, 25° Tilt
 4" Adjustable Gimbal Trim	EL2443W	White, 25° Tilt
	EL2443B	Black, 25° Tilt
 4" Adjustable Wall Wash Reflector Trim	EL2445W	All White, 25° Tilt
	EL2445B	Black/White Ring, 25° Tilt
	EL2445C	Chrome/White Ring, 25° Tilt
	EL2445G	Gold/White Ring, 25° Tilt
 4" Frosted Glass Square Trim	EL2452R	Red/White Ring
 4" Frosted Stepped Glass Trim	EL2453BL	Blue/White Ring
 4" Steel Construction Adjustable Reflector Trim	EL2482W	All White
	EL2482CN	Clear/Nickel Ring
 4" Die-Cast Aluminum Adjustable Baffle Trim	EL2484W	White
	EL2484B	Black
	EL2484BZ	Bronze
 4" Adjustable Pull Down with Snoot Trim	EL2487W	White, 85° Adjustability, 359° Rotation
	EL2487B	Black, 85° Adjustability, 359° Rotation
	EL2487BZ	Bronze, 85° Adjustability, 359° Rotation
 4" Die-Cast Adjustable with Square Trim	EL2488W	White, 0° - 30° Tilt
	EL2488B	Black, 0° - 30° Tilt
	EL2488BZ	Bronze, 0° - 30° Tilt
 4" Phenolic Baffle Trim	EL2493W	All White
	EL2493B	Black w/White Ring
	EL2493BB	All Black
	EL2493BZ	All Bronze
	EL2493BBZ	Black/Bronze Ring
 4" Phenolic Deep Baffle Trim	EL2494W	All White
 4" Wall Wash with Baffle Trim	EL2495W	All White
	EL2495B	Black/White Ring
 4" Pull Down Trim	EL2497W	White
	EL2497B	Black
	EL2497BZ	Bronze

The Alpine™ System








MR16 Recessed fixtures



6" Dedicated LED Housings

Description	CAT. #	Specs
 <p>6" Dedicated LED IC Airtight New Construction Housings with Quick Connect terminal</p>	EL770ICA	120V
	EL770ICA-7	Step-down transformer 277V to 120V
	EL760ICA	Shallow, 120V
	EL760ICA-7	Step-down transformer 277V to 120V
 <p>6" Dedicated LED IC Airtight Remodel Housings with Quick Connect terminal</p>	EL770RICA	120V
	EL760RICA	Shallow, 120V
 <p>LED MR16 with Quick Connect Lamp</p>	PSA37	7W, 3000K, 500 lm, 120V
	PSA37-27	7W, 2700K, 500 lm, 120V
	PSA37-35	7W, 3500K, 500 lm, 120V
	PSA37-40	7W, 4000K, 500 lm, 120V

6" Low Voltage IC & Non IC Housings & MR16 Trims




Description	CAT. #	Specs
 <p>6" Low Voltage Double Wall IC Airtight New Construction Housing</p>	EL7LVICA	50W MAX. 12V
 <p>6" Low Voltage New Construction Housing</p>	EL7LV	75W MAX. 12V
 <p>6" Low Voltage Remodel Housing</p>	EL7RLV	75W MAX. 12V
 <p>6" Adjustable Spot with Phenolic Baffle Trim</p>	EL2510W	All White
 <p>6" Adjustable Spot with Reflector Trim</p>	EL2511W	White
 <p>6" Adjustable Reflector Trim</p>	EL2516W	All White
	EL2516B	Black/White Ring
	EL2516C	Chrome/White Ring
	EL2516H	Haze/White Ring
	EL2516BZ	All Bronze
 <p>6" Adjustable Baffle Trim</p>	EL2530W	All White
	EL2530B	Black/White Ring
	EL2530BZ	All Bronze

The Alpine™ System







MR16 Recessed fixtures



6" MR16 Trims

Description	CAT. #	Specs
 6" Adjustable Slot Aperture Trim	EL2550W	White
	EL2550B	Black
 6" Pinhole with Baffle Trim	EL2579W	White
	EL2579B	Black
 6" Adjustable Pull Down Trim	EL2597W	White, 0° - 90° Tilt, 359° Rotation
	EL2597B	Black, 0° - 90° Tilt, 359° Rotation
	EL2597BZ	Bronze, 0° - 90° Tilt, 359° Rotation

6" Retrofit Trims (12V Magnetic Transformer Included)










Description	CAT. #	Specs
 6" Adjustable Spot with Phenolic Baffle Trim	EL1510W	All White
	EL1510B	Black/White Ring
 6" Adjustable Reflector Trim	EL1516W	All White
	EL1516B	Black/White Ring
	EL1516C	Chrome/White Ring
 6" Adjustable Baffle Trim	EL1530W	All White
	EL1530B	Black/White Ring
 6" Adjustable Slot Aperture Trim	EL1550W	White
 6" Baffle with Pinhole Trim	EL1579W	White
 6" Adjustable Pull Down Trim	EL1597W	White
	EL1597B	Black
	EL1597BZ	Bronze

Line Voltage





for LED & Non-LED PAR, R, A and GU24 Based Lamps



4" Line Voltage IC & Non IC Housings

Description	CAT. #	Specs
 4" IC Airtight Housing with Adjustable Lamp Holder	EL99ICA	50W MAX. 120V
 4" IC Airtight Remodel Housing with Adjustable Lamp Holder	EL99RICA	50W MAX. 120V
 4" IC Airtight New Construction 2-Hour Fire Rated Housing	EL99FICA	35W MAX. 120V
 R-60 Foam Insulation 4" Medium Base IC Airtight New Construction Housing (Suitable for Chicago Plenum construction)	EL99AJICA	20W MAX. 120V
 4" E26 Base IC Airtight New Construction Housing	EL99LDICA	12W MAX. 120V For LED Lamps Only
 4" Housing with Adjustable Lamp Holder	EL99A	50W MAX. 120V
 4" Remodel Housing with Adjustable Lamp Holder	EL99RA	50W MAX. 120V
 4" Airtight IC Housing with GU24 Base Socket	EL99ICA-G24	18W MAX. 120V
 4" Airtight IC Remodel Housing with GU24 Base Socket	EL99RICA-G24	18W MAX. 120V

4" Line Voltage Trims











Description	CAT. #	Specs
 4" Airtight Smooth Cone Reflector Trim	EL901W	All White
	EL901C	All Black
 4" Airtight Baffle Cone Trim	EL902W	All White
	EL911W	White
 4" Shower Trim with Clear Lens	EL911B	Black
	EL911N	Nickel
	EL911BZ	Bronze
	EL911SH	Lexan Ring
	EL912W	All White
	EL912B	All Black
 4" Shower Trim with Frosted Lens	EL912BZ	All Bronze
	EL912CP	All Copper
	EL912N	All Nickel
	EL912SH	Lexan Ring

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




4" Line Voltage Trims










Description	CAT. #	Specs
 4" Shower Trim with Fresnel Lens	EL913W	White
	EL913B	Black
	EL913G	Gold
	EL913N	Nickel
	EL913BZ	Bronze
	EL913SH	Lexan Ring
 4" Shower Trim with Frosted Pinhole Glass	EL915W	White
	EL915B	Black
	EL915N	Nickel
	EL915BZ	Bronze
	EL915SH	Lexan Ring
 4" Shower Trim with Drop Opal Lens	EL916W	White
	EL916B	Black
	EL916N	Nickel
	EL916SH	Lexan Ring
 4" Wall Wash with Reflector Trim	EL925W	All White
	EL925C	Chrome/White Ring
	EL925G	Gold/White Ring
	EL925KW	All White with Bracket
	EL925KC	Chrome/White Ring with Bracket
 4" Chrome Reflector with Suspended Frosted Glass Trim	EL926W	White
	EL926B	Black
	EL926G	Gold
	EL926N	Nickel
	EL926BZ	Bronze
 4" Open Trim	EL930W	White
 4" Reflector with Adjustable Socket Holder Bracket	EL977W	All White
	EL977B	Black/White Ring
	EL977C	Chrome/White Ring
	EL977G	Gold/White Ring
 4" Adjustable Gimbal Ring Trim	EL985W	White
	EL985B	Black
	EL985BZ	Bronze
 4" Adjustable Spot Trim (Not for use in IC Housings)	EL988W	White
	EL988B	Black
 4" Pinhole Trim	EL990W	White
	EL990BB	Black
	EL990BZ	Bronze

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




4" Line Voltage Trims










Description	CAT. #	Specs
 4" Baffle Trim	EL991W	All White
	EL991B	Black/White Ring
 4" Wall Wash Baffle Trim	EL992W	All White
	EL992B	Black/White Ring
	EL992KW	All White with Bracket
 4" Phenolic Step Baffle Trim	EL993W	All White
	EL993B	Black/White Ring
	EL993N	All Nickel
	EL993BB	All Black
	EL993BZ	All Bronze
	EL993BN	Black/Nickel Ring
	EL993NB	Nickel/Black Ring
	EL993WN	White/Nickel Ring
	EL993NW	Nickel/White Ring
	EL993BBZ	Black/Bronze Ring
	EL993BZW	Bronze/White Ring
	EL993WBZ	White/Bronze Ring
	EL993MW	All Metal White
	EL993MB	Black/White Metal Ring
 4" Baffle Trim with Lampholder Bracket	EL993KW	All White
	EL993KB	Black/White Ring
	EL993KN	All Nickel
	EL993KCP	All Copper
	EL993KBZ	All Bronze
	EL993KBN	Black/Nickel Ring
	EL993KNB	Nickel/Black Ring
EL993KNW	Nickel/White Ring	
 4" Stepped Phenolic Baffle Trim	EL994W	All White
	EL994BB	All Black
 4" Stepped Phenolic Deep Baffle Trim	EL994DW	All White
 4" Baffle Trim with Socket Bracket	EL995W	All White
	EL995B	Black/White Ring
	EL995N	All Nickel
	EL995BZ	All Bronze
 4" Eyebal Trim	EL998W	White
	EL998B	Black
	EL998C	Clear
 4" Reflector Trim with Socket Bracket	EL999KW	All White
	EL999KC	Chrome/White Ring
	EL999KG	Gold/White Ring
	EL999CBZ	Chrome/Bronze Ring

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




4" Line Voltage Trims















Description	CAT. #	Specs
 4" Reflector Trim	EL999W	All White
	EL999B	Black/White Ring
	EL999BB	All Black
	EL999BZ	All Bronze
	EL999C	Clear/White Ring
	EL999G	Gold/White Ring
	EL999H	Haze/White Ring
	EL999GG	All Gold
	EL999CN	Chrome/Nickel Ring
	EL999DC	Clear/White Diecast RIng
 4" Shower Reflector Trim with Clear Lens	EL9111W	White
	EL9111B	Black
	EL9111SH	Lexan RIng
 4" Shower Reflector Trim with Frosted Lens	EL9112W	White
	EL9112B	Black
	EL9112G	Gold
	EL9112N	Nickel
	EL9112BZ	Bronze
 4" Shower Reflector Trim with Fresnel Lens	EL9113W	White
	EL9113BZ	Bronze
	EL9113SH	Lexan RIng
 4" Shower Reflector Trim with Frosted Pinhole Glass	EL9115W	White
	EL9115N	Nickel
	EL9115BZ	Bronze
	EL9115SH	Lexan RIng
 4" Shower Reflector Trim with Drop Opal Lens	EL9116W	White
	EL9116BZ	Bronze
 4" Shower Trim with Frosted Lens	EL2912W	White
	EL2912N	Nickel
	EL2912BZ	Bronze
 4" Shower Trim with Frosted Pinhole Glass	EL2915W	White
	EL2915N	Nickel
	EL2915BZ	Bronze
 4" Phenolic Baffle Trim	EL2993W	All White
	EL2993B	Black/White Ring
	EL2993BB	All Black
	EL2993BZ	All Bronze
	EL2993BBZ	Black/Bronze Ring

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



4" Line Voltage Trims







Description	CAT. #	Specs
 4" Deep Phenolic Baffle Trim	EL2994W	All White
	EL2994B	Black/White Ring
 4" Reflector Trim	EL2999W	All White
	EL2999B	Black/White Ring
	EL2999C	Clear/White Ring
	EL2999BZ	All Bronze
	EL2999KW	All White, with Socket Bracket
 4" Metal Reflector Trim	EL2982W	All White
 4" Metal Baffle Trim	EL2983W	All White
 4" Diecast Baffle Trim	EL2984W	All White
	EL2984B	All Black
	EL2984BZ	All Bronze
 4" Gimbal Trim	EL2985W	All White
	EL2985BZ	All Bronze
 4" Die-cast Reflector Trim for PAR Lamps	ELL4810W	All White
	ELL4810B	All Black
	ELL4810BZ	All Bronze
 4" Die-cast Lensed Reflector Trim for PAR Lamps	ELL4812W	All White
	ELL4812BZ	All Bronze
 4" Die-cast Baffle Trim for PAR Lamps	ELL4813W	All White
	ELL4813BZ	All Bronze
 4" Die-cast Wall Wash Trim for PAR Lamps	ELL4815W	All White
	ELL4815BZ	All Bronze
 4" Die-cast Deep Reflector Trim for PAR Lamps	ELL4817W	All White
	ELL4817BZ	All Bronze
 4" Die-cast Deep Baffle Trim for PAR Lamps	ELL4819W	All White
 4" Die-cast Reflector Trim for PAR Lamps	ELL4814W	All White
	ELL4814B	All Black
	ELL4814BZ	All Bronze
 4" Die-cast Baffle Trim for PAR Lamps	ELL4816W	All White

Line Voltage



for LED & Non-LED PAR, R, A and GU24 Based Lamps



5" Line Voltage IC & Non IC Housings


Description	CAT. #	Specs
 <p>5" Aluminum IC Airtight New Construction Housing</p>	EL5ICA	75W MAX. 120V with Socket Bracket
	EL5ICANB	75W MAX. 120V, Housing without socket holder bracket.
 <p>5" Aluminum IC Airtight Remodel Housing</p>	EL5RICA	75W MAX. 120V, Includes gasket. Medium Base (E26),
 <p>5" IC Airtight New Construction 2-Hour Fire Rated Housing</p>	EL5FICA	75W MAX. 120V, Medium Base (E26)
 <p>5" Shallow Aluminum IC Airtight New Construction Housing</p>	EL55ICA	75W, 120V, Includes gasket. Medium Base (E26)
 <p>5" Shallow Aluminum IC Airtight Remodel Housing</p>	EL55RICA	75W, 120V, Includes gasket. Medium Base (E26)
 <p>5" IC Airtight New Construction Housing with GU24 Base Socket</p>	EL5ICA-G24	27W MAX. 120V, GU24 Base

5" Line Voltage Trims














Description	CAT. #	Specs
 <p>5" Metal Splay Baffle with White Trim Ring</p>	EL511W	All White
	EL511B	Black/White Ring
 <p>5" Shower Trim with Albalite Lens</p>	EL512W	All White
	EL512B	All Black
	EL512BZ	All Bronze
	EL512CP	All Copper
	EL512SH	Lexan Ring
	EL512KSH	Lexan Ring, Socket Bracket

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




5" Line Voltage Trims












Description	CAT. #	Specs
 5" Shower Trim with Fresnel Lens	EL513W	White
	EL513BZ	Bronze
	EL513CP	Copper
	EL513SH	Lexan Ring
	EL513KW	White, Socket Bracket
	EL513KBZ	Bronze, Socket Bracket
 5" Shower Trim with Diffused Dome Lens	EL514W	White
	EL514SH	Lexan Ring
 5" Eyeball with Baffle Trim	EL515W	Black/White Ring
	EL515WW	All White
 5" Shower Trim with Drop Opal Lens	EL516W	White
	EL516BZ	Bronze
	EL516SH	Lexan Ring
 5" Adjustable Gimbal Ring	EL517W	All White
	EL517B	All Black
 5" Eyeball with Trim Ring	EL518W	White
	EL518BZ	Bronze
	EL518CP	Copper
 5" Regressed Eyeball with Reflector Trim	EL519WW	All White
 5" Shower Trim with Frosted Lens	EL522W	White
	EL522BZ	Bronze
	EL522SH	Lexan Ring
	EL522KSH	Lexan Ring, Socket Bracket
 5" Open Trim	EL530W	White
	EL530CP	Copper
	EL530KW	White with Socket Bracket
	EL530KCP	Cooper with Socket Bracket
 5" Baffle Trim with Regressed Albalite Lens	EL542W	White
	EL542B	Black/White Ring
 5" Baffle Trim with Regressed Drop Opal Lens	EL546W	All White
	EL546B	Black/White Ring
 5" Adjustable Gimbal Ring with Baffle Trim	EL576W	All White
 5" Baffle Trim	ELA501W	All White

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



5" Line Voltage Trims

Description	CAT. #	Specs
 5" Reflector Trim	ELA599H	Haze/White Ring
 5" Reflector with Socket Bracket Trim	ELA5099W	All White
	ELA5099B	Black/White Ring
 5" Airtight Metal Cone Baffle Trim	ELM500W	All White
	ELM500B	All Black
 5" Airtight Metal Smooth Cone Reflector Trim	ELM501W	All White
	ELM501B	All Black
 5" Wall Wash Baffle Trim with Socket Bracket	ELM5045W	White
	ELM5045B	Black
 5" Metal Stepped Baffle with Coil Springs Trim	ELM530W	All White
	ELM530B	Black/White Ring
	ELM530BG	Black/Gold Ring
	ELM530BOV	Black/White Oversized Ring
	ELM530WOV	All White Oversized Ring
 5" Metal Stepped Baffle with Socket Bracket and Torsion Springs Trims	ELM530KW	All White
	ELM530KB	Black/White Ring
	ELM530KBZ	All Bronze
	ELM530KBCP	Black/Copper Ring
 5" Reflector Trim	ELS520W	All White
	ELS520B	Black/White Ring
	ELS520G	Gold/White Ring
 5" Reflector with Coil Springs Trim	ELS530W	All White
	ELS530BZ	Bronze/White Ring
 5" Reflector with Torsion Springs & Lampholder Bracket	ELS530KW	All White
	ELS530KBZ	All Bronze
 5" Reflector Cone Trim with Socket Bracket	ELS5030W	All White

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




6" Line Voltage IC & Non IC Housings









Description	CAT. #	Specs
 <p>6" IC Airtight New Construction Housing</p>	EL7ICA	90W, 120V, with Socket Bracket. Medium Base (E26)
	EL7ICANB	90W, 120V, Housing without socket holder bracket. Medium Base (E26)
 <p>6" IC Airtight New Construction 2-Hour Fire Rated Housing</p>	EL7FICA	90W, 120V, Medium Base (E26)
 <p>6" Double Wall IC Airtight New Construction Housing</p>	EL7IC100A	100W MAX. 120V, Medium Base (E26)
 <p>6" IC Airtight Remodel Housing</p>	EL7RICA	90W MAX. 120V, Includes gasket. Medium Base (E26)
 <p>6" Shallow IC Airtight New Construction Housing</p>	R9ICA	75W MAX. 120V, Includes gasket. Medium Base (E26)
 <p>6" Shallow IC Airtight Remodel Housing</p>	RR9ICA	75W MAX. 120V, Includes gasket. Medium Base (E26)
 <p>6" IC Airtight New Construction Housing with GU24 Base Socket</p>	EL7ICA-G24	27W MAX. 120V, Medium Base (E26)
 <p>6" Universal New Construction Housing</p>	R10H	150W MAX. 120V, Medium Base (E26)
 <p>6" Universal Remodel Housing</p>	RR10H	150W MAX. 120V, Medium Base (E26)
 <p>6" Shallow New Construction Housing</p>	R9H	75W MAX. 120V Medium Base (E26)
 <p>6" Shallow Remodel Housing</p>	RR9H	75W MAX. 120V Medium Base (E26)

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




6" Line Voltage Trims












Description	CAT. #	Specs
 6" Shower Trim with Albalite Lens	EL12W	White
	EL12B	Black
	EL12N	Nickel
	EL12BZ	Bronze
	EL12SH	Lexan Ring
	EL12KW	White with Bracket
	EL12KSH	Lexan Ring with Bracket
 6" Shower Trim with Fresnel Lens	EL13W	White
	EL13B	Black
	EL13N	Nickel
	EL13BZ	Bronze
	EL13SH	Lexan Ring
	EL13KW	White with Bracket
	EL13KSH	Lexan Ring with Bracket
 6" Shower Trim with Drop Opal Lens	EL16W	White
	EL16BZ	Bronze
	EL16SH	Lexan Ring
	EL16KSH	Lexan Ring with Bracket
 6" Eyeball with Baffle Trim	EL17W	White
	EL17B	Black/White Ring
 6" Eyeball Trim	EL18W	White
	EL18B	Black
	EL18BZ	Bronze
 6" Shower Trim with Clear Lens	EL19W	White
	EL19B	Black
	EL19SH	Lexan Ring
 6" Shower Reflector Trim with Diffused Dome Lens	EL114SH	Lexan Ring
 6" Open Trim with Coil Springs	EL30W	All White, 75W
	EL30BZ	All Bronze, 75W
	EL40W	All White, 150W
	EL40BZ	All Bronze, 150W
	EL40C	All Clear, 150W
	EL40CP	All Copper, 150W
 6" Open Trim with Socket Bracket	EL300W	All White
	EL304W	All White
 6" Wide Flange Baffle Trim	EL304W	All White
	EL304W	Black/White Ring
 6" Open Splay Trim	EL308W	White, 75W MAX.

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




6" Line Voltage Trims

Description	CAT. #	Specs
 6" Gimbal Ring Trim	EL317W	White, 50W-75W MAX. Includes PSA27
	EL317BZ	Bronze, 50W-75W MAX. Includes PSA27
 6" Gimbal Ring Trim	EL318W	All White, 90W-150W MAX.
	EL318N	All Nickel, 90W-150W MAX.
 6" Acrylic Drop Lens Trim	EL319W	White
 6" Adjustable Gimbal with Baffle Trim	EL376W	White, 35° Tilt, 360° Rotation
	EL376B	Black/White Ring, 35° Tilt, 360° Rotation
	EL376BZ	Bronze, 35° Tilt, 360° Rotation
 6" Adjustable Gimbal with Reflector Trim	EL377W	All White, 35° Tilt, 360° Rotation
	EL377B	Black/White Ring, 35° Tilt, 360° Rotation
	EL377C	Clear/White Ring, 35° Tilt, 360° Rotation
	EL377G	Gold/White Ring, 35° Tilt, 360° Rotation
 6" Regressed Eyeball with Reflector Trim	EL419WW	All White
	EL419BW	Black/White Ring
	EL419CW	Clear/White Ring
	EL419BB	All Black
 6" Adjustable Baffle Trim with Gimbal	EL476W	All White, 35° Tilt, 360° Rotation
	EL476B	Black/White Ring, 35° Tilt, 360° Rotation
	EL476BZ	Bronze, 35° Tilt, 360° Rotation
 6" Adjustable Gimbal with Baffle Trim	EL477W	All White
	EL477B	Black/White Ring
	EL477C	Clear/White Ring
	EL477G	Gold/White Ring
 6" Reflector Wall Wash Trim	ELA95SW	All White
	ELA95SB	Black/White Ring
	ELA95SC	Clear/White Ring
 6" Specular Cone Reflector Trim	ELA99SW	All White
	ELA99SB	Black/White Ring
	ELA99SC	Clear/White Ring
	ELA99SG	Gold/White Ring
 6" Reflector Baffle Trim	ELA101W	All White
	ELA101B	Black/White Ring
	ELA101BZ	Bronze
	ELA101WA	All White, Metal Baffle

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps




6" Line Voltage Trims











Description	CAT. #	Specs
 6" Baffle with Reflector Wall Wash Trim	ELA105W	All White
	ELA105B	Black/White Ring
 6" Metal Step Baffle Trim	ELM30W	All White, 75W
	ELM30B	Black/White Ring, 75W
	ELM30BZ	All Bronze, 75W
	ELM30N	All Nickel, 75W
	ELM30BB	All Black, 75W
	ELM30BBZ	Black/Bronze Ring, 75W
	ELM30BOV	Black/White Oversized Ring, 75W
	ELM30WOV	All White Oversized Ring, 75W
	ELM40W	All White, 150W
	ELM40B	Black/White Ring, 150W
	ELM40BZ	All Bronze, 150W
	ELM40BOV	Black/White Oversized Ring, 150W
ELM40WOV	All White Oversized Ring, 150W	
 6" Baffle Trim with Regressed Albalite Lens	ELM42W	All White
	ELM42B	Black/White Ring
	ELM42BZ	All Bronze
 6" Baffle Trim with Regressed Fresnel Lens	ELM43W	All White
	ELM43B	Black/White Ring
	ELM43BZ	All Bronze
 6" Metal Baffle Wall Wash Trim	ELM45W	All White
	ELM45B	Black/White Ring
 6" Baffle Trim with Regressed Drop Opal Lens	ELM46W	All White
	ELM46B	Black/White Ring
 6" Baffle Trim with Domed Regressed Frosted Lens	ELM47W	White
 6" Regressed Eyeball with Baffle Trim	ELM48W	All White
	ELM48B	Black/White Ring
	ELM48BB	All Black
	ELM48BZ	All Bronze
 6" Airtight Metal Baffle Cone Trim with Torsion Springs	ELM300W	All White, Self-Flanged
	ELM300B	Black/White Ring, Self-Flanged
	ELM300BB	All Black, Self-Flanged
	ELM300BZ	All Bronze, Self-Flanged
 6" Airtight Smooth Metal Cone Reflector Trim with Torsion Springs	ELM301W	All White, Self-Flanged
 6" Airtight Metal Cone Baffle Trim with Clips	ELM302BB	All Black

Line Voltage

for LED & Non-LED PAR, R, A and GU24 Based Lamps



6" Line Voltage Trims




Description	CAT. #	Specs
 6" One Piece Self Flanged Baffle Trim with Clips	ELM303W	White
 6" Shallow Self Flanged Baffle Trim with Torsion Springs	ELM305W	White
 6" Phenolic Step Baffle Trim	ELP40W	All White, 150W
	ELP40B	Black/White Ring, 150W
 6" Specular Reflector Trim	ELS30W	All White
	ELS30B	Black/White Ring
	ELS30C	Chrome/White Ring
	ELS30CC	All Chrome
 6" Reflector Trim with Regressed Albalite Lens	ELS42W	All White
	ELS42B	Black/White Ring
	ELS42C	Clear/White Ring
 6" Reflector Trim with Regressed Prismatic Glass Lens	ELS426W	All White
	ELS426B	Black/White Ring
	ELS426C	Clear/White Ring
	ELS426G	Gold/White Ring
 6" Die-cast Reflector Trim for PAR Lamps	ELL6810W	All White
	ELL6810B	All Black
	ELL6810BZ	All Bronze
 6" Die-cast Lensed Reflector Trim for PAR Lamps	ELL6812W	All White
	ELL6812BZ	All Bronze
 6" Die-cast Baffle Trim for PAR Lamps	ELL6813W	All White
	ELL6813BZ	All Bronze
 6" Die-cast Wall Wash Trim for PAR Lamps	ELL6815W	All White
	ELL6815B	All Black
	ELL6815BZ	All Bronze

Line Voltage



for PAR and A19 Lamps



7" Edison Base Housings & Trims

Description	CAT. #	Specs
 <p>7" Incandescent New Construction Architectural Housing</p>	ELH7T	150W MAX. 120V
 <p>7" Incandescent Remodel Architectural Housing</p>	ELRH7T	150W MAX. 120V
 <p>7" Reflector Trim</p>	EL716C	Clear/White Ring

8" Edison Base Housings & Trims

Description	CAT. #	Specs
 <p>8" Incandescent Remodel Architectural Housing</p>	ELRH8T	200W MAX. 120V
 <p>8" Reflector Trim</p>	EL816G	Gold/White Ring

Line Voltage



for LED & Non-LED PAR, R, A and GU24 Based Lamps



8" Incandescent Square Housings & Trims

Description	CAT. #	Specs
 8" Square Incandescent IC Single Wall Aluminum New Construction Housing	EL8SQ	75W MAX. 120V
 8" Square Incandescent IC Double Wall Aluminum New Construction Housing	EL8SQICA	75W MAX. 120V
 8" Square LED Retrofit 3-CCT Insert 	EL881CT5W	19W, 1460 lm - 1520 lm, 3000K / 3500K / 4000K, 120/277V, Triac/ELV
 8" Square Trim with Prismatic Glass Lens	EL10W	White
 8" Square Trim with Fresnel Lens	EL11W	White

12" LED Square Retrofit

Description	CAT. #	Specs
 12" Square LED Retrofit with 5-CCT Switch 	EL1212CT5W	22W, 1450 lm, 2700K - 5000K, 120V, Triac/ELV

The **Slant**[™] System



4" Dedicated LED Sloped
Ceiling IC Housings & LED Inserts

120

5" & 6" Dedicated LED Sloped
Ceiling IC Housings & LED Inserts

121

6" Dedicated LED Super Sloped
Ceiling IC Housings & LED Inserts

122

5" Line Voltage Sloped Ceiling
IC Housings & Trims

123

6" Line Voltage Sloped Ceiling
IC Housings & Trims

124

6" Line Voltage Super Sloped Ceiling
IC & Non-IC Housings & Trims









125

The Slant™ System

Sloped Ceiling Dedicated LED Lighting



4" Dedicated LED Sloped Ceiling IC Housing & Inserts

Description	CAT. #	Specs
 4" LED IC Airtight Sloped Ceiling Single Wall New Construction Housing	EL470ICA	14W, 120V
 4" LED IC Airtight Sloped Ceiling Remodel Housing	EL470RICA	14W, 120V
 4" Sloped Ceiling LED Baffle Insert with 5-CCT Switch  	EL423CT5W	White, 12W, 900 lm, 2700K - 5000K
	EL423CT5BZ	Bronze, 12W, 900 lm, 2700K - 5000K
 4" Sloped Ceiling LED Reflector Insert with 5-CCT Switch  	EL425CT5W	12W, 900 lm, 2700K - 5000K

4" Universal Sloped Ceiling Trims with Koto™ LED Module

Description	CAT. #	Specs
 4" Universal Sloped Ceiling Trims with Koto™ LED Modules 		<ul style="list-style-type: none"> • For use in ELK470ICA and ELK470RICA sloped housings • Designed for use in 2/12 (10°) to 12/12 (45°) sloped ceilings • O.D.: 5" - I.D.: 3 5/8"

Standard Koto™ Module Product Number Builder

Koto™ LED Module	Lumens	Color Temperature	Pex™ Sloped Trim	Finish
ELK Koto™ LED Module	07 770 lm - 860 lm	27 2700K	-ELK4357 Reflector	W All White
	09 940 lm - 1100 lm	30 3000K	-ELK4347 Reflector with Clear Glass	BB All Black
	11 1050 lm - 1260 lm	35 3500K	-ELK4349 Reflector with Frosted Lens	BZ All Bronze
		40 4000K		B Black /White Ring
		SD Sunset		H Haze /White Ring
	08 825 lm	CT5 2700K - 5000K		
	10 1000 lm			





Example: **ELK0735-ELK4357BB** [Koto™ LED Module, 770 - 860 lumens, 3500K, Pex™ Sloped Reflector Trim, All Black]

The Slant™ System





Sloped Ceiling Dedicated LED Lighting



5" Dedicated LED Sloped Ceiling IC Housing & Inserts

Description	CAT. #	Specs
 5" LED IC Airtight Sloped Ceiling Single Wall New Construction Housing	EL590ICA	24W, 120V
 5" LED IC Airtight Sloped Ceiling Remodel Housing	EL590RICA	24W, 120V
 5" Sloped Ceiling LED Baffle Insert	EL511CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL511CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL511CT5BZ	All Bronze, 15W, 1050 lm, 2700K - 5000K
 5" Sloped Ceiling LED Reflector Insert	EL512CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL512CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL512CT5C	Clear/White Ring, 15W, 1050 lm, 2700K - 5000K

6" Dedicated LED Sloped Ceiling IC Housing & Inserts

Description	CAT. #	Specs
 6" LED IC Airtight Sloped Ceiling Single Wall New Construction Housing	EL970ICA	24W, 120V
 6" LED IC Airtight Sloped Ceiling Remodel Housing	EL970RICA	24W, 120V
 6" Sloped Ceiling LED Baffle Insert with 5-CCT Switch	EL713CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL713CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL713CT5BZ	All Bronze, 15W, 1050 lm, 2700K - 5000K
	EL714CT5W	All White, 18W, 1200 lm, 2700K - 5000K
	EL714CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
	EL714CT5BZ	All Bronze, 18W, 1200 lm, 2700K - 5000K
 6" Sloped Ceiling LED Reflector Insert with 5-CCT Switch	EL715CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL715CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL715CT5C	Clear/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL716CT5W	All White, 18W, 1200 lm, 2700K - 5000K
	EL716CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
	EL716CT5C	Clear/White Ring, 18W, 1200 lm, 2700K - 5000K

Sloped Ceilings Pitch Range:











The Slant™ System


Sloped Ceiling Dedicated LED Lighting



6" Dedicated LED Super Sloped Ceiling IC Housings & Inserts

Description	CAT. #	Specs
 6" LED IC Airtight Super Sloped Ceiling Single Wall New Construction Housing	EL971ICA	24W, 120V
 6" LED IC Airtight Super Sloped Ceiling Remodel Housing	EL971RICA	24W, 120V
 6" Super Sloped Ceiling LED Baffle Insert with 5-CCT Switch  	EL763CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL763CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL763CT5BZ	All Bronze, 15W, 1050 lm, 2700K - 5000K
	EL764CT5W	All White, 18W, 1200 lm, 2700K - 5000K
	EL764CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
	EL764CT5BZ	All Bronze, 18W, 1200 lm, 2700K - 5000K
 6" Super Sloped Ceiling LED Reflector Insert with 5-CCT Switch  	EL761CT5W	All White, 15W, 1050 lm, 2700K - 5000K
	EL761CT5B	Black/White Ring, 15W, 1050 lm, 2700K - 5000K
	EL761CT5C	All Bronze, 15W, 1050 lm, 2700K - 5000K
	EL762CT5W	All White, 18W, 1200 lm, 2700K - 5000K
	EL762CT5B	Black/White Ring, 18W, 1200 lm, 2700K - 5000K
	EL762CT5C	All Bronze, 18W, 1200 lm, 2700K - 5000K

Super Sloped Ceilings Pitch Range:

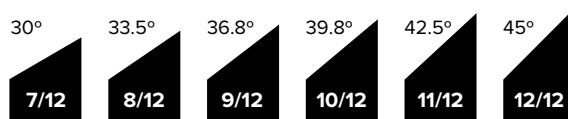


Line Voltage **Sloped Ceiling**

Sloped Housings & Trims







5" Line Voltage Sloped Ceiling IC Housings

Description	CAT. #	Specs
 <p>5" Airtight Slope IC New Construction Housing (Pitch ranging from 2/12 to 6/12 with trim)</p>	EL518ICA	75W MAX. 120V

 <p>5" Airtight Slope IC Remodel Housing (Pitch ranging from 2/12 to 6/12 with trim)</p>	EL518RICA	75W MAX. 120V
---	-----------	---------------

5" Line Voltage Sloped Trims




Description	CAT. #	Specs
 <p>5" Sloped Baffle Trim</p>	EL550W	All White
	EL550B	Black/White Ring
 <p>5" Sloped Reflector Trim</p>	EL555W	All White
	EL555B	All Black
	EL555C	Clear/White Ring
 <p>5" Sloped Baffle with Adjustable Gimbal Ring</p>	EL560W	All White
	EL560B	Black/White Ring
	EL560BZ	All Bronze
 <p>5" Sloped Reflector with Adjustable Gimbal Ring</p>	EL561W	All White
	EL561C	All Clear

Line Voltage Sloped Ceiling

Sloped Housings & Trims



6" Line Voltage Sloped Ceiling IC Housings

Description	CAT. #	Specs
 6" Sloped Ceiling Medium Base IC Airtight Double Wall New Construction Housing	EL936ICA	90W MAX. 120V
 6" Sloped Ceiling Medium Base IC Airtight Single Wall New Construction Housing	EL918ICA	75W MAX. 120V
 6" Sloped Ceiling Medium Base IC Airtight Remodel Housing	EL918RICA	75W MAX. 120V

6" Line Voltage Sloped Trims







Description	CAT. #	Specs
 6" Shower Trim with Albalite Lens	EL12W	All White
	EL12B	All Black
	EL12N	All Nickel
	EL12SH	White, Lexan Ring
	EL12BZ	All Bronze
	EL12KW	All White with Bracket
	EL12KSH	All White with Bracket, Lexan Ring
 6" Shower Trim with Fresnel Lens	EL13W	All White
	EL13B	All Black
	EL13N	All Nickel
	EL13SH	White, Lexan Ring
	EL13KW	All White with Bracket
	EL13KSH	All White with Bracket, Lexan Ring
	 6" Adjustable Sloped Baffle with Reflector Trim	EL601W
EL601B		Black/White Ring, 75W MAX.
 6" Sloped Baffle Trim With PAR30 Gimbal Ring	EL614W	All White, 75W MAX.
	EL614B	Black, 75W MAX.
	EL614C	Clear/White Ring, 75W MAX.
 6" Sloped Baffle Trim With PAR38 Gimbal Ring	EL615W	All White, 150W MAX.
	EL615B	Black, 150W MAX.
	EL615C	Clear/White Ring, 150W MAX.
 6" Sloped Reflector Trim	EL616W	All White, 75W MAX.
	EL616B	Black/White Ring, 75W MAX.
	EL616C	Clear/White Ring, 75W MAX.
	EL616G	Gold/White Ring, 75W MAX.
	EL616KW	All White, Socket Bracket, 75W MAX.
 6" Sloped Regressed Eyeball Baffle Trim	EL616KC	Clear White Ring, Socket Bracket, 75W MAX.
	EL618W	All White, 75W MAX.
 6" Sloped Baffle Trim With Coil Springs and Metal Trim Ring	EL618B	Black/White Ring, 75W MAX.
	EL622W	All White, 150W MAX.
	EL622B	Black/White Ring, 150W MAX.

Line Voltage Sloped Ceiling




Sloped Housings & Trims




6" Line Voltage Sloped Trims

Description	CAT. #	Specs
 <p>6" Adjustable Sloped Baffle Trim with Bracket</p>	EL622KW	All White
	EL622KB	Black/White Ring
	EL622KBB	All Black
	EL622KBZ	All Bronze
 <p>6" Sloped Reflector with Coil Springs Trim</p>	EL617W	All White, 150W MAX PAR38
 <p>6" Sloped Baffle with Coil Springs Trim</p>	EL623W	All White, 150W MAX PAR38
 <p>6" Adjustable Sloped Baffle with Gimbal Trim</p>	EL624W	All White, 75W, PAR30
 <p>6" Adjustable Sloped Baffle with Gimbal Trim</p>	EL626W	All White, 150W, PAR38
	EL626W	Black/White Ring, 150W
 <p>6" Reflector Trim with Albalite Lens</p>	EL642W	All White, 75W
	EL642C	Clear/White Ring, 75W
	EL642B	Black/White Ring, 75W

6" Line Voltage Super Sloped Ceiling IC Housings

Description	CAT. #	Specs
 <p>6" Super Sloped IC Airtight Medium Base Double Wall New Construction Housing</p>	EL946ICA	90W MAX. 120V
 <p>6" Super Sloped Ceiling Medium Base IC Airtight Single Wall New Construction Housing</p>	EL901ICA	75W MAX. 120V
 <p>6" Super Sloped Ceiling Medium Base IC Airtight Remodel Housing</p>	EL901RICA	75W MAX. 120V

Super Sloped Ceilings Pitch Range:

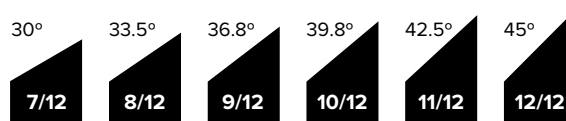



Line Voltage **Sloped Ceiling**







Sloped Housings & Trims




6" Line Voltage Super Sloped Ceiling Non-IC Housings

Description	CAT. #	Specs
 6" Super Sloped Ceiling Medium Base Non-IC Single Wall New Construction Housing	EL901HT	90W MAX. 120V
 6" Super Sloped Ceiling Medium Base Non-IC Remodel Housing	EL901RT	90W MAX. 120V

6" Line Voltage Super Sloped Trims

Description	CAT. #	Specs
 6" Super Sloped Baffle Trim	EL602W	All White, 90W PAR30/PAR38 or 75W BR30
	EL602B	Black/White Ring, 90W PAR30/PAR38 or 75W BR30
 6" Super Sloped Reflector Trim	EL606W	All White, 90W PAR30/PAR38 or 75W BR30
	EL606B	Black/White Ring, 90W PAR30/PAR38 or 75W BR30
	EL606C	Clear/White Ring, 90W PAR30/PAR38 or 75W BR30
	EL606G	Gold/White Ring, 90W PAR30/PAR38 or 75W BR30
 6" Super Sloped Baffle Trim with PAR30 Gimbal	EL603W	All White, 75W PAR30
	EL603B	Black/White Ring, 75W PAR30
 6" Super Sloped Reflector Trim with PAR30 Gimbal	EL604W	All White, 75W PAR30
	EL604B	Black/White Ring, 75W PAR30
	EL604C	Clear/White Ring, 75W PAR30
 6" Super Sloped Baffle Trim with PAR38 Gimbal	EL607W	All White, 90W MAX.
	EL607B	Black/White Ring, 90W MAX.
	EL607BZ	All Bronze, 90W MAX.
 6" Super Sloped Reflector Trim with PAR38 Gimbal	EL608W	All White, 90W PAR30
	EL608B	Black/White Ring, 90W PAR30
	EL608C	Clear/White Ring, 90W PAR30

Super Sloped Ceilings Pitch Range:

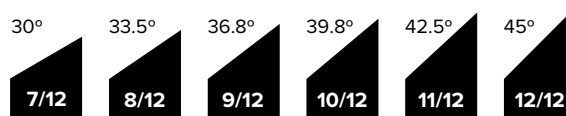

The **Sylo™** Collection



Koto Sylo™ Monopoint 129

Koto Sylo™ Track 130

Koto Sylo™ Wall Mount 131

Koto Sylo™ Surface Mount 132

Koto Sylo™ Pendant 133

Koto Sylo™ Direct Mount 134

Ply Sylo™ Surface Mount 136



Ply Sylo™ Pendant 136

The **Koto Sylo™**

Fixtures with **Koto™ Modules**

FOR STANDARD, FOCUS & LOW VOLTAGE KOTO™ MODULES

Available in a wide selection of applications

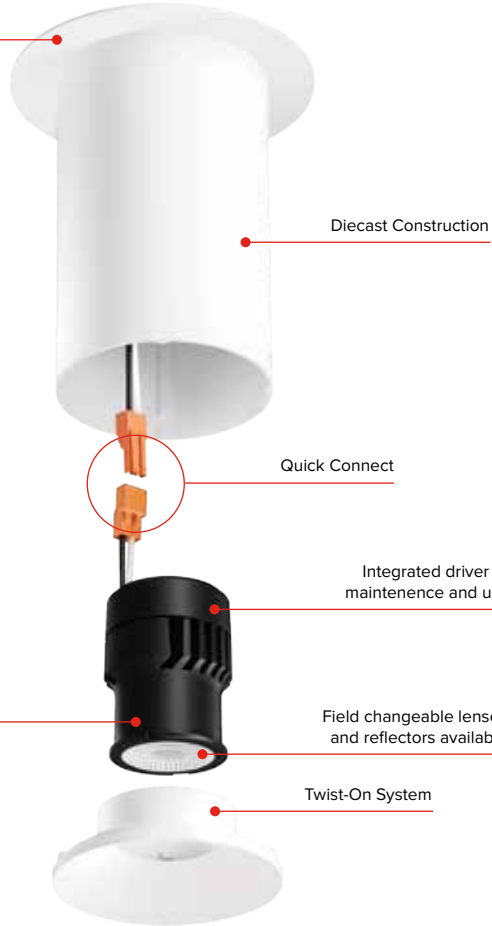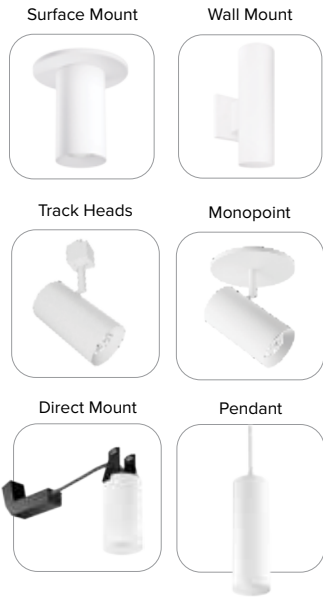

Compatible Koto Modules



Covered by U.S. PATENTS and Patents Pending

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
2" 3" 4" 6"	Surface Mount Wall Mount Pendant Monopoint Track Head Direct Mount	White Black Bronze Silver	720 lm to 1690 lm	2400K - 5000K & Sunset

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



Monopoint Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 28° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
E25 2" Sylo	M Monopoint	W All White	-03 350 lm ¹	24 2400K	(Blank) 38° lens ⁵	(Blank) Standard
E36 3" Sylo		B All Black	-07 750 lm	27 2700K	-S 18° lens	-12 12" Stem ⁶
		S All Silver	-09 950 lm	30 3000K	-N 25° lens	-24 24" Stem ⁶
			-11 1150 lm	35 3500K	-W 60° lens	-36 36" Stem ⁶
			-10DX 1000 lm (0-10V) ²	40 4000K		-48 48" Stem ⁶
			-13 1350 lm	SD Sunset ³		-60 60" Stem ⁶
				HC Human Centric ⁴		
			-08 825 lm	CT5 2700K - 5000K		
			-10 1000 lm			

Example: **E25MW-0735** [2" Koto Sylo™ Monopoint, All White, 750 lumens, 3500K]

¹Available in 2400K, 2700K & 3000K only
²Available as 120/277V, 0-10V/Triac/ELV

³Available in -09 & -11 lumen output only
⁴Available with -11 lumen output only

⁵Includes 25° & 60° lens in box
⁶Stems are not cuttable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
E25 2" Sylo	M Monopoint	W All White	-07 750 lm	27 2400K	-FC 18°-50°	(Blank) Standard
E36 3" Sylo		B All Black		30 2700K		-12 12" Stem ¹
		S All Silver		35 3500K		-24 24" Stem ¹
				40 4000K		-36 36" Stem ¹
				SD Sunset		-48 48" Stem ¹
						-60 60" Stem ¹

Example: **E25MW-0735-FC** [2" Koto Sylo™ Monopoint, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Stems are not cuttable



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
E25 2" Sylo	M Monopoint	W All White	-08 800 lm ¹	12A 12V AC	27 2700K	(Blank) 38° lens ²	(Blank) Standard
E36 3" Sylo		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ³
		S All Silver			SD Sunset	-N 25° lens	-24 24" Stem ³
					(12A only) ¹	-W 60° lens	-36 36" Stem ³
							-48 48" Stem ³
							-60 60" Stem ³

Example: **E25MW-0812A27-W-12** [2" Koto Sylo™ Monopoint, All White, 800 lumens, 12V AC, 2700K, 60° lens, 12" Stem]

¹Available in 12A (12V AC) voltage only

²Includes 25° & 60° lens in box

³Stems are not cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



Track Head Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 28° and 60° lenses. Optional: 18° lenses available
- Works with Single and Two Circuit Track
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
E25 2" Sylo E36 3" Sylo	T Track Head	W All White B All Black S All Silver BZ All Bronze ¹	-03 350 lm ² -07 750 lm -09 950 lm -11 1150 lm -10DX 1000 lm (0-10V) ³ -13 1350 lm	24 2400K 27 2700K 30 3000K 35 3500K 40 4000K SD Sunset ⁴ HC Human Centric ⁵ CT5 2700K - 5000K	(Blank) 38° lens ⁶ -S 18° lens -N 25° lens -W 60° lens	(Blank) Standard -12 12" Stem ⁷

Example: **E25TW-0327-24** [2" Koto Sylo™ Track Head, All White, 350 lumens, 2700K, 38° lens, 24" stem]

¹Stem not available in bronze

²Available in 2400K, 2700K & 3000K only

³Available as 120/277V, 0-10V/Triac/ELV

⁴Available in -09 & -11 lumen output only

⁵Available with -11 lumen output only

⁶Includes 25° & 60° lens in box

⁷Stems are not cuttable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
E25 2" Sylo E36 3" Sylo	T Track Head	W All White B All Black S All Silver BZ All Bronze ¹	-07 750 lm	27 2700K 30 3000K 35 3500K 40 4000K SD Sunset	-FC 18°-50°	(Blank) Standard -12 12" Stem ²


Example: **E25TW-0735-FC** [2" Koto Sylo™ Monopoint, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Stem not available in bronze

²Stems are not cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



NEW!



Wall Mount Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 28° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Title 24 JA8-2022 Compliant



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module (Down)	Beam Angle	Koto™ Module (Up)	Beam Angle	Color Temperature
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
E25 2"	A Wall Mount	W All White	03 350 lm ¹	(Blank) 38° lens ³	(Blank) No Module	(Blank) 38° lens ³	24 2400K
E36 3"		B All Black	07 750 lm	-S 18° lens	-03 350 lm ¹	-S 18° lens	27 2700K
E42 4"		BZ All Bronze	09 950 lm	-N 25° lens	-07 750 lm	-N 25° lens	30 3000K
			11 1150 lm	-W 60° lens	-09 950 lm	-W 60° lens	35 3500K
			13 1350 lm		-11 1150 lm		40 4000K
			08 825 lm ²		-13 1350 lm		SD Sunset ⁴
			10 1000 lm ²		-08 825 lm ²		HC Human Centric ⁵
					-10 1000 lm ²		CT5 2700K - 5000K ⁶

Example: **E42ABZ09-09SD** [4" Koto Sylo™ Wall Mount, All Bronze, 950 lumens, 950 lumens, Sunset]

¹Available in 2400K, 2700K & 3000K only

²Available with CT5 only

³Includes 25° & 60° lens in box

⁴Available in -09 & -11 lumen output only

⁵Available with -11 lumen output only

⁶Available in -08 & -10 lumen output only

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



Surface Mount Koto Sylo™



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 28° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- 90° tilt, 358° rotation
- Energy Star Compliant. Title 24 JA8-2022 Compliant
- 30° MAX. tilt (E429F & E629F Adjustable Surface Mount Series Only)

Standard Koto™ Module Product Number Builder



Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
E25 2" Fixed	F Surface Mount	W All White	-03 350 lm ¹	24 2400K	(Blank) 38° lens ⁵	(Blank) Standard
E36 3" Fixed		B All Black	-07 750 lm	27 2700K	-S 18° lens	-12 12" Stem ⁶
E42 4" Fixed		S All Silver	-09 950 lm	30 3000K	-N 25° lens	-24 24" Stem ⁶
E429 4" Adjustable			-11 1150 lm	35 3500K	-W 60° lens	-36 36" Stem ⁶
E648 6" Fixed			-10DX 1000 lm (0-10V) ²	40 4000K		-48 48" Stem ⁶
E629 6" Adjustable			-13 1350 lm	SD Sunset ³		-60 60" Stem ⁶
				HC Human Centric ⁴		
			-08 825 lm	CT5 2700K - 5000K		
			-10 1000 lm			

Example: **E25MW-0735** [2" Koto Sylo™ Monopoint, All White, 750 lumens, 3500K]

¹Available in 2400K, 2700K & 3000K only

²Available in -09 & -11 lumen output only

³Includes 25° & 60° lens in box

⁴Available as 120/277V, 0-10V/Triac/ELV

⁵Available with -11 lumen output only

⁶Stems are not cuttable

Koto™ Focus Module Product Number Builder



Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
E25 2" Sylo	F Surface Mount	W All White	-07 750 lm	27 2400K	-FC 18°-50°	(Blank) Standard
E36 3" Sylo		B All Black		30 2700K		-12 12" Stem ¹
E42 4" Sylo		S All Silver		35 3500K		-24 24" Stem ¹
				40 4000K		-36 36" Stem ¹
				SD Sunset		-48 48" Stem ¹
						-60 60" Stem ¹

Example: **E25FW-0735-FC** [2" Koto Sylo™ Surface Mount, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹Stems are not cuttable

Low Voltage Koto™ Module Product Number Builder



Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E25 2" Fixed	F Surface Mount	W All White	-08 800 lm ¹	12A 12V AC	27 2700K	(Blank) 38° lens ²	(Blank) Standard
E36 3" Fixed		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ³
E42 4" Fixed		S All Silver			SD Sunset	-N 25° lens	-24 24" Stem ³
E429 4" Adjustable					(12A only) ¹	-W 60° lens	-36 36" Stem ³
E648 6" Fixed							-48 48" Stem ³
E629 6" Adjustable							-60 60" Stem ³

Example: **E25FW-0812A27** [2" Koto Sylo™ Surface Mount, All White, 800 lumens, 12V AC, 2700K]

¹Available in 12A (12V AC) voltage only

²Includes 25° & 60° lens in box

³Stems are not cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



Pendant Koto Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 28° and 60° lenses. Optional: 18° lenses available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- Available with 120" Field Cuttable Cable or Stems (12", 24", 36", 48", and 60")
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant
- 30° MAX. tilt (E429F & E629F Adjustable Surface Mount Series Only)



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle	Length
E25 2" Fixed	P Pendant	W All White	-03 350 lm ¹	24 2400K	(Blank) 38° lens ⁵	(Blank) 120" Cable Mount ⁶
E36 3" Fixed		B All Black	-07 750 lm	27 2700K	-S 18° lens	-12 12" Stem ⁷
E42 4" Fixed		S All Silver	-09 950 lm	30 3000K	-N 25° lens	-24 24" Stem ⁷
E429 4" Adjustable			-11 1150 lm	35 3500K	-W 60° lens	-36 36" Stem ⁷
E648 6" Fixed			-10DX 1000 lm (0-10V) ²	40 4000K		-48 48" Stem ⁷
E629 6" Adjustable			-13 1350 lm	SD Sunset ³		-60 60" Stem ⁷
				HC Human Centric ⁴		
			-08 825 lm	CT5 2700K - 5000K		
			-10 1000 lm			

Example: **E25MW-0735** [2" Koto Sylo™ Monopoint, All White, 750 lumens, 3500K]

¹Available in 2400K, 2700K & 3000K only

³Available in -09 & -11 lumen only

⁵Includes 25° & 60° lens in box

⁷Stems are not cuttable

²Available as 120/277V, 0-10V/Triac/ELV

⁴Available with -11 lumen only

⁶120 inch field cuttable cable



Koto™ Focus Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Focus Module	Color Temperature	Beam Angle	Length
E25 2" Sylo	P Pendant	W All White	-07 750 lm	27 2400K	-FC 18°-50°	(Blank) 120" Cable Mount ¹
E36 3" Sylo		B All Black		30 2700K		-12 12" Stem ²
E42 4" Sylo		S All Silver		35 3500K		-24 24" Stem ²
				40 4000K		-36 36" Stem ²
				SD Sunset		-48 48" Stem ²
						-60 60" Stem ²

Example: **E25FW-0735-FC** [2" Koto Sylo™ Surface Mount, All White, 750 lumens, 3500K, 18°-50° beam angle]

¹120 inch field cuttable cable

²Stems are not cuttable



Low Voltage Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Voltage	Color Temp.	Beam Angle	Length
E25 2" Fixed	P Pendant	W All White	-08 800 lm ¹	12A 12V AC	27 2700K	(Blank) 38° lens ²	(Blank) 120" Cable Mount ³
E36 3" Fixed		B All Black		24D 24V DC	30 3000K	-S 18° lens	-12 12" Stem ⁴
E42 4" Fixed		S All Silver			SD Sunset	-N 25° lens	-24 24" Stem ⁴
E429 4" Adjustable					(12A only) ¹	-W 60° lens	-36 36" Stem ⁴
E648 6" Fixed							-48 48" Stem ⁴
E629 6" Adjustable							-60 60" Stem ⁴

Example: **E42PB-0824D27** [4" Koto Sylo™ Pendant, All Black, 800 lumens, 24V DC, 2700K, 38° lens, 120" Cable Mount]

¹Available in 12A (12V AC) voltage only

²Includes 25° & 60° lens in box

³120 inch field cuttable cable

⁴Stems are not cuttable

The Koto Sylo™ System

2" Aperture Fixtures with Twist-On System



NEW!

Direct Mount Koto Sylo™



- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Includes Standard 38° lens, with 28° and 60° lenses. Optional: 18° lenses available
- Directly mounts into ceiling (Up to 1.5" ceiling thickness)
- Optional mounting frame (E1LF1)
- Sunset option dims from 3000K to 1800K. Human Centric option dims from 4000K to 2200K
- Energy Star Compliant. Title 24 JA8-2022 Compliant
- 120V Triac/ELV with standard module options



Standard Koto™ Module Product Number Builder

Koto Sylo™	Style	Finish	Koto™ Module	Color Temperature	Beam Angle
E25 2" Sylo	D Direct Mount	W All White	-03 350 lm ¹	24 2400K	(Blank) 38° lens ⁴
E36 3" Sylo		B All Black	-07 750 lm	27 2700K	-S 18° lens
		S All Silver	-09 950 lm	30 3000K	-N 25° lens
			-11 1150 lm	35 3500K	-W 60° lens
			-13 1350 lm	40 4000K	
				SD Sunset ²	
				HC Human Centric ³	
			-08 825 lm	CT5 2700K - 5000K	
			-10 1000 lm		

Example: **E25DW-0324-S** [2" Koto Sylo™ Direct Surface Mount, All White, 350 lumens, 2400K, 18° lens]


¹Available in 2400K, 2700K & 3000K only

³Available with -11 lumen output only

²Available in -09 & -11 lumen output only

⁴Includes 25° & 60° lens in box

Mounting Frame

Description	CAT. #	Specs
 Optional Mounting Frame	E1LF1	Requires transformer

The **Ply Sylo™**

Fixtures with **Ply™** LED Inserts

WITH MANUAL COLOR TEMPERATURE & LUMEN OUTPUT SWITCH

Available in Surface Mount and Pendant applications

Surface Mount

Pendant

120" Field Cuttable Cable

Diecast Construction

Manual switch to choose desired Color Temperature and Lumen Output

120V Triac/ELV dimming or 120/277V 0-10V dimming options available

Frosted Lens

All White, All Black, and Haze/White Ring Finish Options Available

A8
TITLE 24 COMPLIANT

DIMMABLE










90+ CRI

WET LOCATION

50K HRS
50,000 HOURS

5YR
5 YEAR WARRANTY

LUMEN Switch **CCT SWITCH**

SIZES	STYLES	FINISHES	LUMENS	COLOR TEMPERATURE
 4"	 Surface Mount	 White  Black  Haze	 1000 lm to 2000 lm	 2700K - 5000K
 6"	 Pendant			

The Ply Sylo™ System

4" & 6" Surface Mount LED Fixtures



NEW!



Surface Mount Ply Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- 90+ CRI for extremely accurate color rendering
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Ply™ Module Product Number Builder

Ply Sylo™ Surface Mount	Lumen Output	Color Temperature	Finish	Optional
ESF4271 4" Ply Sylo (120V, Triac/ELV) ¹	L3 Switch up to 2000 lm ⁴	CT5 2700K - 5000K	W All White	(Blank) No Emergency Battery
ESF475U 4" Ply Sylo (120/277V, 0-10V) ²	10 1000 lm ⁵		BB All Black ⁶	
ESF6371 6" Ply Sylo (120V, Triac/ELV) ³			HW White/Haze Reflector	EM 15W MAX. Emergency Battery ⁷
ESF685U 6" Ply Sylo (120/277V, 0-10V) ³				

Example: **ESF427110CT5W** [4" Ply Sylo™ Surface Mount, 1000 lumens, 2700K-5000K, All White]

¹Lumen Switch: 1000/1250/1500 lm

²Lumen Switch: 850/1000/1500 lm

³Lumen Switch: 1000/1500/2000 lm

⁴Lumen switch located on module

⁵Only available with ESF4271 & ESF6371 in White & White/Haze Reflector

⁶Available for L3 option only

⁷The fixture becomes 120V only

NEW!



Pendant Ply Sylo™

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Manual switch to choose desired Color Temperature and Lumen Output
- 120V Triac/ELV dimming or 120/277V 0-10V dimming options available
- Compatible with: 3 1/2" and 4" Octagon and Round Junction Boxes, and 3 3/4" Square Junction Boxes
- 120" Field Cuttable Cable
- 90+ CRI for extremely accurate color rendering
- Energy Star Compliant. Title 24 JA8-2022 Compliant



Standard Ply™ Module Product Number Builder

Ply Sylo™ Pendant	Lumen Output	Color Temperature	Finish	Optional
EPD4271 4" Ply Sylo (120V, Triac/ELV) ¹	L3 Switch up to 2000 lm ⁴	CT5 2700K - 5000K	W All White	(Blank) No Emergency Battery
EPD475U 4" Ply Sylo (120/277V, 0-10V) ²	10 1000 lm ⁵		BB All Black ⁶	
EPD6371 6" Ply Sylo (120V, Triac/ELV) ³			HW White/Haze Reflector	EM 15W MAX. Emergency Battery ⁷
EPD685U 6" Ply Sylo (120/277V, 0-10V) ³				

Example: **EPD637110CT5W** [6" Ply Sylo™ Pendant, 1000 lumens, 2700K-5000K, All White]

¹Lumen Switch: 1000/1250/1500 lm

²Lumen Switch: 850/1000/1500 lm

³Lumen Switch: 1000/1500/2000 lm

⁴Lumen switch located on module

⁵Only available with EPD4271 & EPD6371 in White & White/Haze Reflector

⁶Available for L3 option only

⁷The fixture becomes 120V only


Ceiling Mount Fixtures









120V LED SKY Panels™, LED SKY Panels™ XL & Accessories	138
0-10V LED SKY Panels™	140
LED Disk Light	140
Dustin™ & Darby™ Ceiling Mount LED Lights	141

Ceiling Mount Fixtures






































Sky Panels™, Flush Mount & LED Disk Lights



Junction Box for Ceiling Mount Fixtures


Description	CAT. #	Specs
 Square New Construction Box	ELJ4S	3 3/4" Sq x 2 3/8"
 Junction Box without Hanger Bars	ELJ332	3 3/4" Sq x 2 3/8"
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714		
 Square Junction Box with Hanger Bars for 2-Hour Fire Rated Ceilings	EJB44ICA	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 1/2" H
 Junction Box without Hanger Bars for 2-Hour Fire Rated Ceilings	ELJ443	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 1/2" H
 4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4ICA	4" O.D. x 4 1/2" H
 4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICA	4" O.D. x 4 1/2" H

Sky Panels™ LED Edge Lit



Description	CAT. #	Specs
 4" Round Sky Panel™	  ELSP43CT5W	White, 10W, 600 lm, 2700K - 5000K
	 ELSP43CT5B	Black, 10W, 600 lm, 2700K - 5000K
 4" Square Sky Panel™	 ELSP4430W	White, 10W, 600 lm, 3000K
	 ELSP4430B	Black, 10W, 600 lm, 3000K
	 ELSP4440W	White, 10W, 650 lm, 4000K
	 ELSP4440B	Black, 10W, 650 lm, 4000K
 6" Round Sky Panel™	  ELSP63CT5W	White, 15W, 900 lm, 2700K - 5000K
	 ELSP63CT5B	Black, 15W, 900 lm, 2700K - 5000K
 6" Square Sky Panel™	  ELSP66CT5W	White, 15W, 900 lm, 2700K - 5000K
	 ELSP66CT5B	Black, 15W, 900 lm, 2700K - 5000K
 8" Round Sky Panel™	  ELSP8327W	White, 18W, 1150 lm, 2700K
	 ELSP8327B	Black, 18W, 1150 lm, 2700K
	  ELSP83CT5W	White, 18W, 1200 lm, 2700K - 5000K
	 ELSP83CT3B	Black, 18W, 1200 lm, 3000K - 4000K
 8" Square SkyPanel™	 ELSP8830W	White, 18W, 1200 lm, 3000K
	 ELSP8830B	Black, 18W, 1200 lm, 3000K
	 ELSP8840W	White, 18W, 1300 lm, 4000K
	 ELSP8840B	Black, 18W, 1300 lm, 4000K
 12" Round SkyPanel™	  ELSP12CT5W	White, 22W, 1450 lm, 2700K - 5000K
	 ELSP12CT5B	Black, 22W, 1450 lm, 2700K - 5000K
 12" Square SkyPanel™	  ELSP22CT5W	White, 22W, 1450 lm, 2700K - 5000K
	 ELSP22CT5B	Black, 22W, 1450 lm, 2700K - 5000K

Ceiling Mount Fixtures

Sky Panels™, Flush Mount & LED Disk Lights









Accessories for 4" & 6" LED Sky™ Panels




Description	CAT. #	Specs
 <p>Emergency Battery Back-Up (For use with 4" & 6" Round Sky Panels)</p> 	KEM-ELSW	15W, Input: 120V, 50/60Hz, 90 minutes of emergency operation, test switch. 8" O.D. x 1 1/8" H


 <p>Empty Emergency Battery Casing (For use with 4" & 6" Round Sky Panels)</p>	KMTH-ELSW	Empty emergency battery casing to match emergency battery units look. <i>Emergency battery NOT included.</i>
---	-----------	---

Sky Panels™ XL LED Edge Lit


Description	CAT. #	Specs
 <p>12" x 24" Sky Panel™ XL with 5-CCT Switch</p>  	ELSP1224CT5W	White, 22W, 2000 lm, 3000K, 3500K, 4000K, 4500K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required)

 <p>12" x 48" Sky Panel™ XL with 5-CCT Switch</p>  	ELSP1248CT5W	White, 40W, 4000 lm, 2700K, 3000K, 3500K, 4000K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required)
--	--------------	---

 <p>24" x 24" Sky Panel™ XL with 3-CCT Switch</p>  	ELSP2424CT5W	White, 40W, 4000 lm, 2700K, 3000K, 3500K, 4000K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required)
---	--------------	---

 <p>24" x 48" Sky Panel™ XL with 5-CCT Switch</p>  	ELSP2448CT5W	White, 40W, 4000 lm 2700K, 3000K, 3500K, 4000K, 5000K Can be recessed in T-bar/Grid ceilings (ELSPRM junction box required)
---	--------------	--


Accessories for LED Sky™ Panels XL

Description	CAT. #	Specs
 <p>Recessed Mount Junction Box</p>	ELSPRM	4" L x 3 3/8" W x 7/8" H







 <p>Pendant Mounting Kit</p>	ELSPPD	Installation requires ELSPRM Junction Box.
---	--------	---

Ceiling Mount Fixtures







Sky Panels™, Flush Mount & LED Disk Lights









Junction Box for Ceiling Mount Fixtures

Description	CAT. #	Specs
 Square New Construction Box	ELJ4S	3 3/4" Sq x 2 3/8"
 Junction Box without Hanger Bars	ELJ332	3 3/4" Sq x 2 3/8"
A maximum 2-Hour Fire Rated ceiling assembly can be maintained when installed according to the International Building Code, Section 714		
 Square Junction Box with Hanger Bars for 2-Hour Fire Rated Ceilings	EJB44ICA	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 1/2" H
 Junction Box without Hanger Bars for 2-Hour Fire Rated Ceilings	ELJ443	IC Airtight for use in IC & Non-IC Applications. 4" Sq x 3 1/2" H
 4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4ICA	4" O.D. x 4 1/2" H
 4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings	EJB4RICA	4" O.D. x 4 1/2" H

120/277V 0-10V Sky Panels™ LED Edge Lit


Description	CAT. #	Specs
 0-10V Dimmable 6" Round Sky Panel™  	ELSP63DXCT3W	White, 14W, 1000 lm, 3000K - 4000K 120/277V, 0-10V dimmable
	ELSP63DXCT3B	Black, 14W, 1000 lm, 3000K - 4000K 120/277V, 0-10V dimmable
 0-10V Dimmable 8" Round Sky Panel™  	ELSP83DXCT3W	White, 17W, 1400 lm, 3000K - 4000K 120/277V, 0-10V dimmable
	ELSP83DXCT3B	Black, 17W, 1400 lm, 3000K - 4000K 120/277V, 0-10V dimmable

LED Disk Lights





Description	CAT. #	Specs
 4" Alva™ LED Disk Light  	ELSF4030BZ	Bronze, 13W, 800 lm, 3000K
	ELSF4030N	Nickel, 13W, 800 lm, 3000K
	ELSF40CT5W	White, 10W, 600 lm, 2700K - 5000K
	ELSF40CT5B	Black, 10W, 600 lm, 2700K - 5000K
 6" Alva™ LED Disk Light  	ELSF1127W	White, 13W, 900 lm, 2700K
	ELSF1130W	White, 13W, 900 lm, 3000K
	ELSF11CT5W	White, 15W, 900 lm, 2700K - 5000K
	ELSF11CT5B	Black, 15W, 900 lm, 2700K - 5000K
	ELSF11CT5BZ	Bronze, 15W, 900 lm, 2700K - 5000K

Ceiling Mount Fixtures



Sky Panels™, Flush Mount & LED Disk Lights



Darby™ LED Ceiling Lights

Description	CAT. #	Specs
 <p>10" - 16" HIGHLUMEN Double Ring Ceiling Light</p> <p> DAMP LOCATION</p> <p> CCT SWITCH</p> <p> CCT SWITCH</p>	ELD11030W	Nickel, 10", 14W, 980 lm, 3000K
	ELD11040W	Nickel, 10", 14W, 1010 lm, 4000K
	ELD21030W	Nickel, 10", 18W, 1170 lm, 3000K
	ELD21030BZ	Bronze, 10", 18W, 1170 lm, 3000K
	ELD21040W	Nickel, 10", 18W, 1260 lm, 4000K
	ELD21040BZ	Bronze, 10", 18W, 1260 lm, 4000K
	ELD21230BZ	Bronze, 12", 22W, 1430 lm, 3000K
	ELD21240BZ	Bronze, 12", 22W, 1550 lm, 4000K
	ELD11430W	Nickel, 14", 22W, 1650 lm, 4000K
	ELD14CT5W	Nickel, 14", 25W, 1700 lm, 2700K - 5000K
	ELD14CT5B	Black, 14", 25W, 1700 lm, 2700K - 5000K
	ELD16CT5W	Nickel, 16", 28W, 2000 lm, 2700K - 5000K

Dustin™ LED Ceiling Lights

Description	CAT. #	Specs
 <p>12" - 16" HIGHLUMEN Ceiling Light</p> <p> DAMP LOCATION</p>	ELD32230W	12", 22W, 1540 lm, 3000K
	ELD32240W	12", 22W, 1540 lm, 4000K
	ELD31430W	14", 18W, 1260 lm, 3000K
	ELD31440W	14", 18W, 1260 lm, 4000K
	ELD32630W	16", 30W, 2100 lm, 3000K
	ELD32640W	16", 30W, 2100 lm, 4000K

Track & Pendant Lighting












Integrated LED Track Heads	143
Integrated LED Wall Wash	146
MR16 Low Voltage Track Heads for LED or Halogen Lamps	147
MR16 GU10 Line Voltage Track Heads	153
120V Line Voltage Track Fixtures	154
Single & Two Circuit Track and Accessories	159
LED Pendants	164
Line and Low Voltage Pendants & Accessories	165

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip



Integrated LED Track Heads

Description		CAT. #	Specs
	LED Albright™ 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET580DW	White, 10W, 800 lm, 3000K
	LED Clove II™ HIGHLUMEN 38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available	ET578L30W	White, 14W, 1075 lm, 3000K
		ET578L30B	Black, 14W, 1075 lm, 3000K
	LED Halter™	ET597B	Black, 40W, 2000 lm, 3000K
	LED Transom™ 38° Beam angle standard. Optional Lenses: EP719C (15°) or EP720C (24°) available	ET612DW	White, 10W, 800 lm, 3000K
		ET612DB	Black, 10W, 800 lm, 3000K
	LED Transom™ HIGHLUMEN 38° Beam angle standard. Optional Lenses: EP722C (15°) or EP723C (24°) available	ET613DW	White, 17W, 1500 lm, 3000K
		ET613DB	Black, 17W, 1500 lm, 3000K
		ET613-35DW	White, 17W, 1500 lm, 3500K
		ET613-35DB	Black, 17W, 1500 lm, 3500K
		ET613-40DW	White, 17W, 1500 lm, 4000K
	LED Trilene™ HIGHLUMEN 38° Beam angle standard. Optional Lenses: EP726C (15°) or EP727C (24°) available	ET615CT5DW	White, 17W, 1300 lm, 2700K, 3000K, 3500K, 4000K, 5000K
		ET615CT5DB	Black, 17W, 1300 lm, 2700K, 3000K, 3500K, 4000K, 5000K
	LED Stein™ HIGHLUMEN 38° Beam angle standard. Optional Lenses: EP719C (15°) or EP720C (24°) available	ET616-27DW	White, 10W, 800 lm, 2700K
		ET616-27DB	Black, 10W, 800 lm, 2700K
		ET616CT3DW	White, 10W, 800 lm, 3000K, 3500K, 4000K
	LED Stein™ 38° Beam angle standard. Optional Lenses: EP722C (15°) or EP723C (24°) available	ET616CT3DB	Black, 10W, 800 lm, 3000K, 3500K, 4000K
		ET617CT3DW	White, 18W, 1500 lm, 3000K, 3500K, 4000K
	LED Timber™	ET740B	18°, Black, 10W, 650 lm, 3000K
		ET741B	40°, Black, 10W, 650 lm, 3000K
		ET742B	60°, Black, 10W, 650 lm, 3000K








For our full line of Track and Track accessories visit elcolighting.com

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip



Integrated LED Track Heads

Description	CAT. #	Specs	
 <p>LED Magnus™</p>	ET743DW	15°, White, 15W, 1000 lm, 3000K	
	ET743DB	15°, Black, 15W, 1000 lm, 3000K	
	ET743-35DW	15°, White, 15W, 1050 lm, 3500K	
	ET744DW	25°, White, 15W, 1000 lm, 3000K	
	ET744DB	25°, Black, 15W, 1000 lm, 3000K	
	ET744-35DW	25°, White, 15W, 1050 lm, 3500K	
	ET745DW	38°, White, 15W, 1000 lm, 3000K	
	ET745DB	38°, Black, 15W, 1000 lm, 3000K	
	ET745-35DW	38°, White, 15W, 1050 lm, 3500K	
	ET746DW	60°, White, 15W, 1100 lm, 3000K	
ET746DB	60°, Black, 15W, 1100 lm, 3000K		
ET746-35DW	60°, White, 15W, 1100 lm, 3500K		
 <p>LED Celtic™</p>	ET750DB	25°, Black, 15W, 1000 lm, 3000K	
	ET752DB	35°, Black, 15W, 1000 lm, 3000K	
	ET752-35DW	35°, White, 15W, 1050 lm, 3500K	
 <p>24°-46° Field Adjustable Beam Angle LED Angler™</p>	ET756DW	White, 15W, 1000 lm, 3000K	
	 <p>24°-46° Field Adjustable Beam Angle LED Angler™ HIGHLUMEN</p>	ET757DW	White, 30W, 2000 lm, 3000K
		ET757DB	Black, 30W, 2000 lm, 3000K
 <p>18°-50° Field Adjustable Beam Angle LED Bachman™</p>	ET75830DW	20W Adjustable Beam, 1600 lm	
	ET75830DB	20W Adjustable Beam, 1600 lm	
 <p>LED Cleat™</p> <p>38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available</p>	ET62530DW	White, 10W, 700 lm, 3000K	
	ET62530DB	Black, 10W, 700 lm, 3000K	
	ET62630DW	White, 13W, 1000 lm, 3000K	
	ET62630DB	Black, 13W, 1000 lm, 3000K	
 <p>LED Cleat™ Monopoint</p> <p>38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available</p>	ET579L30W	White, 10W, 730 lm, 3000K	
	ET579L30B	Black, 10W, 730 lm, 3000K	
	ET579L35W	White, 10W, 760 lm, 3500K	
	ET579L35B	Black, 10W, 760 lm, 3500K	

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip



Integrated LED Track Heads

Description	CAT. #	Specs
 <p>LED Gordian™ (Mini)</p> <p>38° Beam angle standard.  Optional lenses: EP719C (15°) or EP720C (24°) available</p>	ET618CT3DW	White, 10W, 750 lm, 3000K, 3500K, 4000K
	ET618CT3DB	Black, 10W, 750 lm, 3000K, 3500K, 4000K
 <p>LED Gordian™ (S)</p> <p>38° Beam angle standard.  Optional lenses: EP719C (15°) or EP720C (24°) available</p>	ET619CT3DW	White, 20W, 1150 lm, 3000K, 3500K, 4000K
	ET619CT3DB	Black, 20W, 1150 lm, 3000K, 3500K, 4000K
 <p>LED Gordian™ (M)</p> <p>HIGHLUMEN  38° Beam angle standard.  Optional lenses: EP719C (15°) or EP720C (24°) available</p>	ET620CT3DW	White, 30W, 2200 lm, 3000K, 3500K, 4000K
	ET620CT3DB	Black, 30W, 2200 lm, 3000K, 3500K, 4000K
 <p>LED Gordian™ (L) HIGHLUMEN </p>	ET62130DB	Black, 40W, 2900 lm, 3000K
 <p>LED Gordian™ (L)</p> <p></p>	ET621CT3DW	White, 40W, 3050 lm, 3000K, 3500K, 4000K
	ET621CT3DB	Black, 40W, 3050 lm, 3000K, 3500K, 4000K
 <p>LED Uni™</p>	ET62730DB	Black, 8W, 600 lm, 3000K
 <p>LED Tiggap™</p> <p>38° Beam angle standard. Optional lenses: EP719C (15°) or EP720C (24°) available</p>	ET62830DW	White, 13W, 1000 lm, 3000K
 <p>LED Axle™</p>	ET591B	Black, 10W, 520 lm, 3000K










For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads



All Track fixtures can be used with 120V Single or Two Circuit Track J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip





Integrated LED Wall Wash Track Fixtures

Description	CAT. #	Specs
 LED Pipe™ (6")  	ETW46CT3W	White, 14W, 1000 lm, 3000K, 3500K, 4000K
	ETW46CT3B	Black, 14W, 1000 lm, 3000K, 3500K, 4000K
 LED Pipe™ (12") 	ETW42CT3W	White, 20W, 1400 lm, 3000K, 3500K, 4000K
	ETW42CT3W-J	White, 20W, 1400 lm, With Junto Tip, 3000K, 3500K, 4000K
	ETW42CT5B	Black, 20W, 1550 lm, 2700K, 3000K, 3500K, 4000K, 5000K
	ETW42CT5B-J	Black, 20W, 1550 lm, With Junto Tip, 2700K, 3000K, 3500K, 4000K, 5000K
 LED Pipe™ (21") 	ETW43CT3W	White, 40W, 2500 lm, 3000K, 3500K, 4000K
	ETW43CT3B	Black, 40W, 2500 lm, 3000K, 3500K, 4000K
 LED Pipe™ (27") 	ETW44CT5W	White, 58W, 4000 lm, 2700K, 3000K, 3500K, 4000K, 5000K
	ETW44CT5B	Black, 58W, 4000 lm, 2700K, 3000K, 3500K, 4000K, 5000K

Integrated LED Linear Track Fixtures

Description	CAT. #	Specs
 LED Tarbuck™ 	ETL2130W	White, 18W, 1400 lm, 3000K
	ETL21CT3B	Black, 18W, 1400 lm, 3000K, 3500K, 4000K
	ETL2140W	White, 18W, 1500 lm, 4000K


Integrated LED Wall Wash Track Fixtures Accessories

Description	CAT. #	Specs
 Front Louver (12") for ETW4030 & ETW4040	EP555W	
	EP555B	
 Front Louver (24") for ETW4130 & ETW4140	EP666W	
	EP666B	


For our full line of Track and Track accessories visit elcolighting.com

Track Heads






All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



Architectural Flood/Wall Wash Biax Series Track Fixtures

Description	CAT. #	Specs
 <p>Flood Wall Wash</p>	ET226B	Black, 3600 lm, 24/27W biax lamps


MR16 Low Voltage Track Heads for LED or Halogen Lamps

Description	CAT. #	Specs
 <p>Low Voltage Zeppelin™ for LED or Halogen MR16 BiPin</p>	ETLD526W	White, 120V - 50W MAX.
	ETLD526B	Black, 120V - 50W MAX.
 <p>Low Voltage Cylinder for LED or Halogen MR16 BiPin</p>	ETLD528W	White, 120V - 50W MAX.
	ETLD528B	Black, 120V - 50W MAX.
	ETLD528BZ	Bronze, 120V - 50W MAX.
	ETLD528CP	Copper, 120V - 50W MAX.
	ETLD528G	Gold, 120V - 50W MAX.
 <p>Low Voltage Anchor™ for LED or Halogen MR16 BiPin</p>	ETLD530WW	All White, 120V, 3W - 50W MAX.
	ETLD530W	White/Black, 120V, 3W - 50W MAX.
	ETLD530B	Black, 120V, 3W - 50W MAX.
 <p>Low Voltage Hoxton™ for LED or Halogen MR16 BiPin</p>	ETLD532W	White, 120V - 50W MAX.
	ETLD532B	Black, 120V - 50W MAX.
 <p>Low Voltage Icicle™ for LED or Halogen MR16 BiPin</p>	ETLD534W	White, 120V, 50W MAX.








For our full line of Track and Track accessories visit elcolighting.com

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip





MR16 Low Voltage Track Heads for Halogen Lamps

Description	CAT. #	Specs
 <p>Low Voltage Studio II™ for LED or Halogen MR16 BiPin</p>	ETLD558W	White, 120V, 50W MAX.
	ETLD558B	Black, 120V, 50W MAX.
 <p>Art Deco Gimbal Ring for Halogen MR16 BiPin</p>	ET502W	White, 12V, 50W MAX.
	ET502B	Black, 12V, 50W MAX.
 <p>Gimbal Ring for Halogen MR16 BiPin</p>	ET507B	Black, 12V, 50W MAX.
 <p>Low Voltage Zeppelin™ MR16 BiPin</p>	ET526W	White, 12V, 50W MAX.
	ET526B	Black, 12V, 50W MAX.
	ET526-75W	White, 12V, 75W MAX.
	ET526-75B	Black, 12V, 75W MAX.
 <p>Low Voltage Cylinder MR16 BiPin</p>	ET528W	White, 12V, 50W MAX.
	ET528B	Black, 12V, 50W MAX.
	ET528G	Gold, 12V, 50W MAX.
	ET528N	Nickel, 12V, 50W MAX.
	ET528BZ	Bronze, 12V, 50W MAX.
	ET528CP	Copper, 12V, 50W MAX.
	ET528-75W	White, 12V, 75W MAX.
ET528-75B	Black, 12V, 75W MAX.	
 <p>Low Voltage Anchor™ MR16 BiPin</p>	ET530W	White/Black Baffle, 120V, 50W MAX.
	ET530B	Black, 120V, 50W MAX.
	ET530WW	All White, 120V, 50W MAX.
 <p>Low Voltage Step Cylinder MR16 BiPin</p>	ET531B	Black, 12V, 42/50W MAX.

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip




MR16 Low Voltage Track Heads for Halogen Lamps

Description	CAT. #	Specs
 <p>Low Voltage Hoxton™ MR16 BiPin</p>	ET532W	White, 12V, 50W MAX.
	ET532B	Black, 12V, 50W MAX.
	ET532-75W	White, 12V, 75W MAX.
	ET532-75B	Black, 12V, 75W MAX.
 <p>Low Voltage Clasp MR16 BiPin</p>	ET534W	White, 12V, 50W MAX.
	ET534B	Black, 12V, 50W MAX.
	ET534-75W	White, 12V, 75W MAX.
	ET534-75B	Black, 12V, 75W MAX.
 <p>Low Voltage Louver MR16 BiPin</p>	ET537B	Black, 12V, 50W MAX.
 <p>Low Voltage Contempo MR16 BiPin</p>	ET549B	Black, 12V, 42W/50W MAX.
 <p>Low Voltage Clasp Globe MR16 BiPin</p>	ET551W-YL	White/Yellow Glass, 12V, 50W MAX.
	ET551B-BL	Black/Blue Glass, 12V, 75W MAX.
 <p>Low Voltage Studio MR16 BiPin</p>	ET558W	White, 12V, 50W MAX.
	ET558B	Black, 12V, 50W MAX.

For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip




MR16 Low Voltage Track Heads for Halogen Lamps

Description	CAT. #	Specs
 Low Voltage Micro Style MR16 BiPin	ET559B	Black, 12V, 50W MAX.
 Low Voltage Vertical Gimbal MR16 BiPin	ET562W	White, 12V, 50W MAX.
	ET562B	Black, 12V, 50W MAX.
 Low Voltage Vertical Spot MR16 BiPin	ET563W	White, 12V, 50W MAX.
 Low Voltage High Tech Gimbal PAR36	ET565W	White, 12V, 50W MAX.
 Low Voltage High Tech Gimbal AR111	ET570W	White, 12V, 50W MAX.
 Low Voltage Monopoint MR16 BiPin	ET1528W	White, 12V, 50W MAX.
	ET1528B	Black, 12V, 50W MAX.
	ET1528BZ	Bronze, 12V, 75W MAX.
	ET1528N	Nickel, 12V, 75W MAX.
 Low Voltage Builder's Track Kit MR16 BiPin Kit Includes: (1) 4' Track, (1) Floating Canopy, (3) Low Voltage Track Heads. Lamp not included	ET566W	White, 12V, 50W MAX.
	ET567W	White, 12V, 50W MAX.
	ET567B	Black, 12V, 50W MAX.
	ET568W	White, 12V, 50W MAX.






For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip




MR16 Low Voltage Track Heads with Stem Extensions

Description	CAT. #	Specs
 <p>Low Voltage Gimbal Ring MR16 BiPin</p>	ET526-12W	12", White, 12V, 50W
	ET526-12B	12", Black, 12V, 50W
	ET526-18W	18", White, 12V, 50W
	ET526-18B	18", Black, 12V, 50W
	ET526-24W	24", White, 12V, 50W
	ET526-24B	24", Black, 12V, 50W
	ET526-36W	36", White, 12V, 50W
	ET526-36B	36", Black, 12V, 50W
	ET526-48W	48", White, 12V, 50W
	ET526-48B	48", Black, 12V, 50W
 <p>Low Voltage Cylinder MR16 BiPin</p>	ET528-12W	12", White, 12V, 50W
	ET528-12B	12", Black, 12V, 50W
	ET528-18W	18", White, 12V, 50W
	ET528-18B	18", Black, 12V, 50W
	ET528-24W	24", White, 12V, 50W
	ET528-24B	24", Black, 12V, 50W
	ET528-36W	36", White, 12V, 50W
	ET528-36B	36", Black, 12V, 50W
	ET528-48W	48", White, 12V, 50W
	ET528-48B	48", Black, 12V, 50W
 <p>Low Voltage Roundback MR16 BiPin</p>	ET530-12W	12", White, 12V, 50W
	ET530-12B	12", Black, 12V, 50W
	ET530-18W	18", White, 12V, 50W
	ET530-18B	18", Black, 12V, 50W
	ET530-24W	24", White, 12V, 50W
	ET530-24B	24", Black, 12V, 50W
	ET530-36W	36", White, 12V, 50W
	ET530-36B	36", Black, 12V, 50W
	ET530-48W	48", White, 12V, 50W
	ET530-48B	48", Black, 12V, 50W
 <p>Low Voltage Soft Square MR16 BiPin</p>	ET532-12W	12", White, 12V, 50W
	ET532-12B	12", Black, 12V, 50W
	ET532-18W	18", White, 12V, 50W
	ET532-18B	18", Black, 12V, 50W
	ET532-24W	24", White, 12V, 50W
	ET532-24B	24", Black, 12V, 50W
	ET532-36W	36", White, 12V, 50W
	ET532-36B	36", Black, 12V, 50W
	ET532-48W	48", White, 12V, 50W
	ET532-48B	48", Black, 12V, 50W
 <p>Low Voltage Clasp MR16 BiPin</p>	ET534-12W	12", White, 12V, 50W
	ET534-12B	12", Black, 12V, 50W
	ET534-18W	18", White, 12V, 50W
	ET534-18B	18", Black, 12V, 50W
	ET534-24W	24", White, 12V, 50W
	ET534-24B	24", Black, 12V, 50W
	ET534-36W	36", White, 12V, 50W
	ET534-36B	36", Black, 12V, 50W
	ET534-48W	48", White, 12V, 50W
	ET534-48B	48", Black, 12V, 50W



For our full line of Track and Track accessories visit elcolighting.com

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip




MR16 Low Voltage Track Heads with Stem Extensions

Description	CAT. #	Specs
 <p>Low Voltage Studio MR16 BiPin</p>	ET558-12W	12", White, 12V, 50W
	ET558-12B	12", Black, 12V, 50W
	ET558-18W	18", White, 12V, 50W
	ET558-18B	18", Black, 12V, 50W
	ET558-24B	24", Black, 12V, 50W
	ET558-36W	36", White, 12V, 50W
	ET558-36B	36", Black, 12V, 50W
	ET558-48B	48", Black, 12V, 50W
 <p>Low Voltage Gimbal Ring PAR36</p>	ET565-12W	12", White, 12V, 50W
	ET565-18W	18", White, 12V, 50W
	ET565-24W	24", White, 12V, 50W
	ET565-36W	36", White, 12V, 50W
	ET565-48W	48", White, 12V, 50W












For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip




MR16 GU10 Line Voltage Track Heads

Description	CAT. #	Specs
 Swivel™ GU10 MR16	ET1604W	White
 Savoy™ GU10 MR16	ET1625B	Black
 Bowen™ GU10 MR16	ET1626W	White
	ET1626B	Black
	ET1626N	Nickel
 Garda™ GU10 MR16	ET1628W	White
	ET1628B	Black
	ET1628BZ	Bronze
	ET1628N	Nickel
 Arbor™ GU10 MR16	ET1630W	White/ Black Baffle
	ET1630B	Black
	ET1630WW	All White
 Crown™ GU10 MR16	ET1632W	White
	ET1632B	Black
 Basket™ GU10 MR16	ET1634N	Nickel
	ET1634B	Black
 Knute™ GU10 MR16	ET1687N	Nickel
 Monopoint GU10 MR16	ET1728W	White
	ET1728B	Black
 120V 50W Halogen MR16 GU10 Lamp	MR120-GU10	50W
 LED 120V 7W Halogen MR16 GU10 Lamp	MR120-GU10LD	7W, 500 lm, 3000K








For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip




120V Line Voltage Track Fixtures

Description	CAT. #	Specs
 Gimbal Ring	ET629W	White, 120V, 50W
	ET629B	Black, 120V, 50W
 Gimbal Ring	ET630W	White, 120V, 75W
	ET630B	Black, 120V, 75W
 Gimbal Ring PAR38	ET631W	White, 120V, 150W
	ET631B	Black, 120V, 150W
 Flat Back Cylinder with Baffle	ET634W	All White, 120V, 50W
	ET634B	All Black, 120V, 50W
	ET634WW	White/Black Baffle, 120V, 50W
 Flat Back Cylinder with Baffle	ET635W	All White, 120V, 75W
	ET635B	All Black, 120V, 75W
	ET635WW	White/Black Baffle, 120V, 75W
 Step Cylinder with Baffle	ET636W	White/Black Baffle, 120V, 50W
	ET636B	All Black, 120V, 50W
	ET636WW	All White, 120V, 50W
 Step Cylinder with Baffle	ET637W	White/Black Baffle, 120V, 75W
	ET637B	All Black, 120V, 75W
	ET637WW	All White, 120V, 75W








For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip




120V Line Voltage Track Fixtures

Description	CAT. #	Specs
 <p>Roundback Cylinder with Baffle</p>	ET639W	White/Black Baffle, 120V, 75W
	ET639WW	All White, 120V, 75W
 <p>Universal Track Fixture L x W: 5 3/4" x 2"</p>	ET641W	White, 120V, Up to 150W
	ET641B	Black, 120V, Up to 150W
 <p>Universal Track Fixture L x W: 4 1/2" x 2"</p>	ET642W	White, 120V, 150W
	ET642B	Black, 120V, 150W
 <p>Mini Universal R or PAR Type</p>	ET647W	White, 120V, 75W MAX.
	ET647B	Black, 120V, 75W MAX.
	ET647BZ	Bronze, 120V, 75W MAX.
 <p>Flat Back Cylinder with Black or White Coilex Baffle</p>	ET650W	White w/Black Baffle, 120V, 150W
	ET650B	All Black, 120V, 150W
	ET650WW	All White, 120V, 150W
 <p>Lumina Wire Form PAR38</p>	ET654BZ	Bronze, 120V, 150W MAX.
 <p>Solid PAR20 Classic</p>	ET657W	White, 120V, 50W
	ET657B	Black, 120V, 50W







For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightlier Tip




120V Line Voltage Track Fixtures

Description	CAT. #	Specs
 <p>Solid PAR30 Classic</p>	ET658W	White, 120V, 75W
	ET658B	Black, 120V, 75W
	ET658BZ	Bronze, 120V, 75W
 <p>Solid PAR Classic</p>	ET659W	White, 120V, 150W
	ET659B	Black, 120V, 150W
	ET659BZ	Bronze, 120V, 150W
 <p>Wall Wash with Louver</p>	ET660B	Black, 120V, 150W - 300W
 <p>Yoke mounted Roundback Cylinder PAR30</p>	ET662B	Black, 120V, 75W
 <p>Round Back Cylinder with Gold Ring PAR30</p>	ET671W	White, 120V, 75W
 <p>Front Loading Adjustable Gimbal PAR30</p>	ET686W	White, 120V, 75W
	ET686B	Black, 120V, 75W







For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



120V Line Voltage Track Fixtures

Description	CAT. #	Specs
 <p>Front Loading Adjustable Gimbal PAR38</p>	ET687W	White, 120V, 150W
	ET687B	Black, 120V, 150W
 <p>Mini Universal 1/2" Yoke</p>	ET690W	White, 120V, 50W or 150W
	ET690B	Black, 120V, 50W or 150W
 <p>Par Classic PAR20</p>	ET694C	Clear, 120V, 50W
	ET694G	Gold, 120V, 50W
 <p>Par Classic PAR30</p>	ET695G	Gold, 120V, 75W
 <p>Par Classic PAR38</p>	ET696C	Clear, 120V, 150W
	ET696G	Gold, 120V, 150W
 <p>CFL Solid Cone with Clear Reflector</p>	ET1158W	White, 120V, 26W MAX.





For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Track Heads

All Track fixtures can be used with 120V Single or Two Circuit Track
 J & L Style Available - PJTLO (W), (B) for Juno Tip or PLTHI (W) (B) for Lightolier Tip



120V Line Voltage Track Fixtures

Description	CAT. #	Specs
 <p>Builder's Track Kit Package Includes: (3) ET637 Step Cylinder (1) 4' Track (1) Floating Canopy</p>	ET665W	White, 120V, 75W
	ET665B	Black, 120V, 75W
 <p>Builder's Track Kit Package Includes: (3) ET635 Flat Back (1) 4' Track (1) Floating Canopy</p>	ET666W	White, 120V, 75W
	ET666B	Black, 120V, 75W
 <p>Builder's Track Kit Package Includes: (3) ET639 Roundback (1) 4' Track (1) Floating Canopy</p>	ET667W	White, 120V, 75W
 <p>Builder's Track Kit Package Includes: (3) ET630 Gimbal Ring (1) 4' Track (1) Floating Canopy</p>	ET699W	White, 120V, 75W
	ET699B	Black, 120V, 75W



For our full line of Track and Track accessories [visit elcolighting.com](http://www.elcolighting.com)

Single & Two **Circuit Track and Accessories**












Full line of Accessories for Track Heads



Single Circuit Track *supplied with dead end and mounting hardware*

Description	CAT. #	Specs
 <p>Single Circuit Track Available in White (W), Black (B), Bronze (BZ) & Nickel (N) 12' available only in White and Black</p>	EP002 (W) (B) (BZ) (N)	2', 120V
	EP004 (W) (B) (BZ) (N)	4', 120V
	EP006 (W) (B) (BZ) (N)	6', 120V
	EP008 (W) (B) (BZ) (N)	8', 120V
	EP012 (W) (B)	12', 120V
 <p>12' Track Kit Kit Includes: (2) Single Track (EP006) & Mini Connector Track (EP808) Available in White (W), Black (B), Bronze (BZ) & Nickel (N)</p>	EP12X (W) (B) (BZ) (N)	(2) 6' Single Tracks, (1) Mini Connector, 120V

Single Circuit Track Accessories

Description	CAT. #	Specs
 <p>Live End Connector Used for direct wiring.</p>	EP801W	White
	EP801B	Black
	EP801BZ	Bronze
	EP801N	Nickel
 <p>Flexible Connector To join two track sections at an angle up to 90°. Can be used as a feed point</p>	EP802W	White
	EP802B	Black
	EP802BZ	Bronze
	EP802N	Nickel
 <p>Straight Connector Power feedable connector to join two track sections</p>	EP803W	White
	EP803B	Black
	EP803BZ	Bronze
	EP803N	Nickel
 <p>L Connector Power feedable connector to join two track sections at a 90°</p>	EP804W	White
	EP804B	Black
	EP804BZ	Bronze
	EP804N	Nickel
 <p>T Connector Power feedable connector to join three track sections</p>	EP805W	White
	EP805B	Black
	EP805BZ	Bronze
 <p>X Connector Power feedable connector to join four track sections</p>	EP806W	White
	EP806B	Black
	EP806BZ	Bronze
 <p>Mini Connector To join two track sections. Cannot be used as a feed point</p>	EP808W	White
	EP808B	Black
	EP808BZ	Bronze
 <p>Floating Canopy Can be used anywhere along length of track to supply power. Includes end cap</p>	EP809W	White
	EP809B	Black
	EP809BZ	Bronze
	EP809N	Nickel
 <p>End Feed Kit Includes live end feed and canopy to mount on outlet box</p>	EP810W	White
	EP810B	Black
	EP810BZ	Bronze
	EP810N	Nickel
 <p>Dead End Dead end cap for single and two circuit track</p>	EP812W	White
	EP812B	Black
	EP812BZ	Bronze
	EP812N	Nickel
 <p>T-Bar Ceiling Feed Live feed with outlet box for use with T-bar ceilings</p>	EP817W	White
	EP817B	Black
	EP817BZ	Bronze
	EP817N	Nickel








For our full line of Track and Track accessories visit elcolighting.com

Single & Two Circuit Track and Accessories

Full line of Accessories for Track Heads



Single Circuit Track Accessories

Description	CAT. #	Specs
 <p>Dead Mini Connector Dead Mini Connector to join two track sections without passing the power</p>	EP825W	White
	EP825B	Black
	EP825BZ	Bronze
	EP825N	Nickel
 <p>T-Bar Ceiling Feed In-line T-bar ceiling feed. Available in White and Black Only</p>	EP827W	White
	EP827B	Black
 <p>Cord and Plug Connector For single circuit track. 10 Amp MAX. or 1200W. 12 ft. long</p>	EP850W	White
	EP850B	Black
	EP850BZ	Bronze
	EP850N	Nickel
 <p>Conduit Connector To start a surface run</p>	EP880W	White
	EP880B	Black
	EP880BZ	Bronze
 <p>Conduit Continuation Kit Kit includes: (1) left and (1) right feed, to continue around obstructions with 1/2" surface conduit</p>	EP979W	White
	EP979B	Black
 <p>Live Feed with Current Limiter For single circuit track. 1A to 12A available</p>	EP840W-1A	White, 1 Amp
	EP840B-1A	Black, 1 Amp
	EP840BZ-1A	Bronze, 1 Amp
	EP840W-2A	White, 2.5 Amp
	EP840B-2A	Black, 2.5 Amp
	EP840BZ-2A	Bronze, 2.5 Amp
	EP840W-3A	White, 3 Amp
	EP840B-3A	Black, 3 Amp
	EP840BZ-3A	Bronze, 3 Amp
	EP840W-4A	White, 4 Amp
	EP840B-4A	Black, 4 Amp
	EP840BZ-4A	Bronze, 4 Amp
	EP840W-5A	White, 5 Amp
	EP840B-5A	Black, 5 Amp
	EP840BZ-5A	Bronze, 5 Amp
	EP840W-7A	White, 7 Amp
	EP840B-7A	Black, 7 Amp
	EP840BZ-7A	Bronze, 7 Amp
	EP840W-10A	White, 10 Amp
	EP840B-10A	Black, 10 Amp
EP840BZ-10A	Bronze, 10 Amp	
EP840W-12A	White, 12 Amp	
EP840B-12A	Black, 12 Amp	
EP840BZ-12A	Bronze, 12 Amp	
 <p>In-Line Feed Connector with Current Limiter For single circuit track. 1A to 12A available. Available in White & Black</p>	EP841W-1A	White, 1 Amp
	EP841B-1A	Black, 1 Amp
	EP841W-2A	White, 2.5 Amp
	EP841B-2A	Black, 2.5 Amp
	EP841W-3A	White, 3 Amp
	EP841B-3A	Black, 3 Amp
	EP841W-4A	White, 4 Amp
	EP841B-4A	Black, 4 Amp
	EP841W-5A	White, 5 Amp
	EP841B-5A	Black, 5 Amp
	EP841W-7A	White, 7 Amp
	EP841B-7A	Black, 7 Amp
EP841W-10A	White, 10 Amp	
EP841B-10A	Black, 10 Amp	
EP841B-12A	White, 12 Amp	
EP841BZ-12A	Black, 12 Amp	

Single & Two Circuit Track and Accessories

Full line of Accessories for Track Heads



Two Circuit Track Accessories

Description	CAT. #	Specs
 <p>Two Circuit Track Track supplied with dead end and mounting hardware</p>	EC002W	White, 2'
	EC002B	Black, 2'
	EC004W	White, 4'
	EC004B	Black, 4'
	EC006W	White, 6'
	EC006B	Black, 6'
	EC008W	White, 8'
	EC008B	Black, 8'
 <p>Live End Connector Two Circuit live end connector to start a run</p>	EC801W	White
	EC801B	Black
 <p>Flexible Connector Power feedable connector to join two track sections up to 90° angle</p>	EC802W	White
	EC802B	Black
 <p>Straight Connector Power feedable connector to join two track sections</p>	EC803W	White
	EC803B	Black
 <p>L Connector Power feedable connector to join two track sections at a 90° angle</p>	EC804W	White
	EC804B	Black
 <p>T Connector Power feedable connector to join three track sections</p>	EC805W	White
	EC805B	Black
 <p>X Connector Power feedable connector to join four track sections</p>	EC806W	White
	EC806B	Black
 <p>Mini Connector To join two track sections. Cannot be used as a feed point</p>	EC808W	White
	EC808B	Black
 <p>Floating Canopy Can be used anywhere along length of track to supply power. Includes end cap.</p>	EC809W	White
	EC809B	Black
 <p>Dead End Dead End Cap for single and two circuit track.</p>	EP812W	White
	EP812B	Black
 <p>Conduit Connector To start a surface run.</p>	EC880W	White
	EC880B	Black
 <p>T-Bar Ceiling Feed Live feed with outlet box for use with T-bar ceilings.</p>	EC817W	White
	EC817B	Black
 <p>Two Circuit Live-End Feed Connector with Current Limiter 1A to 12A available. Separate circuit breaker for each circuit.</p>	EC840W	See PNB Below
	EC840B	See PNB Below
 <p>Two Circuit In-Line Feed Connector with Current Limiter 1A to 12A available. Separate circuit breaker for each circuit.</p>	EC841W	See PNB Below
	EC841B	See PNB Below

Product Number Builder	ELCO 2 Circuit	Feed	Finish	Circuit 1	Circuit 2
	EC				
	840	Live-End Feed	W White	1A 1 Amp	1A 1 Amp
	841	In-Line Feed	B Black	2A 2.5 Amp	2A 2.5 Amp
				3A 3 Amp	3A 3 Amp
				4A 4 Amp	4A 4 Amp
				5A 5 Amp	5A 5 Amp
				7A 7 Amp	7A 7 Amp
				10A 10 Amp	10A 10 Amp
				12A 12.5 Amp	12A 12.5 Amp

Example: **EC841B2A12A** [ELCO 2 Circuit In-Line Feed, Black, 2.5 Amp, 12.5 Amp]




Custom Current Rating available upon request. Separate Circuit Breaker for each circuit.

Track Accessories

Full line of Accessories for Track Heads



General Track Accessories













Description	CAT. #	Specs
 Louver For Par30 ET630	EP222W	White
	EP222B	Black
 Accessory Baffle	EP300W	White
	EP300B	Black
 Honey Comb for ET622, ET623 & ET624	EP322W	White, for ET622
	EP322B	Black, for ET622
	EP323W	White, for ET623
	EP323B	Black, for ET623
	EP324W	White, for ET624
EP324B	Black, for ET624	
 Louver for ET616 & EDL80 Series	EP325B	Black, for ET616 & EDL80
 Louver for ET633 & ET631	EP333W	White
 Louver for ET640 & ET650	EP444W	White
	EP444B	Black
 Barn Door Shutter	EP422W	White, for ET640 & ET650
	EP422B	Black, for ET640 & ET650
	EP820W	White, for ET547 & ET62830
	EP820B	Black, for ET547 & ET62830
	EP822W	White, for ET631, ET635, ET637, ET639 & ET644
 Monopoint with with Low Voltage Transformer For use with TRACK 22 low voltage track heads	EP702W	White, 75W, 12V
	EP702B	Black, 75W, 12V
 Outlet Box Cover	EP800W	White
	EP800B	Black
	EP800BZ	Bronze
 Monopoint Canopy For Line Voltage fixtures	EP811W	White
	EP811B	Black
	EP811BZ	Bronze
	EP811N	Nickel
 Outlet Adapter	EP814W	White
	EP814B	Black
	EP814BZ	Bronze
	EP814N	Nickel
 Pendant Fixture Adapter Holds up to 35lbs	EP815W	White
	EP815B	Black
	EP815N	Nickel
 Monopoint Canopy For Low Voltage With transformer box	EP816W	White
	EP816B	Black
	EP816BZ	Bronze
	EP816N	Nickel
 Round Monopoint Canopy For Line Voltage Fixtures	EP819W	White
	EP819B	Black
	EP819BZ	Bronze
 Framing Projector for use with ET547 & ET62830	EP821B	Black

Track Accessories

Full line of Accessories for Track Heads




General Track Accessories












Description	CAT. #	Specs
 Straight Channel	EP844W	White
	EP844B	Black
 "L" Channel	EP845W	White
	EP845B	Black
 Dimmer Switch. For Line Voltage Fixtures. 150W MAX.	EP901W	White
	EP901B	Black
 Clamp with 6' Cord and Plug	EP903W	White
 48" Steel Stem	EP904W	White
	EP904B	Black
 Sloped Ceiling Pendant Adapter For Use with EP918, EP924, EP936 & EP948	EP905W	White
	EP905B	Black
 T-Bar Attachment Clip	EP989B	Nickel / Steel
 Sloped Ceiling Pendant Adapter	EP906W	White
	EP906B	Black
 Track Pendant Kit with 60" stainless steel cable	EP960W	White
	EP960B	Black
 Pendant Assembly	EP918W	White, 18"
	EP918B	Black, 18"
	EP924W	White, 24"
	EP924B	Black, 24"
	EP936W	White, 36"
	EP936B	Black, 36"
	EP948W	White, 48"
	EP948B	Black, 48"
 Wire Cover Power feed-through with Pendant Assembly	EP807W	White
	EP807B	Black
	EP807BZ	Bronze
	EP807N	Nickel
 Extension Stem Track Accessory	EP882B	Black, 12"
	EP818B	Black, 18"
	EP824W	White, 24"
	EP824B	Black, 24"
	EP836W	White, 36"
	EP836B	Black, 36"
	EP848W	White, 48"
	EP848B	Black, 48"

Pendant Lighting

Flat Canopy included




LED Pendants





Description	CAT. #	Specs
 <p>LED Bale™ Glass Pendants</p>	EDL60N-FR	Frost, 5W, 300 lm, 3000K
	EDL60N-MA	Mars, 5W, 300 lm, 3000K
	EDL60N-AU	Autum, 5W, 300 lm, 3000K
 <p>LED Blake™ Glass Pendants</p>	EDL61N-AT	Athena, 5W, 300 lm, 3000K
	EDL61N-FR	Frost, 5W, 300 lm, 3000K
	EDL61N-MA	Mars, 5W, 300 lm, 3000K
 <p>LED Becket™ Glass Pendants</p>	EDL62N-AT	Athena, 5W, 300 lm, 3000K
	EDL62N-AU	Autum, 5W, 300 lm, 3000K
 <p>LED Barrel™ Glass Pendants</p>	EDL63N-CO	Cobalt, 5W, 300 lm, 3000K
	EDL63N-AU	Autum, 5W, 300 lm, 3000K
 <p>LED Bait™ (2" x 8") Die-Cast Aluminum Pendants</p>	EDL8030W	White, 10W, 700 lm, 3000K
	EDL8030B	Black, 10W 700 lm, 3000K
	EDL8040W	White, 10W, 750 lm, 4000K
	EDL8040B	Black, 10W, 750 lm, 4000K
 <p>LED Bait™ (3" x 8") Die-Cast Aluminum Pendants</p>	EDL8130W	White, 18W, 1490 lm, 3000K
	EDL8130B	Black, 18W, 1490 lm, 3000K
	EDL8140W	White, 18W, 1610 lm, 4000K
	 EDL81CT3W White, 18W, 1490 lm, 3000K, 3500K, 4000K	
 <p>LED Bait™ (3" x 10") Die-Cast Aluminum Pendants</p>	EDL82CT3W	White, 30W, 1920 lm, 3000K, 3500K, 4000K
	 EDL82CT3B Black, 30W, 1920 lm, 3000K, 3500K, 4000K	
 <p>LED Bait™ (4" x 10") Die-Cast Aluminum Pendants</p>	EDL83CT3W	White, 40W, 2690 lm, 3000K, 3500K, 4000K
	 EDL83CT3B Black, 40W, 2690 lm, 3000K, 3500K, 4000K	
 <p>Optional Steel Wire Cover for LED Die-Cast Pendants</p>	EP883W	White, 24" L x 3/8" O.D.
	EP883B	Black, 24" L x 3/8" O.D.
	EP884W	White, 48" L x 3/8" O.D.
	EP884B	Black, 48" L x 3/8" O.D.
	EP885W	White, 72" L x 3/8" O.D.
	EP885B	Black, 72" L x 3/8" O.D.

Pendant Lighting



Combine with Line Voltage Monopoint Canopy or Track Connector







Line Voltage Pendants

Description	CAT. #	Specs
 Line Voltage Bale™ Glass Pendants	E10FR	Frost, 60W, 120V
	E10MA	Mars, 60W, 120V
	E10AU	Autum, 60W, 120V
 Line Voltage Blake™ Glass Pendants	E11AT	Athena, 60W, 120V
	E11MA	Mars, 60W, 120V
	E11AU	Autum, 60W, 120V
 Line Voltage Becket™ Glass Pendants	E12AT	Athena, 60W, 120V
	E12AU	Autum, 60W, 120V
 Line Voltage Barrel™ Glass Pendants	E13CO	Cobalt, 60W, Candelabra lamp
	E13AU	Autum, 60W, Candelabra lamp

Line Voltage Pendant Accessories


Description	CAT. #	Specs
 Line Voltage Monopoint Canopy for Pendants	ECTW	White
	ECTB	Black
	ECTN	Nickel
 Line Voltage 1 or 2 Circuit Track Connector	ETTW	White
	ETTB	Black
	ETTN	Nickel

Low Voltage Pendants






Description	CAT. #	Specs	Dist. Net
 Low Voltage Bale™ Glass Pendants	E20FR	Frost, 50W, 12V	
	E20MA	Mars, 50W, 12V	
	E20AU	Autum, 50W, 12V	
 Low Voltage Blake™ Glass Pendants	E21AT	Athena, 50W, 12V	
	E21FR	Frost, 50W, 12V	
	E21MA	Mars, 50W, 12V	
	E21AU	Autum, 50W, 12V	
 Low Voltage Becket™ Glass Pendants	E22AT	Athena, 50W, 12V	
	E22AU	Autum, 50W, 12V	
 Low Voltage Barrel™ Glass Pendants	E23CO	Cobalt, 50W, 12V	
	E23FR	Frost, 50W, 12V	
	E23AU	Autum, 50W, 12V	


Pendant Lighting

Combine with Line Voltage Monopoint Canopy or Track Connector



Low Voltage Pendant Accessories

Description	CAT. #	Specs
 50W Track Transformer	ELWW	White
	ELWB	Black
	ELWN	Nickel
 50W Vertical Track Transformer	ETVW	White
	ETVB	Black
	ETVN	Nickel
 50W Semicircular Canopy	ECLW	White
	ECLB	Black
	ECLN	Nickel
 50W Flat Canopy	ECFW	White
	ECFB	Black
	ECFN	Nickel
 Mini Track Adapter	EP2015B	Black

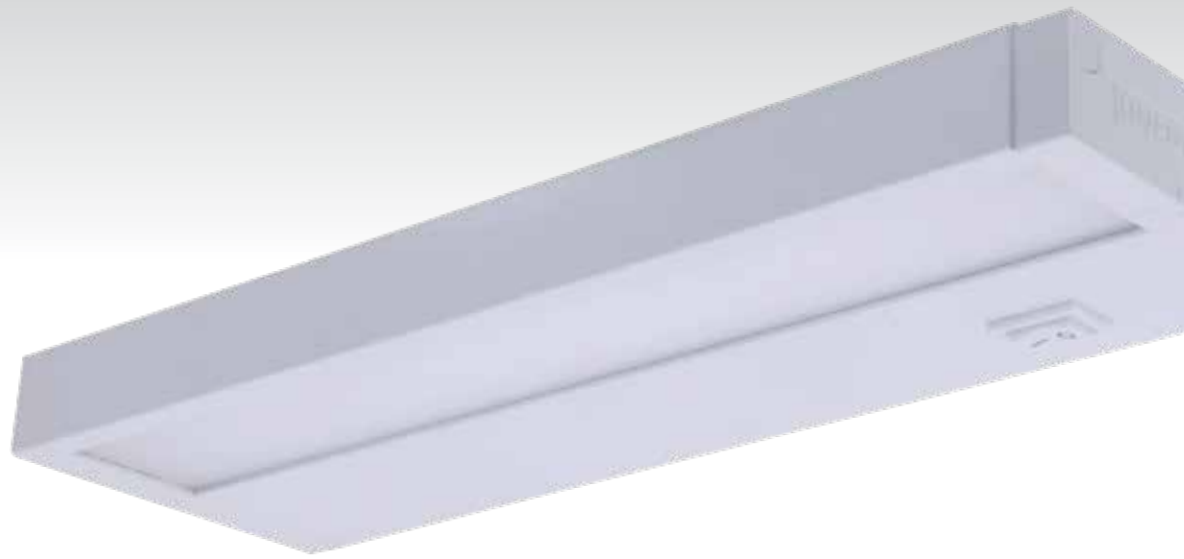


LED Undercabinet & Puck Lights







Lotus™ LED Undercabinet	168
Zinnia™ LED Undercabinet	169
Sage™ LED Undercabinet Lightbar	170
Flax™ LED Adjustable Undercabinet	170
Azalea™ LED Undercabinet	171
Tansy™ LED Undercabinet	171
Ixia™ 24V DC LED Undercabinet	171
LED Undercabinet Lightbars	172

12V Puck Lights & Accessories	173
24V Dimmers, 12V & 24V DC Drivers	174
T5 Fluorescent Undercabinet Light	174





LED Undercabinet and Pucks




Lotus™ LED Undercabinet

Description	CAT. #	Specs
 <p>120V LED Undercabinet with CCT Switch</p> 	EUB11CT5W	White, 11", 5.5W, 350 lm, 2700K - 5000K
	EUB12L30W	White, 12", 6W, 400 lm, 3-CCT
	EUB12CT5W	White, 12", 6W, 400 lm, 2700K - 5000K
	EUB14L30W	White, 14", 7W, 480 lm, 3-CCT
	EUB18CT5W	White, 18", 9.2W, 650 lm, 2700K - 5000K
	EUB22CT5W	White, 22", 10.5W, 700 lm, 2700K - 5000K
	EUB29CT5W	White, 29", 12.2W, 900 lm, 2700K - 5000K
	EUB32CT5W	White, 32", 14W, 1000 lm, 2700K - 5000K
	EUB36CT5W	White, 36", 15.3W, 1150 lm, 2700K - 5000K
	EUB48CT5W	White, 48", 19.5W, 1450 lm, 2700K - 5000K
 <p>120V LED Undercabinet</p>	EUB11L30BZ	Bronze, 11", 5.5W, 350 lm, 3000K
	EUB11L40BZ	Bronze, 11", 5.5W, 350 lm, 4000K
	EUB12L30BZ	Bronze, 12", 6W, 400 lm, 3000K
	EUB14L30BZ	Bronze, 14", 7W, 480 lm, 3000K
	EUB14L40BZ	Bronze, 14", 7W, 480 lm, 4000K
	EUB18L30BZ	Bronze, 18", 9.2W, 650 lm, 3000K
	EUB22L40BZ	Bronze, 22", 9.6W, 700 lm, 4000K
	EUB29L30BZ	Bronze, 29", 12.2W, 900 lm, 3000K
	EUB29L40BZ	Bronze, 29", 12.2W, 900 lm, 4000K
	EUB36L30BZ	Bronze, 36", 15.3W, 1150 lm, 3000K
EUB36L40BZ	Bronze, 36", 15.3W, 1150 lm, 4000K	
EUB48L30BZ	Bronze, 48", 19.5W, 1450 lm, 3000K	
EUB48L40BZ	Bronze, 48", 19.5W, 1450 lm, 4000K	
 <p>Linking Connectors</p>	EUBC03	3" Length
	EUBC06	6" Length
	EUBC12	12" Length
	EUBC24	24" Length
 <p>5' Power Cord</p>	EUBCRD	5' Length
 <p>Jbox for hard wire connection</p>	EUBJBX	White
	EUBJBXBZ	Bronze

Lotus II™ G2 LED Undercabinet Light

Description	CAT. #	Specs
 <p>120V LED Undercabinet Individually switch with pass-through power. 2700K/3000K/3500K (CCT Switch)</p> 	EU3T08W	8", 6W, 360 lm, 2700K, 3000K, 3500K
	EU3T12W	12", 8W, 485 lm, 2700K, 3000K, 3500K
	EU3T16W	16", 10W, 610 lm, 2700K, 3000K, 3500K
	EU3T24W	24", 14W, 850 lm, 2700K, 3000K, 3500K
	EU3T32W	32", 18W, 1100 lm, 2700K, 3000K, 3500K
 <p>6" Extension Cable</p>	EU3TC6	6" Length
 <p>5' Power Cable</p>	EU3TPC	5' Length


LED Undercabinet and Pucks




Zinnia™ LED Undercabinet Bar

Description	CAT. #	Specs
 <p>120V Zinnia™ LED Undercabinet Bar White (W) and Bronze (BZ)</p>	EUM41W	White, 12 ¼", 5W, 450 lm, 3000K
	EUM42W	White, 21", 9W, 800 lm, 3000K
	EUM43W	White, 24 ¼", 10W, 900 lm, 3000K
	EUM44W	White, 33 ¼", 15W, 1350 lm, 3000K
	EUM45W	White, 42 ¼", 20W, 1800 lm, 3000K
	EUM41BZ	Bronze, 12 ¼", 5W, 450 lm, 3000K
	EUM42BZ	Bronze, 21", 9W, 800 lm, 3000K
	EUM43BZ	Bronze, 24 ¼", 10W, 900 lm, 3000K
	EUM44BZ	Bronze, 33 ¼", 15W, 1350 lm, 3000K
	EUM45BZ	Bronze, 42 ¼", 20W, 1800 lm, 3000K

0-10V Zinnia™ LED Undercabinet Bar

Description	CAT. #	Specs	
 <p>0-10V 120V Zinnia™ LED Undercabinet Bar White (W) and Bronze (BZ)</p>	EUM41DXW	White, 12 ¼", 5W, 450 lm, 3000K, 120V	
	EUM42DXW	White, 21", 9W, 800 lm, 3000K, 120V	
	EUM43DXW	White, 24 ¼", 10W, 900 lm, 3000K, 120V	
	EUM44DXW	White, 33 ¼", 15W, 1350 lm, 3000K, 120V	
	EUM45DXW	White, 42 ¼", 20W, 1800 lm, 3000K, 120V	
	EUM41DXBZ	Bronze, 12 ¼", 5W, 450 lm, 3000K, 120V	
	EUM42DXBZ	Bronze, 21", 9W, 800 lm, 3000K, 120V	
	EUM43DXBZ	Bronze, 24 ¼", 10W, 900 lm, 3000K, 120V	
	EUM44DXBZ	Bronze, 33 ¼", 15W, 1350 lm, 3000K, 120V	
	EUM45DXBZ	Bronze, 42 ¼", 20W, 1800 lm, 3000K, 120V	
	<p>0-10V 277V Zinnia™ LED Undercabinet Bar White (W) and Bronze (BZ)</p>	EUM41DXW-7	White, 12 ¼", 5W, 450 lm, 3000K, 277V
		EUM42DXW-7	White, 21", 9W, 800 lm, 3000K, 277V
		EUM43DXW-7	White, 24 ¼", 10W, 900 lm, 3000K, 277V
		EUM44DXW-7	White, 33 ¼", 15W, 1350 lm, 3000K, 277V
		EUM45DXW-7	White, 42 ¼", 20W, 1800 lm, 3000K, 277V
EUM41DXBZ-7		Bronze, 12 ¼", 5W, 450 lm, 3000K, 277V	
EUM42DXBZ-7		Bronze, 21", 9W, 800 lm, 3000K, 277V	
EUM43DXBZ-7		Bronze, 24 ¼", 10W, 900 lm, 3000K, 277V	
EUM44DXBZ-7		Bronze, 33 ¼", 15W, 1350 lm, 3000K, 277V	
EUM45DXBZ-7		Bronze, 42 ¼", 20W, 1800 lm, 3000K, 277V	

LED Undercabinet and Pucks




Sage™ LED Showcase Lightbar

Description	CAT. #	Specs
<p>120V LED Light Bar (1" Square)</p>	 EUD32CT5W	12", 5W, 300 lm, 2700K - 5000K
	EUD3330W	18", 8W, 500 lm, 3000K
	 EUD34CT5W	24", 10W, 600 lm, 2700K - 5000K
	EUD3530W	30", 12W, 720 lm, 3000K
	 EUD36CT5W	36", 15W, 900 lm, 2700K - 5000K
	EUD3730W	48", 20W, 1200 lm, 3000K
<p>Power Cord</p>	EUDCRD	6' Length
<p>End-to-End Connector</p>	EUDCS31	
<p>Linking Cable</p>	EUDC31	6" Length
<p>Jbox for hard wire connection</p>	EUDJBX	White




Flax™ LED Adjustable Undercabinet

Description	CAT. #	Specs
<p>24V LED Undercabinet (90° Angle Tilt)</p>	EUM21W	8", 4.5W, 200 lm, 3000K
	EUM22W	16", 8.9W, 400 lm, 3000K
<p>18W Adaptor</p>	EUDRV18	18W, 24 DC, 120V, 72" Power Cord. For EUD21-24
<p>Adaptor</p>	EUDRV72	72W, 72" output wires. For EUD21-24
<p>Mini Connector</p>	EUMCS1	For EUM21-24
<p>Inline Switch</p>	EUMS1	12" wire, for EUM21-24
<p>Linking Cable Wire</p>	EUMC24	24" wire, for EUM21-24
	EUMC36	36" wire, for EUM21-24
<p>Inline Dimmer Switch</p>	DIMU1	72W, for EUM21-24


LED Undercabinet and Pucks











Azalea™ LED Undercabinet Bar

Description	CAT. #	Specs
 120V LED Undercabinet	EUS41W	13 ½", 5W, 370 lm, 4000K
	EUS43W	22 ½", 8W, 640 lm, 4000K
	EUS45W	35 ½", 12W, 1200 lm, 4000K
	EUS47W	47 ½", 17W, 1600 lm, 4000K
 Linking Cable	EUSC6	6" Length
	EUSC12	12" Length
	EUSC24	24" Length
	EUSC36	36" Length
 Power Cord	EUSPC	5' Length


Tansy™ LED Undercabinet

Description	CAT. #	Specs
 120V LED Undercabinet	EUM31W	8", 3.6W, 220 lm, 3000K
	EUM32BZ	16", 7.2W, 450 lm, 3000K
	EUM33BZ	24", 10.8W, 670 lm, 3000K
	EUM34W	32" 14.4W, 890 lm, 3000K
	EUM34BZ	32" 14.4W, 890 lm, 3000K











Ixia™ 24V DC LED Slim Undercabinet/Showcase

Description	CAT. #	Specs
 24V DC LED Undercabinet Bar CCT Tunnable with EUDCCT (3000K - 6500K)	EUN51W	8", 3W, 160 lm, 3000K-6500K
	EUN52W	12", 4.5W, 260 lm, 3000K-6500K
	EUN53W	20", 7.5W, 420 lm, 3000K-6500K
 CCT Controller/Dimmer	EUDCCT	
 Linking Cable	EUDC51	
 Dimmer Switch	EUDS1	
 PIR Sensor	EUDPH1	
 Motion Sensor	EUDMS1	
 Input Connector	EUDPC	
 24V LED Driver	DRV24V30W	


LED Undercabinet and Pucks








LED Undercabinet Lightbars & Accessories

Description	CAT. #	Specs
 <p>LED Lightbar Aluminum finish with Clear Polycarbonate Lens</p>	EUD11CW	6", 1.6W, 4000K
	EUD12WW	12", 3.3W, 3000K
	EUD14WW	35 1/2", 9.9W, 3000K
	EUD14CW	35 1/2", 9.9W, 4000K
 <p>Lightbar Mounting Brackets</p>	EUDCL1	(0°) Mounting bracket for EUD11-15
	EUDCL2	(45°) Mounting bracket for EUD11-15
 <p>Mini Straight Connector</p>	EUDCS1	Mini Straight Connector for EUD11-15
 <p>Power Connector</p>	EUDP1	12", for EUD11-15
 <p>Linking Cable Male connector on both ends</p>	EUDC2	12", for EUD11-15
	EUDC3	24", for EUD11-15
	EUDC4	36", for EUD11-15
 <p>18W Adaptor</p>	EUDRV18	18W, 72" Power Cord. For EUD11-15
 <p>LED Lightbar Aluminum Finish with White Polycarbonate Lens Linkable up to 10 ft.</p>	EUD24WW	47 1/4", 18W, 3000K
	EUD24CW	47 1/4", 18W, 4000K
 <p>Desktop Driver with 40" AC Power Cord</p>	EUDRV18-2	18W, for EUD21-24
	EUDRV60-2	60W, for EUD21-24
 <p>Mini Linking Connector</p>	EUDCS21	For EUD21-24
 <p>Linking Cable</p>	EUDC21	12", for EUD21-24
	EUDC22	24", for EUD21-24







LED Undercabinet and Pucks




Aster™ 12V Slim Puck Lights (Dimmable with 12V DC dimmable driver)

Description	CAT. #	Specs
 Recessed & Surface Mount Mini Slim Round LED Puck Light (2 3/8" O.D. x 1/2" H) NEW!	E250N	Nickel, 3.5W, 280 lm, 3000K
	E250-27W	White, 3.5W, 300 lm, 2700K
	E250-27B	Black, 3.5W, 300 lm, 2700K
 Recessed & Surface Mount Mini Slim Square LED Puck Light (2 3/8" Sq. x 1/2" H)	E251N	Nickel, 3.5W, 280 lm, 3000K
 Surface Mount Mini Super Slim Round LED Puck Light (2 3/8" O.D. x 3/16" H)	E252N	Nickel, 3.5W, 280 lm, 3000K
 Plug-in Driver with 6' Cord and Plug. 6-Outlet Distributor	DRV12V30W	30W, 12V DC
 6-Way Distributor	EDIS6	6-way distributor to be used with 12V drivers.


Sedum™ 12V DC Super Slim Puck Lights (Dimmable with 12V DC dimmable driver)

Description	CAT. #	Specs
 Sedum™ Super Slim Mini Magnetic LED Puck Lights (3" O.D. x 1/4" H)	E261-27W	White, 2.2, 170 lm, 2700K
	E261-27B	Black, 2.2, 170 lm, 2700K
	E261-27BZ	Bronze, 2.2, 170 lm, 2700K
	E261W	White, 2.2, 170 lm, 3000K
	E261B	Black, 2.2, 170 lm, 3000K
	E261BZ	Bronze, 2.2, 170 lm, 3000K
	E261-35W	White, 2.2, 170 lm, 3500K
	E261-35B	Black, 2.2, 170 lm, 3500K
E261-35BZ	Bronze, 2.2, 170 lm, 3500K	
 LED Puck Lights Driver	DRV12V12W	12W, 12V DC, for Sedum™ Mini LED Puck Light
 Sedum™ Super Slim Mini Magnetic LED Puck Lights Kits Kit Includes: (3) LED Puck Lights with Driver included 	E363-27W	White, 2.2, 170 lm, 2700K
	E363-27B	Black, 2.2, 170 lm, 2700K
	E363-27BZ	Bronze, 2.2, 170 lm, 2700K
	E363W	White, 2.2, 170 lm, 3000K
	E363B	Black, 2.2, 170 lm, 3000K
	E363BZ	Bronze, 2.2, 170 lm, 3000K
	E363-35W	White, 2.2, 170 lm, 3500K
	E363-35B	Black, 2.2, 170 lm, 3500K
E363-35BZ	Bronze, 2.2, 170 lm, 3500K	
 Sedum™ Super Slim Mini Magnetic LED Puck Lights Kits Kit Includes: (6) LED Puck Lights with Driver included 	E366-27W	White, 2.2, 170 lm, 2700K
	E366-27B	Black, 2.2, 170 lm, 2700K
	E366-27BZ	Bronze, 2.2, 170 lm, 2700K
	E366W	White, 2.2, 170 lm, 3000K
	E366B	Black, 2.2, 170 lm, 3000K
	E366BZ	Bronze, 2.2, 170 lm, 3000K
	E366-35W	White, 2.2, 170 lm, 3500K
	E366-35B	Black, 2.2, 170 lm, 3500K
E366-35BZ	Bronze, 2.2, 170 lm, 3500K	







Undercabinet and Pucks







24V DC Dimmers

Description	CAT. #	Specs
 Dimmer with Built-In Driver with On/Off Switch	DIMTP2	60W, 120V Input
	DIMTP3	100W, 120V Input

12V & 24V DC Drivers

Description	CAT. #	Specs
 Electronic Driver ELV Dimmable	DRVE24V60W	24V, 60W
 Electronic Dimmable LED Driver	DRVE12V48DW	12V DC, 48W, 4A
	DRVE12V60DW	12V DC, 60W, 5A
	DRVE12V96DW	12V DC, 96W, 8A
 Universal Dimmable LED Driver/Transformer (Small)	DRVU12V24WD	12V DC, 24W, 2A
	DRVU12V60WD	12V DC, 60W, 5A
	DRVU24V24WD	24V DC, 24W, 1A
	DRVU24V60WD	24V DC, 60W, 2.5A
 Universal Dimmable LED Driver/Transformer (Medium)	DRVU12V100WD	12V DC, 100W, 8A
	DRVU24V100WD	24V DC, 100W, 4A
 Universal Dimmable LED Driver/Transformer (Large)	DRVU24V200WD	24V DC, 200W, 8A
 Universal Dimmable LED Driver/Transformer (X-Large)	DRVU24V300WD	24V DC, 300W, 12A

T5 Fluorescent Undercabinet Lights

Description	CAT. #	Specs
 Slim Line Fluorescent Undercabinet and Cove Light	EUS24W	37 1/4", F24T5 Lamp Included
 Lens	EUS8L	Lens for EUS8
	EUS14L	Lens for EUS14
	EUS21L	Lens for EUS21
	EUS28L	Lens for EUS28
 Link Cable	EUSC6	6" Linking Cable
	EUSC12	12" Linking Cable
	EUSC24	24" Linking Cable
	EUSC36	36" Linking Cable
 5' Power Cord	EUSPC	5 ft. Power Cord



Exit & Emergency Lighting

Exit and Emergency Lighting 176



















Accessories for Exit & Emergency Lights 176

Exit and Emergency Lighting








Self illuminating Signs



Exit and Emergency

Description	CAT. #	Specs
 <p>LED Exit Sign with Battery Back Up</p> <p></p>	EELEDRG	Red & Green Letters
	EELED	Green Letters
	EELE1	Red Letters
	EELEDB	Green Letters/Black Housing
	EELE1B	Red Letters/Black Housing
 <p>Self Illuminating Exit Sign</p> <p></p>	EE80S	Green Letters
	EE81S	Red Letters
 <p>LED Exit Sign with LED Emergency Lights</p> <p></p>	EE85HR	Red Letters
	EE86HG	Green Letters
	EE86HRG	Red & Green Letters
 <p>LED Exit Sign and LED Emergency Lights</p> <p></p>	EE94HG	Green Letters
	EE94HRG	Red & Green Letters
 <p>Single & Double Face LED Edge Lit Exit Sign with Battery Backup</p> <p></p>	EDGLIT1RG	Red & Green Letters Single Face
	EDGLIT2RG	Red & Green Letters Double Face
 <p>Single & Double Face LED Recessed Edge Lit Exit Sign with Battery Backup</p> <p></p>	EDGREC1RG	Red & Green Letters Single Face
	EDGREC2G	Green Letters / Double Face
	EDGREC2R	Red Letters / Double Face
 <p>Outdoor LED Diecast Emergency & Path Light with Battery Backup</p> <p></p>	EE91LW	White
	EE91LBZ	Bronze
 <p>LED Emergency Light</p> <p></p>	EE80L	Two 2W heads, 250 lm total.
 <p>LED Adjustable Emergency Light</p> <p></p>	EE22L	14 5/8" W x 5 1/8" H 3 3/4" D

Accessories for Exit & Emergency Lights

Description	CAT. #	Specs
 <p>Battery Backup</p>	EEP3A	2 3/4" x 1 7/8" x 4" 4.8 V, 700mA hour
 <p>Rechargeable Battery Backup</p>	EEP4A	2 3/4" x 1 7/8" x 4" 6V, 4A hours
 <p>Battery Backup</p>	EEP9A	6V Ni-Cad Battery Pack for EE90L
 <p>Lamp</p>	L4	5W, for EE20L & EE70L
 <p>Clear Shield for Exit Signs</p>	EEPS60	W: 12 3/4", H: 10 3/8", D: 2 1/2"
 <p>Clear Shield for Emergency Heads</p>	EEPS65	W: 15 3/8", H: 7 3/4", D: 5 3/4"
 <p>Wire Guards</p>	EEWG11	W: 15", H: 13 1/2", x D: 6"
	EEWG22	W: 30", H: 13 1/2", x D: 6"

LED Wallpacks & Floodlights



LED Wall Pack & Wall Mount

178

LED Floodlights & Accessories



179

LED Wall Packs and Floodlights

Energy efficient performance




LED Wall Packs


Description	CAT. #	Specs
 <p>Small LED Wall Pack 120/277V DLC (150W MH Equivalent)</p>	EWP30S40	30W, 3800 lm, 4000K
 <p>Medium LED Wall Pack 120/277V DLC (175W MH Equivalent)</p>	EWP45M50	45W, 4500 lm, 5000K
	EWP70M50	70W, 6800 lm, 5000K
	EWP90M40	90W, 9300 lm, 4000K
	EWP90M50	90W, 9500 lm, 5000K

* Dimmable Wall Packs Available. Visit www.elcolighting.com *

LED Wall Mount

Description	CAT. #	Specs
 <p>LED Wall Mount with 120V PhotoCell DLC (70W MH Equivalent)</p> <p>*Add U at end of item# for 120/277V</p>	EWM25W30	25W, 2000 lm, 3000K

Compact Fluorescent Floodlight

Description	CAT. #	Specs
 <p>Compact Fluorescent Floodlight</p>	WS40	13W, 120V

LED Wall Packs and Floodlights

Energy efficient performance



LED Floodlights

Description	CAT. #	Specs	
Small LED Floodlight	EFL1550S	15W, 2000 lm, 120/277V	
	EFL2740S	27W, 3400 lm, 120/277V	
	EFL2750S	27W, 3600 lm, 120/277V	
Medium LED Floodlight	EFL4550M	45W, 6000 lm, 120/277V	
	EFL6050M	60W, 8000 lm, 120/277V	
Knuckle Mount Mini Floodlight DLC (70W MH Equivalent)	EFL15S40WFK	15W, 1500 lm, 4000K	
	EFL15S50WFK	15W, 1600 lm, 5000K	
Trunnion Mount Mini Floodlight DLC (70W MH Equivalent)	EFL15S40WFT	15W, 1500 lm, 4000K	
	EFL15S50WFT	15W, 1600 lm, 5000K	
Knuckle Mount Mini Floodlight DLC (100W MH Equivalent)	EFL30S40WFK	30W, 3000 lm, 4000K	
	EFL30S50WFK	30W, 3100 lm, 5000K	
Trunnion Mount Mini Floodlight DLC (100W MH Equivalent)	EFL30S40WFT	30W, 3000 lm, 4000K	
	EFL30S50WFT	30W, 3100 lm, 5000K	
Medium Flood Spread LED Floodlight DLC (100W MH Equivalent)	EFL35M40FL	35W, 2800 lm, 4000K	
	EFL35M50FL	35W, 3000 lm, 5000K	
	Medium Flood Spread LED Floodlight DLC (150W MH Equivalent)	EFL45M40FL	45W, 4000 lm, 4000K
		EFL45M50FL	45W, 4500 lm, 5000K
	Wide Flood Spread LED Floodlight DLC (100W MH Equivalent)	EFL35M40WF	35W, 2800 lm, 4000K
		EFL35M50WF	35W, 3000 lm, 5000K
Wide Flood Spread LED Floodlight DLC (150W MH Equivalent)	EFL45M40WF	45W, 4000 lm, 4000K	
	EFL45M50WF	45W, 4500 lm, 5000K	
Large LED Floodlight DLC (200W MH Equivalent)	EFL70L40WF	70W, 6750 lm, 4000K	
	EFL70L50WF	70W, 7500 lm, 5000K	
	EFL90L40WF	90W, 9000 lm, 4000K	

* Large Dimmable LED Floodlight Available. Visit www.elcolighting.com *

Accessories

Description	CAT. #	Specs
120/277V Button Photocell	EWPPHBU	120/277V
	EWPPHB1	120V
120/277V Swivel Photocell	EWPPHSU	
Wireguard for Medium Size (35W/45W) Floodlight	EFLMWG	
	Wireguard for Large Size (75W/90W) Floodlight	EFLLLWG
Slipfitter for Large Floodlights. Field Changeable	EFLLSF	
Floodlight Adjustable Trunnion Bracket	EFLLTB	
Knuckle	EFLMKW	For medium Floodlights only



LED **Pathway** Lighting

In-Ground LED Lighting	181
Trogon™ LED Brick Lights	182
Incandescent Diecast Brick Lights	182
Mini Moa™ LED Step Lights	183
Ibis™ Diecast LED Step Lights	183
Incandescent Step Lights	186

LED Pathway Lighting


In-Ground, Brick and Step Lights



In-Ground LED Lighting

Description	CAT. #	Specs
-------------	--------	-------

Energy efficient LED Lighting fixtures designed to be install in-ground. Our in-ground applications are water and weather resistant making it the perfect lighting solution for virtually any application. Suitable for installation in concrete, soft dirt and turf applications. The in-ground lighting is ideal as a safety/accent lighting in patios, gardens, decks, docks, building entrances, pathways, and many other locations.

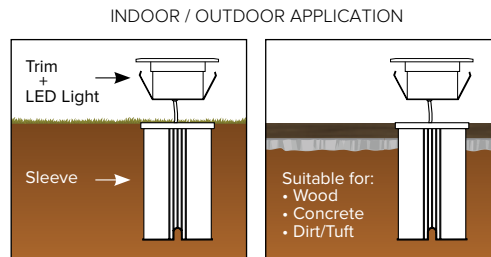

In-Ground LED Light Fixtures

- Dimmable Triac/ELV
- 45° beam angle
- Weather resistant clear glass lens
- Weather resistant in-ground sleeve
- ETL listed for wet locations



ELIG330250N	3W, 275 lm, 3000K, 12V DC, Nickel
ELIG330250B	3W, 275 lm, 3000K, 12V DC, Black
ELIG330250BZ	3W, 275 lm, 3000K, 12V DC, Bronze
ELIG330250CP	3W, 275 lm, 3000K, 12V DC, Copper



In-Ground LED Light



ELIG330

3W, 3000K, 12 V DC, Dimmable Triac/ELV, Stainless steel body, water-resistant glass lens with silicon gasketed seal, ETL listed for wet location



In-Ground Sleeve

ELIGRH

- Weather resistant in-ground sleeve for concrete or soil installation
- 2 1/8" O.D. x 3 3/8" H



In-Ground Stainless Steel Screw-On Trims

ELIG250N	Nickel, 2 1/2" O.D.
ELIG250B	Black, 2 1/2" O.D.
ELIG250BZ	Bronze, 2 1/2" O.D.
ELIG250CP	Copper, 2 3/4" O.D.




LED Pathway Lighting

In-Ground, Brick and Step Lights






Trogon™ LED Brick Lights








Description	CAT. #	Specs
 Trogon™ LED Brick Light with Angled Louver	ELST81W	White, 5.4W, 340 lm, 3000K
	ELST81B	Black, 5.4W, 340 lm, 3000K
	ELST81BZ	Bronze, 5.4W, 340 lm, 3000K
 Trogon™ LED Brick Light with Grill Faceplate	ELST82W	White, 5.4W, 340 lm, 3000K
	ELST82B	Black, 5.4W, 340 lm, 3000K
	ELST82BZ	Bronze, 5.4W, 340 lm, 3000K
 Trogon™ LED Brick Light with Open Faceplate	ELST83W	White, 5.4W, 340 lm, 3000K
	ELST83B	Black, 5.4W, 340 lm, 3000K
	ELST83BZ	Bronze, 5.4W, 340 lm, 3000K
 HIGHLUMEN™ Trogon™ LED Brick Light with Open Faceplate	ELST84W	White, 12W, 1000 lm, 3000K
	ELST84B	Black, 12W, 1000 lm, 3000K
	ELST84BZ	Bronze, 12W, 1000 lm, 3000K
 HIGHTECH™ Directional LED Brick Light with Open Faceplate	ELST85W	White, 12W, 1000 lm, 3000K
	ELST85B	Black, 12W, 1000 lm, 3000K
	ELST85BZ	Bronze, 12W, 1000 lm, 3000K

Incandescent Diecast Brick Lights



Description	CAT. #	Specs
 Incandescent Brick Light with Angled Louver	ELST31BZ	Bronze, 40W, 120V
 Incandescent Brick Light with Open Faceplate	ELST32W	White, 40W, 120V
	ELST32B	Black, 40W, 120V
	ELST32BZ	Bronze, 40W, 120V
 Incandescent Brick Light with Grill Faceplate	ELST37W	White, 40W, 120V
	ELST37B	Black, 40W, 120V
	ELST37BZ	Bronze, 40W, 120V

Accessories for Brick Lights

Description	CAT. #	Specs
 Grill Faceplate Replacement	PST1W	White, for ELST82
	PST1B	Black, for ELST82
	PST1BZ	Bronze, for ELST82
 Louver Faceplate Replacement	PST4W	White, for ELST81
	PST4B	Black, for ELST81
	PST4BZ	Bronze, for ELST81
 Open Faceplate Replacement	PST5W	White, for ELST83 & ELST84
	PST5B	Black, for ELST83 & ELST84
	PST5BZ	Bronze, for ELST83 & ELST84
 Replacement Lens for Brick Lights	PST2L	For ELST81, ELST82, ELST83 & ELST84
 LED Module Replacement Driver included	PST80	5.4W, 340 lm, 3000K, for ELST81, ELST82, ELST83
	PST84	12W, 1000 lm, 3000K, for ELST84

LED Pathway Lighting

In-Ground, Brick and Step Lights



Mini Moa™ LED Step Lights



Description	CAT. #	Specs
<p>120V Mini Moa™ LED Step Light with Angled Louver (Vertical)</p>	ELST64W	120V, White, 0.8W, 3000K
	ELST64B	120V, Black, 0.8W, 3000K
	ELST64BZ	120V, Bronze, 0.8W, 3000K
<p>12V Mini Moa™ LED Step Light with Angled Louver (Vertical)</p>	ELST74W	12V, White, 0.8W, 3000K
	ELST74B	12V, Black, 0.8W, 3000K
	ELST74BZ	12V, Bronze, 0.8W, 3000K
<p>120V Mini Moa™ LED Step Light with Angled Louver (Horizontal)</p>	ELST65W	120V, White, 0.8W, 3000K
	ELST65B	120V, Black, 0.8W, 3000K
	ELST65BZ	120V, Bronze, 0.8W, 3000K
<p>12V Mini Moa™ LED Step Light with Angled Louver (Horizontal)</p>	ELST75W	12V, White, 0.8W, 3000K
	ELST75B	12V, Black, 0.8W, 3000K
	ELST75BZ	12V, Bronze, 0.8W, 3000K
<p>120V Mini Moa™ LED Step Light with Frosted Acrylic Lens</p>	ELST66W	120V, White, 0.8W, 3000K
	ELST66B	120V, Black, 0.8W, 3000K
	ELST66BZ	120V, Bronze, 0.8W, 3000K
<p>12V Mini Moa™ LED Step Light with Frosted Acrylic Lens</p>	ELST76W	12V, White, 0.8W, 3000K
	ELST76B	12V, Black, 0.8W, 3000K
	ELST76BZ	12V, Bronze, 0.8W, 3000K
<p>Photocell 120V Mini Moa™ LED Step Light with Frosted Acrylic Lens</p>	ELST69W	120V, White, 0.8W, 3000K
	ELST69B	120V, Black, 0.8W, 3000K
	ELST69N	120V, Nickel, 0.8W, 3000K
	ELST69BZ	120V, Bronze, 0.8W, 3000K

Ibis™ Diecast LED Step Lights with 3-CCT Switch



Description	CAT. #	Specs
<p>120V Ibis™ Embedded Mini LED Step Light with 3-CCT Switch</p>	ELST27CT3W	120V, White, 5W, 250 lm, 3000K - 5000K
	ELST27CT3B	120V, Black, 5W, 250 lm, 3000K - 5000K
	ELST27CT3BZ	120V, Bronze, 5W, 250 lm, 3000K - 5000K
<p>120V Ibis™ Angled Louver Mini LED Step Light with 3-CCT Switch</p>	ELST28CT3W	120V, White, 3W, 100 lm, 3000K - 5000K
	ELST28CT3B	120V, Black, 3W, 100 lm, 3000K - 5000K
	ELST28CT3BZ	120V, Bronze, 3W, 100 lm, 3000K - 5000K
<p>120V Ibis™ Frosted Lens Mini LED Step Light with 3-CCT Switch</p>	ELST29CT3W	120V, White, 3W, 200 lm, 3000K - 5000K
	ELST29CT3B	120V, Black, 3W, 200 lm, 3000K - 5000K
	ELST29CT3BZ	120V, Bronze, 3W, 200 lm, 3000K - 5000K




LED Pathway Lighting

In-Ground, Brick and Step Lights




Ibis™ Diecast LED Step Lights



Description	CAT. #	Specs	
 12V Ibis™ Round LED Step Light with Open Faceplate	ELST8430W	12V, White, 3W, 3000K	
	ELST8430B	12V, Black, 3W, 3000K	
	ELST8430N	12V, Nickel, 3W, 3000K	
	ELST8430BZ	12V, Bronze, 3W, 3000K	
	ELST8430CP	12V, Copper, 3W, 3000K	
	ELST8440W	12V, White, 3W, 4000K	
	ELST8440B	12V, Black, 3W, 4000K	
	ELST8440N	12V, Nickel, 3W, 4000K	
	ELST8440BZ	12V, Bronze, 3W, 4000K	
	ELST8440CP	12V, Copper, 3W, 4000K	
120V Ibis™ Round LED Step Light with Open Faceplate	ELST8630W	120V, White, 3W, 3000K	
	ELST8630B	120V, Black, 3W, 3000K	
	ELST8630N	120V, Nickel, 3W, 3000K	
	ELST8630BZ	120V, Bronze, 3W, 3000K	
	ELST8630CP	120V, Copper, 3W, 3000K	
	ELST8640W	120V, White, 3W, 4000K	
	ELST8640B	120V, Black, 3W, 4000K	
	ELST8640N	120V, Nickel, 3W, 4000K	
	ELST8640BZ	120V, Bronze, 3W, 4000K	
	ELST8640CP	120V, Copper, 3W, 4000K	
12V Ibis™ Round LED Step Light with Louver Faceplate	ELST8530W	12V, White, 3W, 3000K	
	ELST8530B	12V, Black, 3W, 3000K	
	ELST8530N	12V, Nickel, 3W, 3000K	
	ELST8530BZ	12V, Bronze, 3W, 3000K	
	ELST8530CP	12V, Copper, 3W, 3000K	
	ELST8540W	12V, White, 3W, 4000K	
	ELST8540B	12V, Black, 3W, 4000K	
	ELST8540N	12V, Nickel, 3W, 4000K	
	ELST8540BZ	12V, Bronze, 3W, 4000K	
	ELST8540CP	12V, Copper, 3W, 4000K	
120V Ibis™ Round LED Step Light with Louver Faceplate	ELST8730W	120V, White, 3W, 3000K	
	ELST8730B	120V, Black, 3W, 3000K	
	ELST8730BZ	120V, Bronze, 3W, 3000K	
	ELST8730CP	120V, Copper, 3W, 3000K	
	ELST8740W	120V, White, 3W, 4000K	
	ELST8740B	120V, Black, 3W, 4000K	
	ELST8740BZ	120V, Bronze, 3W, 4000K	
	ELST8740CP	120V, Copper, 3W, 4000K	
	 120V Ibis™ Mini LED Step Light	ELST9930W	120V, White, 2.5W, 3000K
		ELST9930B	120V, Black, 2.5W, 3000K
ELST9930N		120V, Nickel, 2.5W, 3000K	
ELST9930BZ		120V, Bronze, 2.5W, 3000K	
12V Ibis™ LED Step Light with Open Faceplate		ELST9130W	12V, White, 2W, 3000K
	ELST9130B	12V, Black, 2W, 3000K	
	ELST9130N	12V, Nickel, 2W, 3000K	
	ELST9130BZ	12V, Bronze, 2W, 3000K	
	ELST9130CP	12V, Copper, 2W, 3000K	
	ELST9140W	12V, White, 2W, 4000K	
	ELST9140B	12V, Black, 2W, 4000K	
	ELST9140N	12V, Nickel, 2W, 4000K	
	ELST9140BZ	12V, Bronze, 2W, 4000K	
	ELST9140CP	12V, Copper, 2W, 4000K	
 120V Ibis™ LED Step Light with Open Faceplate	ELST9530W	120V, White, 2W, 3000K	
	ELST9530B	120V, Black, 2W, 3000K	
	ELST9530N	120V, Nickel, 2W, 3000K	
	ELST9530BZ	120V, Bronze, 2W, 3000K	
	ELST9530CP	120V, Copper, 2W, 3000K	
	ELST9540W	120V, White, 2W, 4000K	
	ELST9540B	120V, Black, 2W, 4000K	
	ELST9540N	120V, Nickel, 2W, 4000K	
	ELST9540BZ	120V, Bronze, 2W, 4000K	
	ELST9540CP	120V, Copper, 2W, 4000K	




LED Pathway Lighting

In-Ground, Brick and Step Lights



Ibis™ Diecast LED Step Lights



Description	CAT. #	Specs
 12V Ibis™ LED Step Light with Angled Louver	ELST9230W	12V, White, 2W, 3000K
	ELST9230B	12V, Black, 2W, 3000K
	ELST9230N	12V, Nickel, 2W, 3000K
	ELST9230BZ	12V, Bronze, 2W, 3000K
	ELST9230CP	12V, Copper, 2W, 3000K
	ELST9240W	12V, White, 2W, 4000K
	ELST9240B	12V, Black, 2W, 4000K
	ELST9240N	12V, Nickel, 2W, 4000K
	ELST9240BZ	12V, Bronze, 2W, 4000K
	ELST9240CP	12V, Copper, 2W, 4000K
 120V Ibis™ LED Step Light with Angled Louver	ELST9630W	120V, White, 2W, 3000K
	ELST9630B	120V, Black, 2W, 3000K
	ELST9630N	120V, Nickel, 2W, 3000K
	ELST9630BZ	120V, Bronze, 2W, 3000K
	ELST9630CP	120V, Copper, 2W, 3000K
	ELST9640W	120V, White, 2W, 4000K
	ELST9640B	120V, Black, 2W, 4000K
	ELST9640N	120V, Nickel, 2W, 4000K
	ELST9640BZ	120V, Bronze, 2W, 4000K
	ELST9640CP	120V, Copper, 2W, 4000K
 12V Ibis™ LED Step Light with Angled Louver	ELST9330W	12V, White, 2W, 3000K
	ELST9330B	12V, Black, 2W, 3000K
	ELST9330N	12V, Nickel, 2W, 3000K
	ELST9330BZ	12V, Bronze, 2W, 3000K
	ELST9330CP	12V, Copper, 2W, 3000K
	ELST9340W	12V, White, 2W, 4000K
	ELST9340B	12V, Black, 2W, 4000K
	ELST9340N	12V, Nickel, 2W, 4000K
	ELST9340BZ	12V, Bronze, 2W, 4000K
	ELST9340CP	12V, Copper, 2W, 4000K
 120V Ibis™ LED Step Light with Angled Louver	ELST9730W	120V, White, 2W, 3000K
	ELST9730B	120V, Black, 2W, 3000K
	ELST9730N	120V, Nickel, 2W, 3000K
	ELST9730BZ	120V, Bronze, 2W, 3000K
	ELST9730CP	120V, Copper, 2W, 3000K
	ELST9740W	120V, White, 2W, 4000K
	ELST9740B	120V, Black, 2W, 4000K
	ELST9740N	120V, Nickel, 2W, 4000K
	ELST9740BZ	120V, Bronze, 2W, 4000K
	ELST9740CP	120V, Copper, 2W, 4000K
 12V Ibis™ LED Step Light with Scoop	ELST9430W	12V, White, 2W, 3000K
	ELST9430B	12V, Black, 2W, 3000K
	ELST9430N	12V, Nickel, 2W, 3000K
	ELST9430BZ	12V, Bronze, 2W, 3000K
	ELST9430CP	12V, Copper, 2W, 3000K
	ELST9440W	12V, White, 2W, 4000K
	ELST9440B	12V, Black, 2W, 4000K
	ELST9440N	12V, Nickel, 2W, 4000K
	ELST9440BZ	12V, Bronze, 2W, 4000K
	ELST9440CP	12V, Copper, 2W, 4000K
 120V Ibis™ LED Step Light with Scoop	ELST9830W	120V, White, 2W, 3000K
	ELST9830B	120V, Black, 2W, 3000K
	ELST9830N	120V, Nickel, 2W, 3000K
	ELST9830BZ	120V, Bronze, 2W, 3000K
	ELST9830CP	120V, Copper, 2W, 3000K
	ELST9840W	120V, White, 2W, 4000K
	ELST9840B	120V, Black, 2W, 4000K
	ELST9840N	120V, Nickel, 2W, 4000K
	ELST9840BZ	120V, Bronze, 2W, 4000K
	ELST9840CP	120V, Copper, 2W, 4000K



LED Pathway Lighting

In-Ground, Brick and Step Lights





Incandescent Step Lights



Description	CAT. #	Specs
 Incandescent Step Light with Louvered Faceplate	ELST42W	120V, White, 40W
	ELST42B	120V, Black, 40W
	ELST42BZ	120V, Bronze, 40W
Louvered Faceplate Replacements	ELST10W, B, BZ	For ELST42 Series
 Incandescent Step Light with Frosted Glass Lens	ELST43W	120V, White, 40W
	ELST43B	120V, Black, 40W
	ELST43BZ	120V, Bronze, 40W
Open Faceplate Replacements	ELST1W, B, BZ	For ELST43 Series

Accessories for Step Lights

Description	CAT. #	Specs
 Hanger Bars (Set of 2)	HB24	For ELST22 & ELST23
 Flat Hanger Bars (Set of 2)	FB27	27", for wood construction



The **Ambio**TM Collection

24V Indoor LED Tape Light	188
24V Super Flexible Indoor LED Tape Light	189
24V Sunset Dimming LED Tape Light	189
Indoor LED Tape Light Accessories	189
24V Indoor Continuous LED Tape Light	190
RGB Indoor LED Tape Light & Accessories	191
24V Outdoor LED Tape Lights	191
Sectional LED Tape Lights & Accessories	192


Aluminum Channels for LED Tape Lights	193
24V DC Drivers	194
LED Duralight TM & Accessories	195
Architectural Covelight Accessories	195
LED Flat Rope Light & Accessories	196
Magnetic & Electronic Transformers	196

The Ambio™ Collection

Architectural Grade LED TAPE Light



24V Indoor LED Tape Light


	Description	CAT. #	Specs
	Custom Cut of 1.5W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 23ft.	E15-2427-CC	1.5W/ft, 124 lm/ft, 2700K
		E15-2430-CC	1.5W/ft, 124 lm/ft, 3000K
		E15-2440-CC	1.5W/ft, 124 lm/ft, 4000K
 1.5W/ft	16 foot roll of 1.5W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 23ft.	E15-2427-16	1.5W/ft, 124 lm/ft, 2700K
		E15-2430-16	1.5W/ft, 124 lm/ft, 3000K
		E15-2440-16	1.5W/ft, 124 lm/ft, 4000K
	100 foot roll of 1.5W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 23ft.	E15-2427-100	1.5W/ft, 124 lm/ft, 2700K
		E15-2430-100	1.5W/ft, 124 lm/ft, 3000K
		E15-2440-100	1.5W/ft, 124 lm/ft, 4000K
	Custom Cut of 2.2W/ft LED Tape. 24V. Cuttable every 8". 9 LED/ft. MAX. run 40ft.	E22-2427-CC	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-CC	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-CC	2.2W/ft, 185 lm/ft, 4000K
 2.2W/ft	16 foot roll of 2.2W/ft LED Tape. 24V. Cuttable every 8". 9 LED/ft. MAX. run 40ft.	E22-2427-16	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-16	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-16	2.2W/ft, 185 lm/ft, 4000K
	100 foot roll of 2.2W/ft LED Tape. 24V. Cuttable every 8". 9 LED/ft. MAX. run 40ft.	E22-2427-100	2.2W/ft, 185 lm/ft, 2700K
		E22-2430-100	2.2W/ft, 185 lm/ft, 3000K
		E22-2440-100	2.2W/ft, 185 lm/ft, 4000K
	Custom Cut of 3W/ft LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 15ft.	E30-2427-CC	3W/ft, 250 lm/ft, 2700K
		E30-2430-CC	3W/ft, 250 lm/ft, 3000K
		E30-2440-CC	3W/ft, 250 lm/ft, 4000K
 3W/ft	16 foot roll of 3W/ft LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 15ft.	E30-2427-16	3W/ft, 250 lm/ft, 2700K
		E30-2430-16	3W/ft, 250 lm/ft, 3000K
		E30-2440-16	3W/ft, 250 lm/ft, 4000K
	100 foot roll of 3W/ft LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX run 15ft.	E30-2427-100	3W/ft, 250 lm/ft, 2700K
		E30-2430-100	3W/ft, 250 lm/ft, 3000K
		E30-2440-100	3W/ft, 250 lm/ft, 4000K
	Custom Cut of 4.4W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 26ft.	E44-2427-CC	4.4W/ft, 360 lm/ft, 2700K
		E44-2430-CC	4.4W/ft, 360 lm/ft, 3000K
		E44-2440-CC	4.4W/ft, 360 lm/ft, 4000K
 4.4W/ft	16 foot roll of 4.4W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 26ft.	E44-2427-16	4.4W/ft, 360 lm/ft, 2700K
		E44-2430-16	4.4W/ft, 360 lm/ft, 3000K
		E44-2440-16	4.4W/ft, 360 lm/ft, 4000K
	100 foot roll of 4.4W/ft LED Tape. 24V. Cuttable every 4". 18 LED/ft. MAX. run 26ft.	E44-2427-100	4.4W/ft, 360 lm/ft, 2700K
		E44-2430-100	4.4W/ft, 360 lm/ft, 3000K
		E44-2440-100	4.4W/ft, 360 lm/ft, 4000K
	Custom Cut of 4.4W/ft. HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft.	E45-2427-CC	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-CC	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-CC	4.4W/ft, 450 lm/ft, 4000K
 4.4W/ft	16 foot roll of 4.4W/ft. HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft.	E45-2427-16	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-16	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-16	4.4W/ft, 450 lm/ft, 4000K
 4.4W/ft	100 foot roll of 4.4W/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 26ft.	E45-2427-100	4.4W/ft, 450 lm/ft, 2700K
		E45-2430-100	4.4W/ft, 450 lm/ft, 3000K
		E45-2440-100	4.4W/ft, 450 lm/ft, 4000K
	Custom Cut of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft.	E50-2427-CC	5W/ft, 500 lm/ft, 2700K
		E50-2430-CC	5W/ft, 500 lm/ft, 3000K
		E50-2440-CC	5W/ft, 500 lm/ft, 4000K
 5W/ft	16 foot roll of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft.	E50-2427-16	5W/ft, 500 lm/ft, 2700K
		E50-2430-16	5W/ft, 500 lm/ft, 3000K
		E50-2440-16	5W/ft, 500 lm/ft, 4000K
	100 foot roll of 5W/ft LED Tape. 24V. Cuttable every 1". 81 LED/ft. MAX. run 13ft.	E50-2427-100	5W/ft, 500 lm/ft, 2700K
		E50-2430-100	5W/ft, 500 lm/ft, 3000K
		E50-2440-100	5W/ft, 500 lm/ft, 4000K

The Ambio™ Collection


Architectural Grade LED TAPE Light




24V Indoor LED Tape Light

Description	CAT. #	Specs
Custom Cut of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft.	E60-2427-CC	6W/ft, 550 lm/ft, 2700K
	E60-2430-CC	6W/ft, 550 lm/ft, 3000K
	E60-2440-CC	6W/ft, 550 lm/ft, 4000K
 6W/ft 16 foot roll of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft.	E60-2427-16	6W/ft, 550 lm/ft, 2700K
	E60-2430-16	6W/ft, 550 lm/ft, 3000K
	E60-2440-16	6W/ft, 550 lm/ft, 4000K
100 foot roll of 6W/ft LED Tape. 24V. Cuttable every 2". 48 LED/ft. MAX. run 13ft.	E60-2427-100	6W/ft, 550 lm/ft, 2700K
	E60-2430-100	6W/ft, 550 lm/ft, 3000K
	E60-2440-100	6W/ft, 550 lm/ft, 4000K
Custom Cut of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft.	E80-2427-CC	8.8W/ft, 800 lm/ft, 2700K
	E80-2430-CC	8.8W/ft, 800 lm/ft, 3000K
	E80-2440-CC	8.8W/ft, 800 lm/ft, 4000K
 8.8W/ft 16 foot roll of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft.	E80-2427-16	8.8W/ft, 800 lm/ft, 2700K
	E80-2430-16	8.8W/ft, 800 lm/ft, 3000K
	E80-2440-16	8.8W/ft, 800 lm/ft, 4000K
100 foot roll of 8.8W/ft LED Tape. 24V. Cuttable every 1". 73 LED/ft. MAX. run 15ft.	E80-2427-100	8.8W/ft, 800 lm/ft, 2700K
	E80-2430-100	8.8W/ft, 800 lm/ft, 3000K
	E80-2440-100	8.8W/ft, 800 lm/ft, 4000K





24V Super Flexible Indoor LED Tape Lights

Description	CAT. #	Specs
Custom Cut. Strip width of 8mm (5/16"). Cuttable every 4". 18 LED/ft. MAX. run 26 ft.	EF26-24WW-CC	1.8W/ft, 200 lm/ft, 3000K
	EF26-24CW-CC	1.8W/ft, 200 lm/ft, 6500K
 1.8W/ft 16 foot rolls. Strip width of 8mm (5/16"). Cuttable every 4". 18 LED/ft. MAX. run 26 ft.	EF26-24WW-16	1.8W/ft, 200 lm/ft, 3000K
	EF26-24CW-16	1.8W/ft, 200 lm/ft, 6500K

24V Sunset Dimming Indoor LED Tape Lights DIMS TO WARM SUNSET DIMMING TECHNOLOGY

Description	CAT. #	Specs
Custom Cut 3.5W/ft LED Tape Light. 24V. Cuttable every 2.5" or every 14 LED's MAX. run 13ft.	E36-24SD	Warm White, 3.5W/ft, Sunset
 3.5W/ft 16 foot roll of 3.5W/ft LED Tape Light. 24V. Cuttable every 2.5" or every 14 LED's MAX. run 13ft.	E36-24SD-16	Warm White, 3.5W/ft, Sunset

Indoor LED Tape Light Accessories







Description	CAT. #	Specs
 Strip to Strip Connector	EPD21	2-conductor end-to-end for single color tape light. For connecting two tape lights together
 10" Hardwire Connector	EPD22	10" wire leads for single color tape lights, for connecting tape lights to LED driver
 120" Hardwire Connector	EPD22-120	120" wire leads for single color tape lights, for connecting tape lights to LED driver
 10" Extension Connector	EPD23	10" wire leads for single color tape lights, for connecting two tape lights at a 10" distance

The Ambio™ Collection



Architectural Grade LED TAPE Light








Indoor LED Tape Light Accessories

	Description	CAT. #	Specs
	2" Extension Connector for Connecting 2-Tape Lights	EPSD23-2	2" wire leads for single color tape lights
	24" Extension Connector for Connecting 2-Tape Lights	EPSD24	24" wire leads for single color tape lights
	DC Power Adapter	EPSD25	6" wire for single color tape lights, for connecting tape light to plug-in power supplies
	Tape to Wire Block Connector	EPSD19	Screw down connector for connecting tape light to wire
	Diamond Screw Down Connector	EPSD20	For connecting two tape lights together without any soldering
	Tape-to-Power Diamond Connector with 6" Wire	EPSD26	For use as a lead wire to tape light connector. Screwdriver included to tighten screws to secure tape light

24V Indoor Continuous COB LED Tape Light

	Description	CAT. #	Specs
	Custom Cut. Strip width of 8mm (5/16"). Cuttable every 1 25/32". MAX. run 16 ft.	E30CB-2427	3W/ft, 245 lm/ft, 2700K
		E30CB-2430	3W/ft, 260 lm/ft, 3000K
		E30CB-2440	3W/ft, 275 lm/ft, 4000K
3W/ft	100 ft. roll of 3W/ft LED Continuous Tape Light. Cuttable every 1 25/32". MAX. run 16 ft.	E30CB2427100	3W/ft, 245 lm/ft, 2700K
		E30CB2430100	3W/ft, 260 lm/ft, 3000K
		E30CB2440100	3W/ft, 275 lm/ft, 4000K
	Custom Cut. Strip width of 10mm (3/8"). Cuttable every 1 25/32". MAX. run 16 ft.	E44CB-2427	4.5W/ft, 365 lm/ft, 2700K
		E44CB-2430	4.5W/ft, 385 lm/ft, 3000K
		E44CB-2440	4.5W/ft, 425 lm/ft, 4000K
4.5W/ft	100 ft. roll of 3W/ft LED Continuous Tape Light. Cuttable every 1 25/32". MAX. run 16 ft.	E44CB2427100	4.5W/ft, 365 lm/ft, 2700K
		E44CB2430100	4.5W/ft, 385 lm/ft, 3000K
		E44CB2440100	4.5W/ft, 425 lm/ft, 4000K

Indoor Continuous COB LED Tape Light Accessories


	Description	CAT. #	Specs
	Tape-to-Tape Light Mini Connector	EPSD21CB8	For E30CB Tape Light Series
		EPSD21CB10	For E44CB Tape Light Series
	10" Hardwire Connector	EPSD22CB8	For E30CB Tape Light Series
		EPSD22CB10	For E44CB Tape Light Series
	Tape-to-Tape with 10" Wire	EPSD23CB8	For E30CB Tape Light Series
		EPSD23CB10	For E44CB Tape Light Series
	Tape-to-Tape Light L-Connector	EPSD27LCB8	For E30CB Tape Light Series
		EPSD27LCB10	For E44CB Tape Light Series
	Tape-to-Tape Light X-Connector	EPSD28XCB8	For E30CB Tape Light Series
		EPSD28XCB10	For E44CB Tape Light Series

The Ambio™ Collection






Architectural Grade LED TAPE Light





RGB Indoor LED Tape Light

Description	CAT. #	Specs
Custom Cut RGB Tape	E44-24M-CC	4.4w/ft, 165 lm/ft, RGB
 16 ft. roll RGB Tape	E44-24M-16	4.4w/ft, 165 lm/ft, RGB
100 ft. roll RGB Tape	E44-24M-100	4.4w/ft, 165 lm/ft, RGB

RGB Indoor LED Tape Light Accessories

Description	CAT. #	Specs
 Touch Wall Panel RGB Controller	ECN12	24V DC Input
 Wireless signal receiver	ECN14-1	24V DC Input, Maximum load of 216W
 RGB Remote Controller	ECN14-2	Infrared (IR) remote controller
 Hardwire Connector for connecting multi-color (RGB) tape lights to LED Driver	EPS26	Fits RGB tape lights with 10" wire leads
	EPS29	Fits RGB tape lights with 24" wire leads
 Extension Connector for connecting two multi-color (RGB) tape lights at a distance	EPS27	Fits RGB tape lights with 10" wire leads
	EPS28	Fits RGB tape lights with 24" wire leads

24V Damp Location LED Tape Light


Description	CAT. #	Specs
Custom Cut of Outdoor 4.4w/ft LED Tape 24V. Cuttable every 4". 18 LED/ft. MAX. run 16ft. 	EW44-2427-CC	4.4w/ft, 360 lm/ft, 2700K
	EW44-2430-CC	4.4w/ft, 360 lm/ft, 3000K
	EW44-2440-CC	4.4w/ft, 360 lm/ft, 4000K
16 foot roll of Outdoor 4.4w/ft LED Tape 24V. Cuttable every 4". 18 LED/ft. MAX. run 16ft. 	EW44-2427-16	4.4w/ft, 360 lm/ft, 2700K
	EW44-2430-16	4.4w/ft, 360 lm/ft, 3000K
	EW44-2440-16	4.4w/ft, 360 lm/ft, 4000K
 Custom Cut of Outdoor 4.4w/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 16ft. 	EW45-2427-CC	4.4w/ft, 450 lm/ft, 2700K
	EW45-2430-CC	4.4w/ft, 450 lm/ft, 3000K
	EW45-2440-CC	4.4w/ft, 450 lm/ft, 4000K
16 foot roll of Outdoor 4.4w/ft HIGH DENSITY LED Tape. 24V. Cuttable every 2". 36 LED/ft. MAX. run 16ft. 	EW45-2427-16	4.4w/ft, 450 lm/ft, 2700K
	EW45-2430-16	4.4w/ft, 450 lm/ft, 3000K
	EW45-2440-16	4.4w/ft, 450 lm/ft, 4000K

The Ambio™ Collection








Architectural Grade LED TAPE Light







Sectional LED Tape Lights

Description	CAT. #	Specs
 <p>Non-Waterproof LED Tape Light</p>	E460-24WW	Warm White, 1.5W/ft, 3000K
	E460-24CW	Cool White, 1.5W/ft, 6500K
	E1460-24WW	Warm White, 4.4W/ft, 3000K
	E1460-24CW	Cool White, 4.4W/ft, 6500K

Sectional LED Tape Light Accessories





Description	CAT. #	Specs
 <p>LED Dimmer Unit</p>	DIMTP1	For use in between driver and Tape Light, not for use with RGB tapes
 <p>Cord and Plug</p>	EUCRD	8' Power cord and plug for LED Tape Light
 <p>Power Connector</p>	EPN11	6' Power connector for WW and CW Tape Lights only
 <p>Tape Light Connector for WW and CW types only</p>	EPS12	20" Cut tape connector for E460 and EWP460 tapes
	EPS13	20" Cut tape connector for E1460 and EWP1460 tapes
 <p>Tape Light Connector for RGB (M) type only</p>	EPS14	15" Cut tape connector for E1460 and EWP1460
 <p>Tape Light Linking Cable for WW and CW types only</p>	EPSD1	1' Linking Cable for E460 & EWP460 tapes
	EPSD2	1' Linking Cable for E1460 & EWP1460 tapes
 <p>Tape Light Linking Cable for RGB (M) type only</p>	EPSD3	1' Linking Cable for E1460 & EWP1460 RGB tapes

Aluminum Channels for LED Tape

	Description	CAT. #	Specs
	Custom Cut Shallow Mount LED Aluminum Channel	EUD31	Custom Cut Channel
	8' Shallow Mount LED Aluminum Channel	EUD31-8	8' Channel w/lens & connectors
	Custom Cut Deep Mount LED Aluminum Channel	EUD32	Custom Cut Channel
	8' Deep Mount LED Aluminum Channel	EUD32-8	8' Channel w/lens & connectors
	Custom Cut Recessed Mount LED Aluminum Channel	EUD33	Custom Cut Channel
	8' Recessed Mount LED Aluminum Channel	EUD33-8	8' Channel w/lens & connectors
	Custom Cut Square Corner Mount LED Aluminum Channel	EUD34	Custom Cut Channel
	8' Square Corner Mount LED Aluminum Channel	EUD34-8	8' Channel w/lens & connectors
	Custom Cut Surface Mount LED Aluminum Channel	EUD35	Custom Cut Channel
	8' Surface Mount LED Aluminum Channel	EUD35-8	8' Channel w/lens & connectors
	Custom Cut Round Corner Mount LED Aluminum Channel	EUD36	Custom Cut Channel
	8' Round Corner Mount LED Aluminum Channel	EUD36-8	8' Channel w/lens & connectors
	Custom Cut Shallow Recessed Mount LED Aluminum Channel	EUD37	Custom Cut Channel
	8' Shallow Recessed Mount LED Aluminum Channel	EUD37-8	8' Channel w/lens & connectors

8' Channel are approximately 7'8"

Aluminum Channels Accessories








	Description	CAT. #	Specs
	End Caps for Aluminum Channels (Set of 2)	EUDEN31	For EUD31
		EUDEN32	For EUD32
		EUDEN33	For EUD33
		EUDEN34	For EUD34
		EUDEN35	For EUD35
		EUDEN36	For EUD36
		EUDEN37	For EUD37
	8 Ft. Frosted Lens for Aluminum Channels	EUDL31	For EUD31, 32, 37
		EUDL33	For EUD33
		EUDL34	For EUD34
		EUDL35	For EUD35
		EUDL36	For EUD36
		EUDL31C	For EUD31, 32, 37
		EUDL33C	For EUD33
	8 Ft. Clear Lens for Aluminum Channels	EUDL34C	For EUD34
		EUDL35C	For EUD35
		EUDL36C	For EUD36
		EUDMT31	For EUD31
		EUDMT32	For EUD32
		EUDMT33	For EUD33
		EUDMT34	For EUD34
	Mounting Clips for Aluminum Channels (Set of 2)	EUDMT35	For EUD35
		EUDMT36	For EUD36
		EUDMT37	For EUD37

The Ambio™ Collection

Architectural Grade LED TAPE Light



24V DC Drivers













Description	CAT. #	Specs
 24V DC Electronic Driver ELV Dimmable	DRVE24V60W	60W
 24V Electronic Driver NON-Dimmable	DRV30W	30W, 120/277V
	DRV100W	100W, 120/277V
 0-10V Dimmable Driver	DRV30W-10	30W, 0-10V, 120/277V
	DRV60W-10	60W, 0-10V, 120/277V
	DRV96W-10	96W, 0-10V, 120/277V
 Universal Dimmable LED Driver/Transformer (Small)	DRVU24V24WD	24W, 24V DC, 1A
	DRVU24V60WD	60W, 24V DC, 2.5A
 Universal Dimmable LED Driver/Transformer (Medium)	DRVU24V100WD	100W, 24V DC, 4A
 Universal Dimmable LED Driver/Transformer (Large)	DRVU24V200WD	200W, 24V DC, 8A
 Universal Dimmable LED Driver/Transformer (X-Large)	DRVU24V300WD	300W, 24V DC, 12A

The Ambio™ Collection






Architectural Grade LED TAPE Light



Duralight™ & Accessories

Description	CAT. #	Specs
 	EDU2	Custom Cut, Clear
	EDU2BL	Blue
	EDU2GR	Green
	EDU2RD	Red
	EDU2-150	150 ft per roll (Max run), Clear
	EDU2LEDWW-CC	Custom Cut, 0.96W/ft, 76 lm/ft, Warm White
	EDU2LEDWW150	150' Reel, 0.96W/ft, 76 lm/ft, Warm White
	EDU2LEDCW-CC	Custom Cut, 0.96W/ft, 76 lm/ft, Cool White
	EDU2LEDCW150	150' Reel, 0.96W/ft, 76 lm/ft, Cool White
	ECN6	8 functions, 95 ft. MAX. for LED Duralights
	EPC2	6 ft. Power Cord for EDU2
	EPCLED	Power Cord for EDU2LED
	EPN2	For EPCLED
	EPS2	
	EPMT	
	EPEN	
	EPCH	
	EPIN	

Architectural Covelite Accessories








Description	CAT. #	Specs
	EPCH	6 ft. Channel
	EPD-2	
	EPD-4	
	EPD-6	
	WB-5-Z	5W, 12V, T-3 ¼"
	WB-10-Z	10W, 12V, T-3 ¼"
	WB-10-ZF	10W, 12V, T-3 ¼", Frosted

The Ambio™ Collection





Architectural Grade LED TAPE Light






LED Flat Rope Light & Accessories

Description	CAT. #	Specs
 120V Flat LED Rope Light	EDF12WW-CC	Custom Cut, 90', 0.5W/ft, 76 lm/ft, Warm White
	EDF12WW-90	90', 0.5W/ft, 76 lm/ft, Warm White
	EDF11WW-CC	Custom Cut, 90', 1W/ft, 100 lm/ft, Warm White
	EDF11WW-90	90', 1W/ft, 100 lm/ft, Warm White
	EDF21WW-CC	Custom Cut, 30', 3W/ft, 150 lm/ft, Warm White
	EDF21WW-30	30', 3W/ft, 150 lm/ft, Warm White
 Power Cord	EFPC61	6' Power Cord & Driver for EDF11 & EDF12
	EFPC62	6' Power Cord & Driver for EDF21
 Splice Connector	EFPS21	Splice connector for EDF11 & EDF12
	EFPS22	Splice connector for EDF21
 End Cap	EFPEN1	End Cap for EDF11 & EDF12
	EFPEN2	End Cap for EDF21
 Glue Tube	EFPGL	For end caps, power cord and splice connector
 Mounting Clip	EPD-4	For EDF11 & EDF12
	EPD-7	For EDF21
 Open Mounting Clip	EPD-8	For EDF11 & EDF12

Transformers

Description	CAT. #	Specs
 Miniature Electronic Transformer	LET-75	12V AC, 75W
 Electronic Transformer (No Minimum Load)	LET-60	120V, 60W
	LET-60-277	277V, 60W
 Electronic Transformer (Bottom Load)	LET-60H	120V, 60W
 0-10V Dimmable Electronic Transformer	LET-60DX	0-10V, 120V, 60W
	LET-60DX-277	0-10V, 277V, 60W

Magnetic & Electronic Transformers 120V & 277V to 12V or 277V to 120V

Description	CAT. #	Specs
 Low Voltage Magnetic Transformer	ETR12	120/12V, 50W, for EL1499 & EL2699
	ETR12-20	120/12V, 20W, for EL1499-75
	ETR-277	Steps 277V Line Voltage Down to 120V, 250W
 Low Voltage Magnetic Transformer for Retrofit Kit	ETRK50	120V/12V, 50W, Medium Screw Base
	ETRK20	120V/12V, 20W
 Electronic Transformer	ETRK60E	for Retrofit Kit 120V/12V, 60W, Low load (3W-50W)

Lamps, Socket Adapters, & General Accessories



Accessories for Recessed Fixtures 198

LED Lamps 200

JC & Wedge Lamps 201

Metal & Plastic Rings 201

Ballast 202

Adjustable Hole Cutter 202

2" x4" Junction Box & Cover 202

Fire Rated Products 203

Emergency Battery Backups 204

ELCO LED Ceiling Displays 205

ELCO Countertop Mats 206

ELCO Travel Cases 207














ELCO Countertop Displays 207

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Accessories for Recessed Fixtures

Description	CAT. #	Specs
 <p>Lens for MR16 Units</p>	L28	Clear Lens, 1 ¹⁵ / ₁₆ " D, 49 mm
	L38	Honey Comb Louver
	L39	Honeycomb Louver Lens, Mill Brite
	L40	Clear UV Filter, 49 mm
	L41	Frosted UV Filter, 49 mm
	L42	3 ⁵ / ₈ " Diffused Spread Lens for PAR30
	L44	3 ⁵ / ₈ " Soft Focus Lens for PAR30
 <p>Lens Retainer Ring</p>	RTNRTRK1	For ET528, ET532 & ET547
 <p>Retainer Ring & Lens</p>	RTNRTRK2	For MR11 Track Heads
 <p>Lampholder Clip</p>	CLIP200	For ET226, ET239
 <p>GU24 Socket Adapter</p>	PSA21	Socket Adapter Medium Screw into GU-24
 <p>Socket Adapter</p>	PSA25	Socket Adapter for HALO 5" Trims to fit Elco Housings
 <p>Socket Extender</p>	PSE26	
 <p>Socket Adapter</p>	PSA27	For 4" Eyeball to fit HALO Housing
 <p>GU10 Socket</p>	PSA29	Med. screw-in to GU10 with Lamp (50W, 120V, MR16, GU10 Base)
 <p>E26 Medium Base Adapter</p>	PSA30	Med. base to LED Quick Connect
 <p>GU10 Base Adapter</p>	PSA31	GU10 to LED Quick Connect
 <p>Socket Adapter</p>	PSA32	Med. screw into GU10 without lamp
 <p>Socket Adapter</p>	PSA33	Med. screw into GU10 with lamp

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Accessories for Recessed Fixtures


	Description	CAT. #	Specs
	Dimmable MR16 Sized Lamp with Quick Connect and medium base adapter, For use in Medium Base Housings with MR16 Trims. See elcolighting.com for full trim and housing selection	PSA34-27	7W, 530 lm, 2700K
		PSA34	7W, 500 lm, 3000K
		PSA34-35	7W, 530 lm, 3500K
		PSA34-40	7W, 550 lm, 4000K
	GU10 Socket	P010S	GU10 Socket with Wire
	E26 Socket	P011S	E26 Base phenolic socket with 6" wire
	Socket Assembly	P012S	Socket, wire and thermal protector for EL71C & R10H
	GU24 Socket	P024S	GU-24 Socket with 18" wire
	Socket for MR16	P016S	for MR16 with 24" wires
		P006S	for MR16 W/6" wires, no disk
	Screw Base Adapter	P010T	Phenolic Screw Base Adapter with 8" Pigtail Wires
	Coil Spring	SPRING	Coil Spring for ELM30
	Torsion Spring for Trims	V-SPRING	
	Flat Hanger Bars	FB27	Set of two 27" flat hanger bars for commercial frames. For wood construction
	Hanger Bars	HB24	Set of two Hanger Bars for Plaster Frames. Extend to 24", perforated easy cut at 8" & 10"
	Hanger Bars	CH26	Set of two 26" C-Channel Hanger Bars for Commercial Housings. For T-Bar ceiling
	J-Box Cover	JBOXCV	J-Box cover for housings
	Insulation Sensor	RP-1B	For 120V Only
	Clip-1	CLIP-1	Set of 3 Retrofit Clips
	Clip-2	CLIP-2	Set of 3 Retrofit Clips Remodel Commercial
	Clip-4	CLIP-4	Set of 3 Retrofit Clips Commercial Frame
	Clip721	CLIP721	Set of 3 Clips for EL721
	Clip-R	CLIP-R	Set of 3 Clips for Remodel Housings
	Clip-C	CLIP-C	Set of Clips for Torsion Springs

Lamps, Socket Adapters and General Accessories




Complete control and flexibility for your needs









Accessories for Recessed Fixtures

Description	CAT. #	Specs
 Socket Plate with screw and wing nut	L-BRCKT	for 6" Housings
	L-BRCKT4	for 4" Housings
	L-BRCKT5	for 5" Housings

Accessories for T5 Fluorescent Undercabinet Lights

Description	CAT. #	Specs
 Ballast Universal	EBA12E	For 8W T5 Lamp
	EBA21E	For 13W T5 Lamp
 Lens	EUL12-3	Lens for 3 1/2" wide EUN12E
	EUL21-3	Lens for 3 1/2" wide EUN21E
	EUL24-3	Lens for 3 1/2" wide EUN24E
	EUL32-3	Lens for 3 1/2" wide EUN32E
	EUL42-3	Lens for 3 1/2" wide EUN42E
 Cord / Plug	EUCRD	8 ft. Cord and Plug

LED Lamps



Description	CAT. #	Specs
 Dimmable MR16 Sized Lamp with Quick Connect, For use in LED Quick Connect Housings with MR16 Trims. See elcolighting.com for full trim and housing selection	PSA37-27	7W, 500 lm, 2700K
	PSA37	7W, 500 lm, 3000K
	PSA37-35	7W, 530 lm, 3500K
	PSA37-40	7W, 550 lm, 4000K
 Quick Connect A-Lamp	PSA41-40	12W, 1000 lm, 4000K
 12V LED Low Voltage Bi-Pin Lamp	MR16LD	7W, 500 lm, 3000K
 120V GU10 LED Lamp	MR120-GU10LD	7W, 500 lm, 3000K
 120V Short Neck PAR30 LED Lamp E26	PAR30FSLD	10W, 800 lm, 3000K
 120V PAR38 LED Lamp E26	PAR38FLD	17W, 1200 lm, 3000K

Lamps, Socket Adapters and General Accessories


Complete control and flexibility for your needs










Wedge Base Lamps

Description	CAT. #	Specs
 Xenon Wedge Base Lamp	WB-5-Z	5W, 12V, Clear
	WB-10-Z	10W, 12V, Clear
	WB-18-Z	18W, 12V, Clear
 Halogen Wedge Based Lamp	L4	5W, 6V, for Exit Sing and Emergency (for EE20L, EE40L, EE50L, & EE70L)

JC & Wedge Base Lamps

Description	CAT. #	Specs
 Lamp, G-8 Base, 40° Flood	JC-25	25W, 12V, Bi-Pin Lam, for EUC22
	JC-50	50W, 120V, JC Lamp G8
	JC-50-12V	50W, 12V, JC Lamp

Metal & Plastic Rings


Description	CAT. #	Specs
 3" Metal Ring	RM3W	White, 4 1/4" O.D.
	RM3B	Black, 4 1/4" O.D.
	RM3C	Clear, 4 1/4" O.D.
	RM3G	Gold, 4 1/4" O.D.
	RM3N	Nickel, 4 1/4" O.D.
	RM3BZ	Bronze, 4 1/4" O.D.
	RM3CP	Copper, 4 1/4" O.D.
 4" Ring	RM4W	White, 4 3/4" O.D.
	RM4B	Black, 4 3/4" O.D.
	RM4G	Gold, 4 3/4" O.D.
	RM4N	Nickel, 4 3/4" O.D.
	RM4BZ	Bronze, 4 3/4" O.D.
	RM4CP	Copper, 4 3/4" O.D.
	RP4SH	Plastic Ring, 4 3/4" O.D.
 4" Oversized Metal Ring	OM4W	White, 4 3/4" O.D.
	OM4B	White, 4 3/4" O.D.
 5" Metal Ring	RM5W	White, 6 1/4" O.D.
	RM5B	Black, 6 1/4" O.D.
	RM5C	Clear, 6 1/4" O.D.
	RM5G	Gold, 6 1/4" O.D.
	RM5N	Nickel, 6 1/4" O.D.
	RM5BZ	Bronze, 6 1/4" O.D.
	RM5CP	Copper, 6 1/4" O.D.
 5" Oversized Metal Ring	OM5W	White, 7 1/4" O.D.
	OM5B	Black, 7 1/4" O.D.
 6" Metal & Plastic Ring	RM7W	White, 7 1/4" O.D.
	RM7B	Black, 7 1/4" O.D.
	RM7C	Clear, 7 1/4" O.D.
	RM7N	Nickel, 7 1/4" O.D.
	RM7BZ	Bronze, 7 1/4" O.D.
	RM7CP	Copper, 7 1/4" O.D.
	RP7W	White Plastic Ring, 7 1/4" O.D.
RP7B	Black Plastic Ring, 7 1/4" O.D.	
 6" Oversized Plastic & Metal Ring	OVP7W	White Plastic, 8" O.D.
	OVP7B	Black Plastic, 8" O.D.
	OVM7W	White Metal, 8" O.D.
	OVM7B	Black Metal, 8" O.D.
	OVM7BZ	Bronze Metal, 8" O.D.

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs





Metal & Plastic Rings

Description	CAT. #	Specs
 7" Plastic Ring	RP8W	White, 7 1/2" O.D.

 8" Plastic Ring	RP9W	White, 8 1/4" O.D.
---	------	--------------------


Ballast

Description	CAT. #	Specs
 Electronic Ballast	P113E1	13W, 120V
	P126E1	26W, 120V
	P142EU	26W - 42W, 120/277V


 Electronic Ballast	PWH2E1	32/26/18/13W, 120V
--	--------	--------------------


 Biax Ballast	P240E1	40W, 120V for ET240 & ET239
	P255E1	55W, 120V for ET255

Adjustable Hole Cutter

Description	CAT. #	Specs
 Adjustable Hole Saw	EL5000	1 1/4" to 6 1/2"
	EL6000	2" to 8 1/4"
Drill	EL5001	
Upright Axle	EL5002	
Traverse Axle for EL5000	EL5003	
Blade A	EL5004A	
Blade B	EL5004B	
Adjusting Rod	EL5007	
Protection Cowl	EL5013	
Compression Spring	EL5016	
Set of Balance Bars	EL5018	
Allen Wrench	EL5019	
Traverse Axle for EL6000	EL6003	
Protection Cowl for EL6000	EL6013	
Set of Balance Bars for EL6000	EL6018	

2" x 4" Junction Box and Cover

Description	CAT. #	Specs
 2"x4" Junction Box	NEW! ELJ242	Galvanized steel corrosion resistant, (11) 7/8" knockouts 4" L x 2 1/8" W x 1 3/8" H












 2"x4" Junction Box Cover	NEW! ELJ242CVR	4 1/4" L x 1 3/8" W
--	--------------------------	---------------------

Lamps, Socket Adapters and General Accessories

Complete control and flexibility for your needs



Fire Products






Description	CAT. #	Specs
 <p>1-Hour Fire Enclosure</p>	FIREENCL	
	FIREENCL-S	Shallow
 <p>Mica Fire tape for use with FIREENCL</p>	FIRETAPE	16' Roll
 <p>Recessed Fixture 2-Hour Fire Rated Cover</p>	FIRECVR	Made of heat activated intumescent material
 <p>2-Hour Fire Rated LED Housings with Quick Connect</p>	EL39FICA	3" LED Housing
	EL48FICA	4" LED Housing
	EL56FICA	5" LED Housing
	EL76FICA	6" LED Housing
 <p>2-Hour Fire Rated Medium Base Housing with E26 Base Socket</p>	EL99FICA	4" LED Housing
	EL5FICA	5" LED Housing
	EL7FICA	6" LED Housing
 <p>2-Hour Fire Rated Housing with GU10 Socket</p>	EL39FICA-GU10	3" LED Housing
	EL49FICA-GU10	4" LED Housing
 <p>2-Hour Fire Rated Shallow Housing</p>	EL492FICAS	4" LED Shallow Housing
 <p>2-Hour Fire Rated Shallow Housing</p>	EL75FICAS	6" LED, Shallow Housing
 <p>4" New Construction IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>	EJB4ICA	4" New Construction Housing with quick connector for 2-Hour Fire Rated Ceilings
 <p>4" Remodel IC Airtight Housing for 2-Hour Fire Rated Ceilings</p>	EJB4RICA	Remodel tabs will not be completely covered by trim, painting may be required after installation or use of Oversize Ring (ELJ4OV) to cover tabs
	 <p>ELJ4OV</p>	For use with EJB4RICA to cover tabs

Lamps, Socket Adapters and General Accessories




Complete control and flexibility for your needs



Emergency Battery Backups

Description	CAT. #	Specs
 <p>Emergency Battery Backup (Single Whip - 90 Min. of Emergency Light)</p>	KEM-LD1	8W, Up to 750 lm EM output
	KEM-LD2	12W, Up to 1100 lm EM output
 <p>Emergency Battery Backup (Double Whip - 90 Min. of Emergency Light)</p>	KEM-LD3	8W, Up to 750 lm EM output
	KEM-LD4	12W, Up to 1100 lm EM output
 <p>Emergency Battery Backup (90 Min. of Emergency Light)</p>	KEM-LD5	25W, 120/277V, 50/60 Hz. Compatible with EL390, EL490, EL492, EL560, EL570, EL760, EL770 Series
 <p>Emergency Battery Backup (90 Min. of Emergency Light)</p>	KEM-LD7	15W, 120V, 50/60 Hz. Compatible with EL386, EL485, EL770, EL570 Series, Ply Sylo™, and 4" Koto Sylo™ Systems
 <p>Emergency Battery Backup (90 Min. of Emergency Light)</p>	KEM-ERT	25W, 100/277V AC, 50/60 Hz. Compatible to all 3"-8" Elm Fixtures (ERT3, ERT4, ERT6, & ERT8) & Canless Koto System

Accessories for Emergency Battery Backups

Description	CAT. #	Specs
 <p>Test Switch</p>	T-SWITCH	for KEM Battery Backups
 <p>Test Switch for KEM-LD1/2/3</p>	T-SWITCH-LD1	for KEM-LD1, KEM-LD2, and KEM-LD3
 <p>Test Switch for KEM-LD5</p>	T-SWITCH-LD5	for KEM-LD5

ELCO Marketing Products

ELCO LED Ceiling Displays

Hanging Oak™ & Teak™ System Display

DISP-F12LD

Flat Hanging Panel

DISP-D12LD

Box Hanging Panel



Hanging 2" & 3" Alder™ System Insert Display


(Inserts order separately)

DISP-F2LD2

Flat Hanging Panel

DISP-D2LD2

Box Hanging Panel

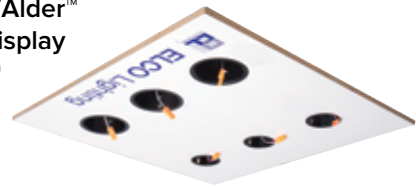

Hanging 4" LED Cans Display

(Inserts order separately)

DISP-F4LD4

Flat Hanging Panel

DISP-D4LD4

Box Hanging Panel



Hanging 6" LED Cans Display

(Inserts order separately)

DISP-F6LD3

Flat Hanging Panel

DISP-D6LD3

Box Hanging Panel



Hanging 4" Cedar™ System Display


(Inserts order separately)

DISP-F4LD5

Flat Hanging Panel

DISP-D4LD5

Box Hanging Panel

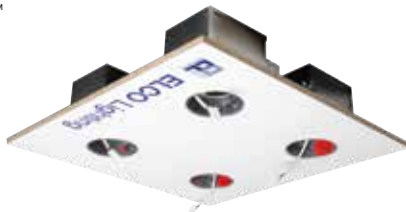

Hanging Elm™ System Display

DISP-F4LD1

Flat Hanging Panel

DISP-D4LD1

Box Hanging Panel



Hanging Undercabinet Bar Display

DISP-FULD1

Flat Hanging Panel

DISP-DULD1

Box Hanging Panel



Hanging Track Fixtures Display

(Fixtures order separately)

DISP-FT

Flat Hanging Panel

DISP-DT

Box Hanging Panel



Hanging Undercabinet Puck Display

DISP-F2LD1

Flat Hanging Panel



Hanging Recessed Box Display

(Trims not included)

DISP-F6

Flat 6" Line Voltage Housing

DISP-D6

Box Hanging Panel

DISP-F5

Flat 5" Line Voltage Housing

DISP-D5

Box Hanging Panel



ELCO Marketing Products

ELCO LED Ceiling Displays

Hanging Flush Mount Fixture Display

DISP-FDL1
Flat Hanging Panel



Hanging Flush Mount Display

DISP-FDLD2
Flat Hanging Panel



Hanging 4" Line Voltage Display

DISP-F4
Flat Display for T-BAR ceiling
DISP-D4
Box Display



Hanging 3" Low Voltage Display

(Trims order separately)
DISP-F3
Flat Display
DISP-D3
Box Display



Hanging Halogen Display

DISP-F2
Flat Display for T-BAR ceiling
DISP-D2
Box Display



Hanging CFL Display


DISP-F7
Flat Display for CFL Lamps
DISP-D7
Box Display for CFL Lamps
DISP-F6CF
6" CFL Drop-in Flat Display
DISP-F5CF
5" CFL Drop-in Flat Display




ELCO Countertop Mats



ELMAT001
LED Inserts & Housings



ELMAT002
LED Undercabinet & Tape Lights



ELMAT003
LED Track Lighting



ELMAT004
Koto™/Oak™/Teak™ System

ELCO Marketing Products

ELCO Ready Made Travel Cases



Ambio™ Travel Case
Includes: 1-EUDM31, 1-EUDM32,
1-EUDM33, 1-EUDM34, 1-EUDM35,
1-EUDM36, 1-EUDM37
ELTRV1051



Oak™ Travel Case
Includes: 1-E1L02F, 1-E1L12F,
1-E1L32F, 1-E1L22F,
1-E1LDRV60, 1-E1LF1
ELTRV1055



Koto™ Travel Case
Includes: 1-ELK09SD,
1-ELK0735, 1-ELK4118W,
1-ELK3629BB
ELTRV1060-A



Teak™ Travel Case
Includes: 1-E2LF2, 1-E2L11RICD,
1-E2L14F30B, 1-F2L13F30W,
1-E2L18F327BZ
ELTRV1059-A

ELCO Countertop Displays



DISP-KOTO
Koto™ System



DISP-TEAK
Teak™ System



DISP-OAK
Oak™ System



DISP-TAPE
LED Tape Lights



DISP-POC
Pocket Size Catalog

ELCO Catalogs



Order your Catalog today! - Email us at: orderdesk@elcolighting.com

Index

CH26	67, 199	DRVU24V200WD	174, 194	E1LF2-M2	7, 9	E2LF2-M2	9	E4LC12ICAD2	75
CLIP-1	199	DRVU24V300WD	174, 194	E1LF2-M3	7, 9	E2LF2-M3	9	E4LC12ICASD	75
CLIP-2	199	E1AK02F27	8	E1LF2-M4	7, 9	E2LF2-M4	9	E4LC12SD	75
CLIP-4	199	E1AK02F30	8	E1LF2-M5	7, 9	E2LF2-M5	9	E4LC16D2	75
CLIP200	198	E1AK02F35	8	E1TRL08AJIC	9	E2LK34ICA	18	E4LC16ICA2	75
CLIP721	199	E1AK02F40	8	E1TRL08AJICDX	9	E2LK35ICAD	18	E4LC16ICAD2	75
CLIP-C	199	E1AK02F50	8	E1TRL08IC	9	E2LK41ICA	18	E4LC16ICASD	75
CLIP-R	199	E1AK12F27	8	E1TRL08ICDX	9	E2LK42ICAD	18	E4LC16SD	75
DIMTP1	192	E1AK12F30	8	E2AJU12ICA	43	E2LK57RICA	19	E4LC082	75
DIMTP2	174	E1AK12F35	8	E2KCL10IC	30	E2LK94ICA	18	E4LC122	75
DIMTP3	174	E1AK12F40	8	E2KCL10ICDX	30	E2LK95ICAD	18	E4LC162	75
DIMU1	170	E1AK12F50	8	E2L08ICA	11	E2LKF1	30	E4LCF1	30, 59
DISP-D2	206	E1AK22F27	8	E2L08ICAD	11	E2LRC106	42	E4LFU08D2	84
DISP-D2LD2	205	E1AK22F30	8	E2L08RIC	11	E3FH08ICA2	73	E4LFU12D2	84
DISP-D3	206	E1AK32F27	8	E2L08RICD	11	E3FH08ICAD2	73	E4LFU16D2	84
DISP-D4	206	E1AK32F30	8	E2L10F27	12	E3FH08ICASD	73	E4LFU20D2	84
DISP-D4LD1	205	E1AK61F27	8	E2L10F30	12	E3KCL10IC	30	E4LFU30D2	84
DISP-D4LD4	205	E1AK61F30	8	E2L10F35	12	E3KCL10ICDX	30	E4LHU08D2	84
DISP-D4LD5	205	E1AK61F35	8	E2L10F40	12	E3LC08D2	73	E4LHU12D2	84
DISP-D5	205	E1AK61F40	8	E2L10F5D	12	E3LC08ICA2	73	E4LHU16D2	84
DISP-D6	205	E1AK61F5D	8	E2L11ICA	11	E3LC08ICAD2	73	E4LHU20D2	84
DISP-D6LD3	205	E1ATB08AJIC	9	E2L11ICAD	11	E3LC08ICASD	73	E4LHU30D2	84
DISP-D7	206	E1ATB08AJICDX	9	E2L11RIC	11	E3LC08SD	73	E4LK47ICA	18
DISP-D12LD	205	E1ATB08IC	9	E2L11RICD	11	E3LC10D2	73	E4LK48ICAD	18
DISP-DT	205	E1ATB08ICDX	9	E2L13F27	12	E3LC10ICA2	73	E4LK78ICA	18
DISP-DULD1	205	E1DWN08AJIC	9	E2L13F30	12	E3LC10ICAD2	73	E4LK79ICAD	18
DISP-F2	206	E1DWN08AJICDX	9	E2L13F35	12	E3LC10ICASD	73	E4LK87ICA	19
DISP-F2LD1	205	E1DWN08IC	9	E2L13F40	12	E3LC10SD	73	E4LK87ICA-EM1	19
DISP-F2LD2	205	E1DWN08ICDX	9	E2L13F5D	12	E3LC082	73	E4LK87RICA	19
DISP-F3	206	E1L02F27	6	E2L14F27	12	E3LC102	73	E4LK88ICAD	19
DISP-F4	206	E1L02F30	6	E2L14F30	12	E3LK53ICA	18	E4LK88ICAD-EM1	19
DISP-F4LD1	205	E1L02F35	6	E2L14F35	12	E3LK54ICAD	18	E4LK88RICAD	19
DISP-F4LD4	205	E1L02F40	6	E2L14F40	12	E3LK65ICA	19	E4LK98ICA	18
DISP-F4LD5	205	E1L02F5D	6	E2L14F5D	12	E3LK65ICA-EM1	19	E4LK99ICAD	18
DISP-F5	205	E1L12F27	6	E2L15F27	12	E3LK65RICA	19	E4LRC08D2	75
DISP-F5CF	206	E1L12F30	6	E2L15F30	12	E3LK66ICAD	19	E4LRC08ICA2	75
DISP-F6	205	E1L12F35	6	E2L15F35	12	E3LK66ICAD-EM1	19	E4LRC08ICAD2	75
DISP-F6CF	206	E1L12F40	6	E2L15F40	12	E3LK66RICAD	19	E4LRC08ICASD	75
DISP-F6LD3	205	E1L12F5D	6	E2L15F5D	12	E3LK76ICA	18	E4LRC08SD	75
DISP-F7	206	E1L22F27	6	E2L18F27	12	E3LK77ICAD	18	E4LRC12D2	75
DISP-F12LD	205	E1L22F30	6	E2L18F30	12	E3LK84ICA	18	E4LRC12SD	75
DISP-FDL1	206	E1L22F40	6	E2L18F35	12	E3LK85ICAD	18	E4LRC16D2	75
DISP-FDL2	206	E1L32F27	6	E2L18F40	12	E3LKF1	30	E4LRC16SD	75
DISP-FT	205	E1L32F30	6	E2L19F27	12	E3LRC08D2	73	E4LRC082	75
DISP-FULD1	205	E1L32F35	6	E2L19F30	12	E3LRC08ICA2	73	E4LRC122	75
DISP-KOTO	207	E1L32F40	6	E2L19F40	12	E3LRC08ICAD2	73	E4LRC162	75
DISP-OAK	207	E1L61F27	6	E2L97F27	13	E3LRC08ICASD	73	E4LRU08D2	84
DISP-POC	207	E1L61F30	6	E2L97F30	13	E3LRC08SD	73	E4LRU12D2	84
DISP-TAPE	207	E1L61F35	6	E2L97F35	13	E3LRC10D2	73	E4LRU16D2	84
DISP-TEAK	207	E1L61F40	6	E2L97F40	13	E3LRC10SD	73	E4LRU20D2	84
DRV12V12W	173	E1L61F5D	6	E2LAJ08ICA	11	E3LRC082	73	E4LRU30D2	84
DRV12V30W	173	E1LA08RIC	9	E2LAJ08ICAD	11	E3LRC102	73	E4LTU08D2	84
DRV24V30W	171	E1LA08RICD	9	E2LAJ11ICA	11	E4AJ08ICAD2	75	E4LTU12D2	84
DRV30W	194	E1LDRV60	7	E2LAJ11ICAD	11	E4AJ12ICAD2	75	E4LTU16D2	84
DRV30W-10	194	E1LF1	7, 9, 134	E2LC106	42	E4FH08ICA2	75	E4LTU20D2	84
DRV60W-10	194	E1LF1CAJ	7	E2LC106ICA	42	E4FH08ICAD2	75	E4LTU30D2	84
DRV96W-10	194	E1LF1CAJ-7	7	E2LC175ICA	42	E4FH08ICASD	75	E4SQLFU08D2	85
DRV100W	194	E1LF1CAJDX	7	E2LC175RICA	42	E4JB85ICA	19	E4SQLFU12D2	85
DRVE12V48DW	174	E1LF1CAJDX-7	7	E2LC185ICA	43	E4JB85RICA	19	E4SQLFU16D2	85
DRVE12V60DW	174	E1LF1-M2	7, 9	E2LC185RICA	43	E4KCL10IC	30	E4SQLFU20D2	85
DRVE12V96DW	174	E1LF1-M3	7, 9	E2LCU86ICA	43	E4KCL10ICDX	30	E4SQLFU30D2	85
DRVE24V60W	174, 194	E1LF1-M4	7, 9	E2LCU86RICA	43	E4LC08D2	75	E4SQLFU40D2	85
DRVU12V24WD	174	E1LF1-M5	7, 9	E2LF1	9, 11, 59	E4LC08ICA2	75	E4SQLHU08D2	85
DRVU12V60WD	174	E1LF2	7, 9	E2LF1-M2	11	E4LC08ICAD2	75	E4SQLHU12D2	85
DRVU12V100WD	174	E1LF2ICAJ	7	E2LF1-M3	11	E4LC08ICASD	75	E4SQLHU16D2	85
DRVU24V24WD	174, 194	E1LF2ICAJ-7	7	E2LF1-M4	11	E4LC08SD	75	E4SQLHU20D2	85
DRVU24V60WD	174, 194	E1LF2ICAJDX	7	E2LF1-M5	11	E4LC12D2	75	E4SQLHU30D2	85
DRVU24V100WD	174, 194	E1LF2ICAJDX-7	7	E2LF2	7, 11	E4LC12ICA2	75	E4SQLHU40D2	85

Index

E4TL08ICA2	77	E6LK56ICA	18	E9LHU60D2	90	E45-2440	188	E219C0727	42
E4TL08ICAD2	77	E6LK57ICAD	18	E9LTU08D2	90	E50-2427	188	E219C0730	42
E4TL08ICASD	77	E6LRC08D2	79	E9LTU12D2	90	E50-2430	188	E219C0735	42
E4TL12ICA2	77	E6LRC08ICA2	78	E9LTU16D2	90	E50-2440	188	E219C0740	42
E4TL12ICAD2	77	E6LRC08ICAD2	78	E9LTU20D2	90	E60-2427	189	E219C1827	43
E4TL12ICASD	77	E6LRC08ICASD	78	E9LTU30D2	90	E60-2430	189	E219C1830	43
E4TL16ICA2	77	E6LRC08SD	79	E9LTU40D2	90	E60-2440	189	E219C1835	43
E4TL16ICAD2	77	E6LRC12D2	79	E9LTU60D2	90	E80-2427	189	E219C1840	43
E4TL16ICASD	77	E6LRC12ICA2	78	E10	165	E80-2430	189	E246LF1	59
E5SQLFU11	71	E6LRC12ICAD2	78	E11	165	E80-2440	189	E250-27	173
E5SQLFU11EM1	71	E6LRC12ICASD	78	E12	165	E210C18SD	43	E250N	173
E5SQLFU11EM2	71	E6LRC12SD	79	E13	165	E210C0627	42	E251N	173
E5SQLFU20	71	E6LRC16D2	79	E15-2427	188	E210C0630	42	E252N	173
E5SQLFU20EM1	71	E6LRC16SD	79	E15-2430	188	E210C0727	42	E261	173
E5SQLFU20EM2	71	E6LRC20D2	79	E15-2440	188	E210C0730	42	E261-27	173
E6FH08ICA2	78	E6LRC20SD	79	E20	165	E210C0735	42	E261-35	173
E6FH08ICAD2	78	E6LRC082	79	E21	165	E210C0740	42	E310C	74
E6FH08ICASD	78	E6LRC122	79	E22	165	E210C1827	43	E314C	74
E6FH12ICA2	78	E6LRC162	79	E22-2427	188	E210C1830	43	E315C	74
E6FH12ICAD2	78	E6LRC202	79	E22-2430	188	E210C1835	43	E320C	74
E6FH12ICASD	78	E6LRU08D2	86	E22-2440	188	E210C1840	43	E329C	74
E6KCL10IC	30	E6LRU12D2	86	E23	165	E213C18SD	43	E363	173
E6KCL10ICDX	30	E6LRU16D2	86	E23DMF	134	E213C0627	42	E363-27	173
E6LC08D2	79	E6LRU20D2	86	E24V39FICA	20	E213C0630	42	E363-35	173
E6LC08ICA2	78	E6LRU30D2	86	E24V48FICA	20	E213C0727	42	E366	173
E6LC08ICAD2	78	E6LRU40D2	86	E24V75FICAS	20	E213C0730	42	E366-27	173
E6LC08ICASD	78	E6LRU60D2	86	E24V76FICA	20	E213C0735	42	E366-35	173
E6LC08SD	79	E6LTU08D2	86	E24V276ICA	20	E213C0740	42	E400	97
E6LC12D2	79	E6LTU12D2	86	E24V386ICA	20	E213C1827	43	E410	84
E6LC12ICA2	78	E6LTU16D2	86	E24V390ICA	20	E213C1830	43	E410C	76
E6LC12ICAD2	78	E6LTU20D2	86	E24V390RICA	20	E213C1835	43	E410R	81
E6LC12ICASD	78	E6LTU30D2	86	E24V485ICA	20	E213C1840	43	E411	84
E6LC12SD	79	E6LTU40D2	86	E24V490AJICA	20	E214C18SD	43	E411C	76
E6LC16D2	79	E6LTU60D2	86	E24V490ICA	20	E214C0627	42	E411R	81
E6LC16ICA2	78	E8LF1	59	E24V490RICA	20	E214C0630	42	E412	84
E6LC16ICAD2	78	E8LFU08D2	88	E24V760ICA	20	E214C0727	42	E412C	76
E6LC16ICASD	78	E8LFU12D2	88	E24V760RICA	20	E214C0730	42	E412R	81
E6LC16SD	79	E8LFU16D2	88	E24V770ICA	20	E214C0735	42	E414C	76
E6LC20D2	79	E8LFU20D2	88	E24V770RICA	20	E214C0740	42	E414R	81
E6LC20ICA2	78	E8LFU30D2	88	E25A	131	E214C1827	43	E415C	76
E6LC20ICAD2	78	E8LFU40D2	88	E25D	134	E214C1830	43	E415R	81
E6LC20ICASD	78	E8LFU60D2	88	E25F	132	E214C1835	43	E417C	76
E6LC20SD	79	E8LHU12D2	88	E25M	129	E214C1840	43	E417R	81
E6LC082	79	E8LHU16D2	88	E25P	133	E215C18SD	43	E418C	76
E6LC122	79	E8LHU20D2	88	E25T	130	E215C0627	42	E418R	81
E6LC162	79	E8LHU30D2	88	E30-2427	188	E215C0630	42	E420C	76
E6LC202	79	E8LHU40D2	88	E30-2430	188	E215C0727	42	E420R	81
E6LF1	30, 59	E8LHU60D2	88	E30-2440	188	E215C0730	42	E424C	76
E6LFU08D2	86	E8LRU08D2	88	E30CB-24	190	E215C0735	42	E424R	81
E6LFU12D2	86	E8LRU12D2	88	E30CB24	190	E215C0740	42	E428C	76
E6LFU16D2	86	E8LRU16D2	88	E36-24SD	189	E215C1827	43	E428R	81
E6LFU20D2	86	E8LRU20D2	88	E36-24SD-16	189	E215C1830	43	E429C	76
E6LFU30D2	86	E8LRU30D2	88	E36A	131	E215C1835	43	E429F	132
E6LFU40D2	86	E8LRU40D2	88	E36D	134	E215C1840	43	E429P	133
E6LFU60D2	86	E8LRU60D2	88	E36F	132	E218C18SD	43	E430C	77
E6LHU08D2	86	E8LTU08D2	88	E36M	129	E218C0627	42	E434C	77
E6LHU12D2	86	E8LTU12D2	88	E36P	133	E218C0630	42	E440	85
E6LHU16D2	86	E8LTU16D2	88	E36T	130	E218C0727	42	E442	85
E6LHU20D2	86	E8LTU20D2	88	E42A	131	E218C0730	42	E444C	77
E6LHU30D2	86	E8LTU30D2	88	E42F	132	E218C0735	42	E450	97
E6LHU40D2	86	E8LTU40D2	88	E42P	133	E218C0740	42	E460-24	192
E6LHU60D2	86	E8LTU60D2	88	E44-2427	188	E218C1827	43	E520L130	71
E6LK37ICA	19	E9LHU08D2	90	E44-2430	188	E218C1830	43	E520L140	71
E6LK37ICA-EM1	19	E9LHU12D2	90	E44-2440	188	E218C1835	43	E520L2030	71
E6LK38ICAD	19	E9LHU16D2	90	E44CB-24	190	E218C1840	43	E520L2040	71
E6LK38ICAD-EM1	19	E9LHU20D2	90	E44CB24	190	E219C18SD	43	E521L2030	71
E6LK43ICA	18	E9LHU30D2	90	E45-2427	188	E219C0627	42	E521L2040	71
E6LK44ICAD	18	E9LHU40D2	90	E45-2430	188	E219C0630	42	E523L130	71

Index

E523L1140	71	EDIS6	173	FFPC62	196	EKCL4710	38	EL49ICA	96
E524L1130	71	EDL60N	164	FFPEN1	196	EKCL4713	38	EL49LDICA	96
E524L2030	71	EDL61N	164	FFPEN2	196	EKCL4714	38	EL49LDICA-7	96
E524L2040	71	EDL62N	164	FFPGL	196	EKCL4715	38	EL49LDICAS	96
E610	87	EDL63N	164	FFPS21	196	EKCL4716	38	EL49LDRICA	96
E610C	80	EDL81CT3	164	FFPS22	196	EKCL4717	38	EL49RA	96
E610R	82	EDL83CT3	164	EJB4ICA	16, 47, 55, 138, 140, 203	EKCL4721	38	EL55ICA	109
E611	87	EDL8030	164	EJB4ICDXA	17, 64	EKCL4723	38	EL55RICA	109
E612	87	EDL8040	164	EJB4RICA	6, 47, 55, 138, 140, 203	EKCL4741	38	EL56FICA	16, 50, 56, 203
E612C	80	EDL8130	164	EJB4RICDXA	17, 64	EKCL4743	38	EL75FICAS	16, 50, 56, 203
E612R	82	EDL8140	164	EJB44ICA	55, 138, 140	EKCL4759	38	EL75FICDXAS	17, 65
E614C	80	EDL8230	164	EKCL10RIC	30	EKCL6418	39	EL76FICA	16, 50, 56, 82, 203
E614R	82	EDU2	195	EKCL10RICDX	30	EKCL6420	39	EL76FICA-7	50, 82
E616C	80	EDU2-150	195	EKCL21SDD	30	EKCL6427	39	EL76FICDXA	17, 65
E616R	82	EDU2LEDCW	195	EKCL2127D	30	EKCL6429	39	EL99A	104
E617C	80	EDU2LEDWW	195	EKCL2130D	30	EL01SFR	6	EL99AJICA	104
E617R	82	EE22L	176	EKCL2135D	30	EL2SFR	21, 31	EL99FICA	56, 104, 203
E618	87	EE80L	176	EKCL2140D	30	EL3FMR	23, 33	EL99ICA	104
E629F	132	EE80S	176	EKCL2518	31	EL3FMS	23, 33	EL99ICA-G24	104
E629P	133	EE81S	176	EKCL2527	31	EL3SFR	23, 34	EL99LDICA	104
E648F	132	EE85HR	176	EKCL2529	31	EL03SFS	23, 34	EL99RA	104
E648P	133	EE86HG	176	EKCL2541	31	EL3WCR	23, 34	EL99RICA	104
E810	89	EE91LBZ	176	EKCL2588	31	EL4FMR	26, 37	EL99RICA-G24	104
E811	89	EE94HG	176	EKCL2818	31	EL4FMS	26, 37	EL114	113
E812	89	EEL1	176	EKCL2827	31	EL4SFR	27, 37	EL140CT5	53
E818	89	EEL1B	176	EKCL2829	31	EL4SFS	27, 37	EL141CT5	53
E910	90	EEL2	176	EKCL2872	31	EL5FICA	56, 109, 203	EL276ICA	16
E1460-24	192	EEL2EDB	176	EKCL2888	31	EL5ICA	109	EL276ICDXA	17
E1499LDRICEA	96	EEL2DRG	176	EKCL3318	33	EL5ICA-G24	109	EL300	113
E1499LDRICEAS	96	EEL2DRG	176	EKCL3322	33	EL5ICANB	109	EL304	113
E2699LDRICEA	92	EEL2DRG	176	EKCL3327	33	EL5RICA	109	EL308	113
EBA12E	200	EEL2DRG	176	EKCL3329	33	EL7FICA	56, 112, 203	EL311CT3	46
EBA21E	200	EEL2DRG	176	EKCL3341	33	EL7IC100A	112	EL311CT5	46
EC002	161	EEL2DRG	176	EKCL3353	33	EL7ICA	112	EL312CT5	46
EC004	161	EEL2DRG	176	EKCL3393	33	EL7ICA-G24	112	EL313CT5	46
EC006	161	EEL2DRG	176	EKCL3618	32	EL7ICANB	112	EL317	114
EC008	161	EEL2DRG	176	EKCL3620	32	EL7LV	102	EL318	114
EC801	161	EEL2DRG	176	EKCL3622	32	EL7LVICA	102	EL319	114
EC802	161	EEL2DRG	176	EKCL3627	32	EL7RICA	112	EL331CT5	46
EC803	161	EEL2DRG	176	EKCL3629	32	EL7RLV	102	EL332CT5	46
EC804	161	EEL2DRG	176	EKCL3653	32	EL8SQ	118	EL376	114
EC805	161	EEL2DRG	176	EKCL3672	32	EL8SQICA	118	EL376CT5	52
EC806	161	EEL2DRG	176	EKCL3679	32	EL10	118	EL377	114
EC808	161	EEL2DRG	176	EKCL3693	32	EL11	118	EL377CT5	52
EC809	161	EEL2DRG	176	EKCL4111	35	EL12	113, 124	EL386ICA	16
EC817	161	EEL2DRG	176	EKCL4112	35	EL12K	124	EL386ICDXA	17
EC840	161	EEL2DRG	176	EKCL4116	35	EL13	113, 124	EL390ICA	16, 46, 92
EC841	161	EEL2DRG	176	EKCL4118	35	EL13K	124	EL390ICA-7	46, 92
EC880	161	EEL2DRG	176	EKCL4122	35	EL16	113	EL390ICA-EM5	16, 46
ECF	166	EEL2DRG	176	EKCL4125	35	EL17	113	EL390ICDXA	17
ECF41527	53	EEL2DRG	176	EKCL4127	35	EL18	113	EL390RICA	16, 46, 92
ECF41530	53	EEL2DRG	176	EKCL4129	35	EL19	113	EL390RICDXA	17
ECF41535	53	EEL2DRG	176	EKCL4130	35	EL30	113	EL410CT5	48
ECL	166	EEL2DRG	176	EKCL4153	35	EL39A	92	EL410SD	48
ECN6	195	EEL2DRG	176	EKCL4172	36	EL39FICA	16, 46, 56, 203	EL412CT5	48
ECN12	191	EEL2DRG	176	EKCL4179	36	EL39FICA-7	46	EL414CT5	48
ECN14-1	191	EEL2DRG	176	EKCL4188	36	EL39FICA-GU10	56, 203	EL415CT5	47
ECN14-2	191	EEL2DRG	176	EKCL4193	36	EL39FICDXA	17	EL415SD	47
ECNE10	62	EEL2DRG	176	EKCL4212	36	EL39ICA	92	EL416CT5	49
ECNE11	62	EEL2DRG	176	EKCL4216	36	EL39LDICA	92	EL416HLCT5	49
ECT	165	EEL2DRG	176	EKCL4218	36	EL39LDICA-7	92	EL417CT5	48
EDF11WW	196	EEL2DRG	176	EKCL4222	36	EL39LDRICA	92	EL419	114
EDF12WW	196	EEL2DRG	176	EKCL4227	36	EL39RA	92	EL423CT5	120
EDF21WW	196	EEL2DRG	176	EKCL4229	36	EL40	113	EL425CT5	120
EDGLIT1	176	EEL2DRG	176	EKCL4253	37	EL48FICA	16, 47, 56, 203	EL427CT5	48
EDGLIT2	176	EEL2DRG	176	EKCL4282	37	EL49A	96	EL431CT5	48
EDGREC1	176	EEL2DRG	176	EKCL4284	37	EL49FICA-GU10	56, 203	EL439CT5	48
EDGREC2	176	EEL2DRG	176	EKCL4357	39	EL49FICDXA	17, 64	EL441CT5	49

Index

EL442CT3	49	EL610CT5	51	EL918RICA	124	EL1579	103	EL2915	107
EL442CT5	49	EL610SD	51	EL925	105	EL1597	103	EL2982	108
EL446CT5	49	EL611CT5	51	EL926	105	EL2312	95	EL2983	108
EL446HLCT5	49	EL612CT5	51	EL930	105	EL2313	95	EL2984	108
EL455CT5	47	EL613CT5	52	EL936ICA	124	EL2320	95	EL2985	108
EL456CT5	49	EL614	124	EL946ICA	125	EL2321	94	EL2993	107
EL460CT5	48	EL615	124	EL970ICA	121	EL2322	95	EL2994	108
EL470ICA	120	EL615CT5	50	EL970RICA	121	EL2324	95	EL2999	108
EL470RICA	120	EL615SD	51	EL971ICA	122	EL2382	95	EL4411	44
EL475CT5D	64	EL616	124	EL971RICA	122	EL2384	95	EL4412	44
EL476	114	EL616CT5	52	EL977	105	EL2388	95	EL4424	44
EL476CT5	52	EL616K	124	EL985	105	EL2393	95	EL4426	44
EL477	114	EL617	125	EL988	105	EL2395	95	EL4490	44
EL477CT5	52	EL617CT5	50	EL990	105	EL2396	95	EL4492	44
EL485ICA	16	EL618	124	EL991	106	EL2411	100	EL4493	44
EL485ICDXA	17	EL621CT5	52	EL992	106	EL2412	100	EL4499	44
EL490AJICA	16, 47	EL622	124	EL993	106	EL2415	100	EL4511	44
EL490AJICDXA	17	EL622K	125	EL993K	106	EL2416	100	EL4512	44
EL490ICA	16, 47, 81, 96	EL623	125	EL994	106	EL2420	100	EL4515	44
EL490ICA-7	47, 81, 96	EL624	125	EL994D	106	EL2421	100	EL4584	44
EL490ICA-EM5	16, 47, 96	EL625CT5	51	EL995	106	EL2424	100	EL4592	44
EL490ICDXA	17, 64	EL626	125	EL998	106	EL2426	100	EL4593	44
EL490ICDXA-EM5	64	EL627CT5	51	EL999	107	EL2429	100	EL5000	202
EL490RICA	16, 47, 81, 96	EL637CT5	51	EL999K	106	EL2440	101	EL5001	202
EL490RICDXA	17, 64	EL642	125	EL1212CT5	53, 118	EL2443	101	EL5002	202
EL492FICAS	47, 56, 203	EL655CT5	50	EL1411	98	EL2445	101	EL5003	202
EL492ICA	16, 47	EL661CT5	52	EL1412	98	EL2452	101	EL5004A	202
EL492ICA-7	47	EL662CT5	52	EL1415	98	EL2453	101	EL5004B	202
EL492RICA	47	EL670CT5	51	EL1416	98	EL2482	101	EL5007	202
EL497SDW2	49	EL685CT5D	65	EL1419	98	EL2484	101	EL5013	202
EL511	109	EL713CT5	121	EL1420	98	EL2487	101	EL5016	202
EL511CT5	121	EL714CT5	121	EL1421	98	EL2488	101	EL5018	202
EL512	109	EL715CT5	121	EL1422	98	EL2493	101	EL5019	202
EL512CT5	121	EL716	117	EL1423	98	EL2494	101	EL6000	202
EL512K	109	EL716CT5	121	EL1426	99	EL2495	101	EL6003	202
EL513	110	EL760ICA	16, 50, 102	EL1429	99	EL2497	101	EL6013	202
EL514	110	EL760ICA-7	50, 102	EL1430	99	EL2510	102	EL6018	202
EL515	110	EL760ICDXA	17, 65	EL1433	99	EL2511	102	EL9111	107
EL516	110	EL760ICDXAEM	65	EL1444	99	EL2516	102	EL9112	107
EL517	110	EL760RICA	16, 50, 102	EL1445	99	EL2530	102	EL9113	107
EL518	110	EL760RICDXA	17, 65	EL1452	99	EL2550	103	EL9115	107
EL518ICA	123	EL761CT5	122	EL1453	99	EL2579	103	EL9116	107
EL518RICA	123	EL762CT5	122	EL1488	99	EL2597	103	EL33127	46
EL519	110	EL763CT5	122	EL1491	100	EL2612	93	EL39727	46
EL522	110	EL764CT5	122	EL1493	99	EL2613	93	EL39730	46
EL530	110	EL770ICA	16, 50, 82, 102	EL1495	100	EL2619	93	EL41027	48
EL542	110	EL770ICA-7	50, 82, 102	EL1497	100	EL2620	93	EL41030	48
EL546	110	EL770ICA-EM5	50	EL1499A	97	EL2621	93	EL41035	48
EL550	123	EL770ICDXA	17, 65	EL1499AJICEA	97	EL2622	93	EL41040	48
EL552CT5	52	EL770ICDXAEM	65	EL1499EA	97	EL2633	94	EL41427DX	64
EL555	123	EL770RICA	16, 50, 82, 102	EL1499ES	97	EL2644	94	EL41430DX	64
EL560	123	EL770RICA-7	82	EL1499ICA	97	EL2652	94	EL41435DX	64
EL560ICA	16, 50	EL770RICDXA	17, 65	EL1499ICEA	97	EL2653	94	EL41527	47
EL560RICA	16, 50	EL816	117	EL1499LDICA	96	EL2688	94	EL41530	47
EL561	123	EL881CT5	53	EL1499LDICAS	96	EL2693	94	EL41535	47
EL570ICA	16, 50	EL881CT5W	118	EL1499LDICEA	96	EL2695	94	EL41540	47
EL570ICA-7	50	EL901	104	EL1499LDICEAS	96	EL2696	94	EL41550	47
EL570RICA	16, 50	EL901HT	126	EL1499LDRICA	96	EL2698	94	EL41727	48
EL576	110	EL901ICA	125	EL1499LDRICAS	96	EL2699A	93	EL41730	48
EL590ICA	121	EL901RICA	125	EL1499RA	97	EL2699EA	93	EL41735	48
EL590RICA	121	EL901RT	126	EL1499REA	97	EL2699ICA	93	EL41740	48
EL601	124	EL902	104	EL1499RES	97	EL2699ICEA	93	EL44127	49
EL602	126	EL911	104	EL1499RS	97	EL2699LDICA	92	EL44727	49
EL603	126	EL912	104	EL1499S	97	EL2699LDICEA	92	EL44727DX	64
EL604	126	EL913	105	EL1510	103	EL2699LDRICA	92	EL44730	49
EL606	126	EL915	105	EL1516	103	EL2699RA	93	EL44730DX	64
EL607	126	EL916	105	EL1530	103	EL2699REA	93	EL44730W2	49
EL608	126	EL918ICA	124	EL1550	103	EL2912	107	EL49530D	64

Index

EL49540D	64	ELBRMD	68	ELK0730-FC	15	ELK4112	24	ELM300	115
EL49727	49	ELBRMD-EM5	68	ELK0735	15	ELK4116	24	ELM301	115
EL49727BZ2	49	ELBRT	68	ELK0735-FC	15	ELK4118	24	ELM302	115
EL49727DX	64	ELD14CT5	141	ELK0740	15	ELK4120	24	ELM303	116
EL49727W2	49	ELD16CT5	141	ELK0740-FC	15	ELK4122	24	ELM305	116
EL49730	49	ELD46ICA	44	ELK0827-12	20	ELK4125	24	ELM500	111
EL49730BZ2	49	ELD47ICA	44	ELK0827-24	20	ELK4127	24	ELM501	111
EL49730DX	64	ELD11030	141	ELK0827-NSP	15	ELK4129	24	ELM530	111
EL49730W2	49	ELD11040	141	ELK0830-12	20	ELK4130	25	ELM530K	111
EL59727	52	ELD11430	141	ELK0830-24	20	ELK4153	25	ELM5045	111
EL59730	52	ELD21030	141	ELK0830-NSP	15	ELK4172	25	ELMAT001	206
EL61027	51	ELD21040	141	ELK0924	15	ELK4179	25	ELMAT002	206
EL61030	51	ELD21230	141	ELK0927	15	ELK4193	25	ELMAT003	206
EL61140	51	ELD21240	141	ELK0930	15	ELK4212	26	ELMAT004	206
EL61327	52	ELD31430	141	ELK0935	15	ELK4216	25	ELP40	116
EL61527	50	ELD31440	141	ELK0940	15	ELK4218	25	ELR68530	62
EL61530	50	ELD32230	141	ELK1124	15	ELK4220	26	ELRH7T	117
EL61535	50	ELD32240	141	ELK1127	15	ELK4222	26	ELRH8T	117
EL61540	50	ELD32630	141	ELK1130	15	ELK4227	26	ELS30	116
EL61550	50	ELD32640	141	ELK1135	15	ELK4229	25	ELS42	116
EL61740	50	ELH7T	117	ELK1140	15	ELK4253	26	ELS426	116
EL62127	52	ELIG250	181	ELK1327	15	ELK4282	26	ELS520	111
EL62527	51	ELIG330	181	ELK1330	15	ELK4284	26	ELS530	111
EL62535	51	ELIG330250	181	ELK1335	15	ELK4293	26	ELS530K	111
EL62540	51	ELIGRH	181	ELK1340	15	ELK4347	28	ELS5030	111
EL62727	51	ELJ40V .16, 17, 19, 47, 55, 64, 203		ELK1927D	18	ELK4349	28	ELSF11CT5	140
EL69535DC	65	ELJ4S	138, 140	ELK1930D	18	ELK4357	28	ELSF40CT5	140
EL69727	52	ELJ242	202	ELK1935D	18	ELK4710	27	ELSF1127	140
EL69727BZ2	52	ELJ242CVR	202	ELK1940D	18	ELK4713	27	ELSF4030	140
EL69727DX	65	ELJ332	138, 140	ELK2127D	18	ELK4714	27	ELSP12CT5	138
EL69727W2	52	ELJ443	55, 138, 140	ELK2127D-FC	18	ELK4715	27	ELSP22CT5	138
EL69730	52	ELJ42230	55	ELK2130D	18	ELK4716	27	ELSP43CT5	138
EL69730BZ2	52	ELK08CT5	15	ELK2130D-FC	18	ELK4717	27	ELSP63CT5	138
EL69730DX	65	ELK08SD-12	20	ELK2135D	18	ELK4719	27	ELSP63DXCT3	140
EL69730W2	52	ELK09SD	15	ELK2135D-FC	18	ELK4721	28	ELSP66CT5	138
ELA95	114	ELK10CT5	15	ELK2140D	18	ELK4723	28	ELSP83DXCT3	140
ELA99	114	ELK10DX27	17	ELK2140D-FC	18	ELK4741	28	ELSP1224CT5	139
ELA101	114	ELK10DX30	17	ELK2427D	18	ELK4743	28	ELSP1248CT3	139
ELA105	115	ELK10DX35	17	ELK2430D	18	ELK4759	28	ELSP2448CT3	139
ELA501	110	ELK10DX40	17	ELK2435D	18	ELK5421	29	ELSP4430	138
ELA599	111	ELK10DXSD	17	ELK2440D	18	ELK5493	29	ELSP4440	138
ELA5099	111	ELK11HC	15	ELK2518	21	ELK6418	29	ELSP8327	138
ELB4EH	67	ELK11SD	15	ELK2527	21	ELK6420	29	ELSP8830	138
ELB4EH-EM5	67	ELK19SD	18	ELK2529	21	ELK6429	29	ELSP8840	138
ELB4PF	67	ELK72FICA	19	ELK2541	21	ELK6710	29	ELSPPD	139
ELB4PF-EM5	67	ELK73FICAD	19	ELK2588	21	ELK6713	29	ELSPRM	139
ELB6EH	67	ELK93FICA	19	ELK2818	21	ELK6715	29	ELST1	186
ELB6EH-EM5	67	ELK94FICAD	19	ELK2827	21	ELK6829	29	ELST10	186
ELB6PF	67	ELK215	21, 31	ELK2829	21	ELL4810	108	ELST27CT3	183
ELB6PF-EM5	67	ELK308	23, 34	ELK2872	21	ELL4812	108	ELST28CT3	183
ELB8PF	67	ELK315	23, 34	ELK2888	21	ELL4813	108	ELST29CT3	183
ELB8PF-EM5	67	ELK0327	15	ELK3318	22	ELL4814	108	ELST31	182
ELB15RCT5ICA	69	ELK0330	15	ELK3322	22	ELL4815	108	ELST32	182
ELB30R30	69	ELK370	23, 34	ELK3327	23	ELL4816	108	ELST37	182
ELB30R35	69	ELK381	23, 34	ELK3329	22	ELL4817	108	ELST42	186
ELB30R40	69	ELK408	27, 37	ELK3341	23	ELL4819	108	ELST43	186
ELB44SQEH	67	ELK415	27, 37	ELK3353	23	ELL6810	116	ELST64	183
ELB44SQEH-EM5	67	ELK430	27	ELK3393	23	ELL6812	116	ELST65	183
ELB44SQPF	67	ELK434	27	ELK3618	22	ELL6813	116	ELST66	183
ELB44SQPF-EM5	67	ELK445	27, 37	ELK3620	22	ELL6815	116	ELST69	183
ELB50R30	69	ELK459	27, 37	ELK3622	22	ELM30	115	ELST74	183
ELB50R35	69	ELK610	29	ELK3627	22	ELM40	115	ELST75	183
ELB50R40	69	ELK629	29	ELK3629	22	ELM42	115	ELST76	183
ELB410	69	ELK693	29	ELK3653	22	ELM43	115	ELST81	182
ELB440	69	ELK0724	15	ELK3672	22	ELM45	115	ELST82	182
ELB610	69	ELK0727	15	ELK3679	22	ELM46	115	ELST83	182
ELB629	69	ELK0727-FC	15	ELK3693	22	ELM47	115	ELST84	182
ELB810	69	ELK0730	15	ELK4111	24	ELM48	115	ELST85	182

Index

ELST8430	184	EP801	159	EPS13	192	ERT61230	61	ET570	150
ELST8440	184	EP802	159	EPS14	192	ERT61240	61	ET578L30	143
ELST8530	184	EP803	159	EPS26	191	ERT66130	61	ET579L30	144
ELST8540	184	EP804	159	EPS27	191	ERT66140	61	ET579L35	144
ELST8630	184	EP805	159	EPS28	191	ERT81230	62	ET580D	143
ELST8640	184	EP806	159	EPS29	191	ESF475U	136	ET591	145
ELST8730	184	EP807	163	EPSD1	192	ESF685U	136	ET597	143
ELST8740	184	EP808	159	EPSD2	192	ESF4271	136	ET612D	143
ELST9130	184	EP809	159	EPSD3	192	ESF6371	136	ET613-35D	143
ELST9140	184	EP810	159	EPSD19	190	ET226	147	ET613-40D	143
ELST9230	185	EP811	162	EPSD20	190	ET502	148	ET613D	143
ELST9240	185	EP812	159, 161	EPSD21	189	ET507	148	ET615CT3D	143
ELST9330	185	EP814	162	EPSD21CB	190	ET526	148	ET616-27D	143
ELST9340	185	EP815	162	EPSD22	189	ET526-12	151	ET616CT3D	143
ELST9430	185	EP816	162	EPSD22-120	189	ET526-18	151	ET617CT3D	143
ELST9440	185	EP817	159	EPSD22CB	190	ET526-24	151	ET618CT3D	145
ELST9530	184	EP818	163	EPSD23	189	ET526-36	151	ET619CT3D	145
ELST9540	184	EP819	162	EPSD23-2	190	ET526-48	151	ET620CT3D	145
ELST9630	185	EP820	162	EPSD23CB	190	ET526-75	148	ET621CT3D	145
ELST9640	185	EP821	162	EPSD24	190	ET528	148	ET629	154
ELST9730	185	EP822	162	EPSD25	190	ET528-12	151	ET630	154
ELST9740	185	EP824	163	EPSD26	190	ET528-18	151	ET631	154
ELST9830	185	EP825	160	EPSD27LCB	190	ET528-24	151	ET634	154
ELST9840	185	EP827	160	EPSD28XCB	190	ET528-36	151	ET635	154
ELST9930	184	EP836	163	ERT2HL08CT5	58	ET528-48	151	ET636	154
ELTRV1051	207	EP840	160	ERT2HL10CT5	58	ET528-75	148	ET637	154
ELTRV1055	207	EP841	160	ERT2L06CT5	58	ET530	148	ET639	155
ELTRV1059-A	207	EP844	163	ERT2R	58	ET530-12	151	ET641	155
ELTRV1060-A	207	EP845	163	ERT4L10CT5	58	ET530-18	151	ET642	155
ELW	166	EP848	163	ERT22SQ	58	ET530-24	151	ET647	155
EMP4	59	EP850	160	ERT41DXCT5	60	ET530-36	151	ET650	155
EMP6	59	EP880	160	ERT61DXCT5	61	ET530-48	151	ET654	155
EMP8	59	EP882	163	ERT81DXCT5	62	ET531	148	ET657	155
EP002	159	EP883	164	ERT210	58	ET532	149	ET658	156
EP004	159	EP884	164	ERT210CT5	59	ET532-12	151	ET659	156
EP006	159	EP885	164	ERT213CT5	59	ET532-18	151	ET660	156
EP008	159	EP901	163	ERT214	58	ET532-24	151	ET662	156
EP012	159	EP903	163	ERT214CT5	59	ET532-36	151	ET665	158
EP12X	159	EP904	163	ERT215CT5	59	ET532-48	151	ET666	158
EP222	162	EP905	163	ERT218CT5	59	ET532-75	149	ET667	158
EP300	162	EP906	163	ERT311CT5	59	ET534	149	ET671	156
EP322	162	EP918	163	ERT317CT5	59	ET534-12	151	ET686	156
EP323	162	EP924	163	ERT318CT5	59	ET534-18	151	ET687	157
EP324	162	EP936	163	ERT411CT5	59	ET534-24	151	ET690	157
EP333	162	EP948	163	ERT412CT5	59	ET534-36	151	ET694	157
EP422	162	EP960	163	ERT413CT5	60	ET534-48	151	ET695	157
EP444	162	EP979	160	ERT413CT5DX	60	ET534-75	149	ET696	157
EP555	146	EP989	163	ERT415	58	ET537	149	ET699	158
EP666	146	EP2015	166	ERT415CT5	60	ET549	149	ET740	143
EP702	162	EPC2	195	ERT416CT5	60	ET551	149	ET741	143
EP710	49, 52	EPCH	195	ERT425CT5	60	ET558	149	ET742	143
EP711	49, 52	EPCLED	195	ERT441CT5	60	ET558-12	152	ET743-35D	144
EP712	49, 52	EPD-2	195	ERT445	58	ET558-18	152	ET743D	144
EP713C	7, 9	EPD-4	195, 196	ERT475CT5D	60	ET558-24	152	ET744-35D	144
EP714C	9	EPD-6	195	ERT495CT5DX	60	ET558-36	152	ET744D	144
EP715C	7, 9	EPD-7	196	ERT611CT5	60	ET558-48	152	ET745-35D	144
EP716	13	EPD-8	196	ERT612CT5	61	ET559	150	ET745D	144
EP717	13	EPD475U	136	ERT613CT5	61	ET562	150	ET746-35D	144
EP718	13	EPD685U	136	ERT613CT5DX	61	ET563	150	ET746D	144
EP731C	40	EPD4271	136	ERT615CT5	61	ET565	150	ET750D	144
EP732C	40	EPD6371	136	ERT625CT5	61	ET565-12	152	ET752-35D	144
EP733C	40	EPEN	195	ERT661CT5	61	ET565-18	152	ET752-40D	144
EP734C	40	EPIN	195	ERT685CT5D	61	ET565-24	152	ET756D	144
EP735C	40	EPMT	195	ERT695CT5DX	61	ET565-36	152	ET757D	144
EP736C	40	EPN2	195	ERT44130	60	ET565-48	152	ET1158	157
EP737C	40	EPN11	192	ERT44140	60	ET566	150	ET1528	150
EP738C	40	EPS2	195	ERT61130	60	ET567	150	ET1604	153
EP800	162	EPS12	192	ERT61140	60	ET568	150	ET1625	153

Index

ET1626	153	EUBCRD	168	EUDRV72	170	JBOXCV	199	PSA29	198
ET1628	153	EUBJBX	168	EUDS1	171	JC-25	201	PSA30	198
ET1630	153	EUCRD	192, 200	EUL12-3	200	JC-50	201	PSA31	198
ET1632	153	EUD11CW	172	EUL21-3	200	JC-50-12V	201	PSA32	198
ET1634	153	EUD12WWW	172	EUL24-3	200	KEM-ELSW	139	PSA33	198
ET1687	153	EUD14CW	172	EUL32-3	200	KEM-ERT	30, 56, 62, 204	PSA34	199
ET1728	153	EUD14WWW	172	EUL42-3	200	KEM-LD1	56, 204	PSA37	92, 102, 200
ET62130D	145	EUD24CW	172	EUM21	170	KEM-LD2	56, 204	PSA37-27	92, 102
ET62530D	144	EUD24WWW	172	EUM22	170	KEM-LD3	56, 204	PSA37-35	92, 102
ET62630D	144	EUD31	193	EUM31	171	KEM-LD4	56, 204	PSA37-40	92, 102
ET62730	145	EUD32	193	EUM33	171	KEM-LD5	56, 204	PSA38	40
ET62830D	145	EUD33	193	EUM34	171	KEM-LD7	204	PSA38-4	40
ET75830D	144	EUD34	193	EUM41	169	L4	176, 201	PSA38-22	40
ETL21CT3	146	EUD35	193	EUM41DXW	65, 169	L28	198	PSA41-40	200
ETL2130	146	EUD36	193	EUM42	169	L38	198	PSE26	198
ETL2140	146	EUD37	193	EUM42DXW	65, 169	L39	198	PST1	182
ETLD526	147	EUD3230	170	EUM42DXW-7	65	L40	198	PST2L	182
ETLD528	147	EUD3330	170	EUM43	169	L41	198	PST4	182
ETLD530	147	EUD3430	170	EUM43DXW	65, 169	L42	198	PST5	182
ETLD532	147	EUD3530	170	EUM43DXW-7	65	L44	198	PST80	182
ETLD534	147	EUD3630	170	EUM44	169	L45	40	PWH2E1	202
ETLD558	148	EUD3730	170	EUM44DXW	65, 169	L46	40	R9H	112
ETR12	7, 196	EUDC2	172	EUM44DXW-7	65	L47	40	R9ICA	112
ETR12-20	7, 196	EUDC3	172	EUM45	169	L49	40	R10H	112
ETR-277	196	EUDC4	172	EUM45DXW	65, 169	L50	40	RM1	7, 9
ETRK20	196	EUDC21	172	EUM45DXW-7	65	L51	40	RM1TL	9
ETRK50	196	EUDC22	172	EUMC24	170	L52	40	RM2	13
ETRK60E	196	EUDC31	170	EUMC36	170	L53	40	RM3	201
ETT	165	EUDC51	171	EUMCS1	170	L54	40	RM4	201
ETV	166	EUDCCT	171	EUMS1	170	L55	40	RM5	201
ETW42CT3	146	EUDCL1	172	EUN51	171	L57	40	RM7	201
ETW42CT5	146	EUDCL2	172	EUN52	171	L60	9	RM11	7, 9
ETW43CT3	146	EUDCRD	170	EUN53	171	L61	9	RM22	13
ETW44CT5	146	EUDCS1	172	EUS8L	174	L-BRCKT	200	RP-1B	199
ETW46CT3	146	EUDCS21	172	EUS14L	174	L-BRCKT4	200	RP7	201
ETW4240	146	EUDCS31	170	EUS21L	174	L-BRCKT5	200	RP8W	202
EU3T08	168	EUDEN31	193	EUS24W	174	LET-60	7, 196	RP9W	202
EU3T12	168	EUDEN32	193	EUS28L	174	LET-60-277	7, 196	RR9H	112
EU3T16	168	EUDEN33	193	EUS41	171	LET-60DX	7, 196	RR9ICA	112
EU3T24	168	EUDEN34	193	EUS43	171	LET-60DX-277	7, 196	RR10H	112
EU3T32	168	EUDEN35	193	EUS45	171	LET-60H	7, 196	RTNRTRK1	198
EU3TC6	168	EUDEN36	193	EUS47	171	LET-75	196	RTNRTRK2	198
EU3TPC	168	EUDEN37	193	EUSC6	171, 174	MR16LD	200	SPRING	199
EUB11CT5	168	EUDJBX	170	EUSC12	171, 174	MR120-GU10	153	T-SWITCH	56, 204
EUB11L30	168	EUDL31	193	EUSC24	171, 174	MR120-GU10LD	153, 200	T-SWITCH-LD1	56, 204
EUB11L40	168	EUDL31C	193	EUSC36	171, 174	OM4	201	T-SWITCH-LD5	56, 204
EUB12CT5	168	EUDL33	193	EUSPC	171, 174	OM5	201	WB-5-Z	195, 201
EUB12L30	168	EUDL33C	193	EW44-2427	191	OVM7	201	WB-10-Z	195, 201
EUB14L30	168	EUDL34	193	EW44-2430	191	OVP7	201	WB-10-ZF	195
EUB14L40	168	EUDL34C	193	EW44-2440	191	P006S	199	WB-18-Z	201
EUB18CT5	168	EUDL35	193	EW45-2427	191	P010S	199	WS40	178
EUB18L30	168	EUDL35C	193	EW45-2430	191	P010T	199		
EUB22CT5	168	EUDL36	193	EW45-2440	191	P011S	199		
EUB22L40	168	EUDL36C	193	EWM25W30	178	P012S	199		
EUB29CT5	168	EUDMS1	171	EWP30S40	178	P016S	199		
EUB29L30	168	EUDMT31	193	EWP45M50	178	P024S	199		
EUB29L40	168	EUDMT32	193	EWP70M50	178	P113E1	56, 202, 204		
EUB32CT5	168	EUDMT33	193	EWP90L40	178	P126E1	202		
EUB36CT5	168	EUDMT34	193	EWP90L50	178	P142EU	202		
EUB36L30	168	EUDMT35	193	EWPPHB1	179	P240E1	202		
EUB36L40	168	EUDMT36	193	EWPPHBU	179	P255E1	202		
EUB48CT5	168	EUDMT37	193	EWPPHSU	179	PAR30FSLD	200		
EUB48L30	168	EUDP1	172	FB27	67, 186, 199	PAR38FLD	200		
EUB48L40	168	EUDPC	171	FIRECVR	56, 203	PR2	13		
EUBCO3	168	EUDPH1	171	FIREENCL	56, 203	PR22	13		
EUBCO6	168	EUDRV18	170, 172	FIREENCL-S	56, 203	PSA21	198		
EUBC12	168	EUDRV18-2	172	FIRETAPE	56, 203	PSA25	198		
EUBC24	168	EUDRV60-2	172	HB24	186, 199	PSA27	198		

The **Quality** Choice



The **Leading** Choice



The **Timely** Choice



The **Contractor's** Choice



The **Trusted** Choice

Over two and a half decades ago, in the heart of Los Angeles, ELCO Lighting was founded on the philosophy that high quality lighting products should be sold at a fair market price. Our commitment to this philosophy and dedication to exceptional customer service serve as the very soul of our company. We take pride in our perpetual commitment to such standards that enable

us to continually prosper in a highly competitive and unpredictable industry. With our expanding LED product line that entails recessed, track, undercabinet, outdoor and emergency lighting, we are ready to fulfill a variety of lighting demands. Quality engineering, fair market value, professional customer service, and micro-managed inventory are the cornerstones of ELCO Lighting.



Corporate Headquarters

2042 E. Vernon Ave.
Vernon, CA 90058
Tel: 323.231.2600
Fax: 323.231.3200
elcolighting.com

Customer Service

Tel: 800.522.2626
Fax: 800.644.2626
orderdesk@elcolighting.com
customerservice@elcolighting.com
sales@elcolighting.com

Printed in the U.S.A.
\$20.00

RV. 03/24

© ELCO Lighting. The marks appearing in this catalog are registered trademarks of ELCO Lighting. Other marks used herein are recognized trademarks of their respective companies. Products shown in this brochure may be covered by U.S. and international patents. Specifications subject to change without notice.