
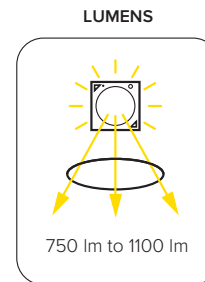
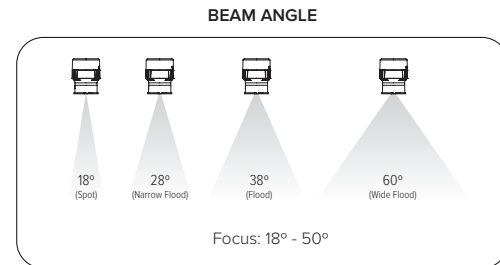



The Koto Sylo™ System

Surface, Monopoint, Pendant & Track Head

with The Koto™ Module



2" Koto™ Sylo™

Works with Koto™ Standard LED Module & Koto™ Focus LED Module

- Modern Die-Cast aluminum fixture for easy maintenance and upgrades
- Sunset option dims from 3000K to 1800K

- Includes: Standard 38° lens, with 28° and 60° lenses. Optional: 15° and 18° lenses available
- Energy Star Certified. Title 24 JA8-2019 Compliant
- Life span of 50,000 hours L70

Sylo™ Monopoint

Input Power	10W - 12.5W
Lumens	750 - 1100
Color Temp.	2700K - 4000K, Sunset & 5-CCT
CRI	95+
Dimmable	Triac/ELV
Beam Angle	Standard: 25°, 38°, 60°. Optional: 18°



Sylo™ Pendant

Input Power	10W - 12.5W
Lumens	750 - 1100
Color Temp.	2700K - 4000K, Sunset & 5-CCT
CRI	95+
Dimmable	Triac/ELV
Beam Angle	Standard: 25°, 38°, 60°. Optional: 18°


LED Die-Cast Aluminum Pendants include a Flat Canopy



*Cable is 120" long field cuttable

Sylo™ Track Head


Input Power	10W - 12.5W
Lumens	750 - 1100
Color Temp.	2700K - 4000K, Sunset & 5-CCT
CRI	95+
Dimmable	Triac/ELV
Beam Angle	Standard: 25°, 38°, 60°. Optional: 18°

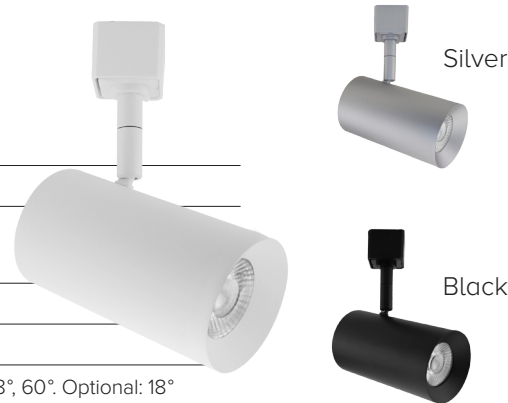

*For Track & Track Accessories Visit elcolighting.com

Sylo™ Surface Mount

Input Power	10W - 12.5W
Lumens	750 - 1100
Color Temp.	2700K - 4000K, Sunset & 5-CCT
CRI	95+
Dimmable	Triac/ELV
Beam Angle	Standard: 25°, 38°, 60°. Optional: 18°

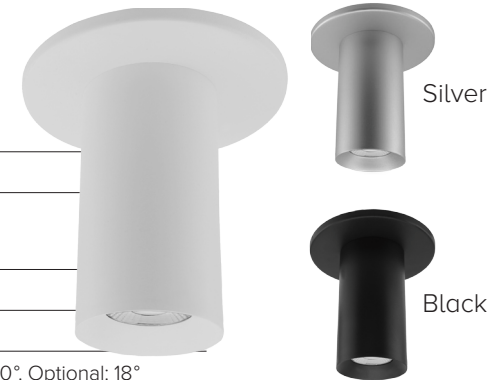

Accessories

Spread Lens



Linear Lens




Frosted Diffuser



Color Shifter



Hex Louver



White & Black Snoot

