



The **Ply**TM System



0-10V Dimmable LED Recessed Fixtures

4" & 6" 0-10V Dimmable **LED Inserts**

4" & 6" Retrofit **LED Inserts**

The ELCO PlyTM System is a simple yet effective 0-10V dimming solution for recessed LED lighting. With deep-set trims to minimize glare, adjustable beam angles to maximize ambiance, and color finishes to match any commercial project, this system is easily winning rave reviews. High lumen outputs, Switch to choose desired Lumen Output, CCT options, and simple installation -- that's the PlyTM System.

The Ply™ System

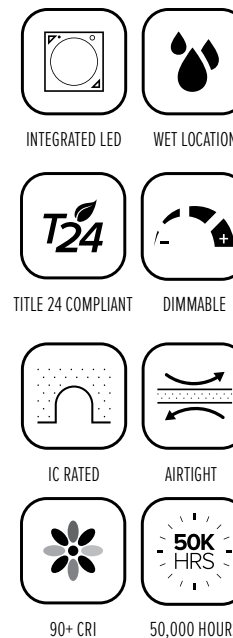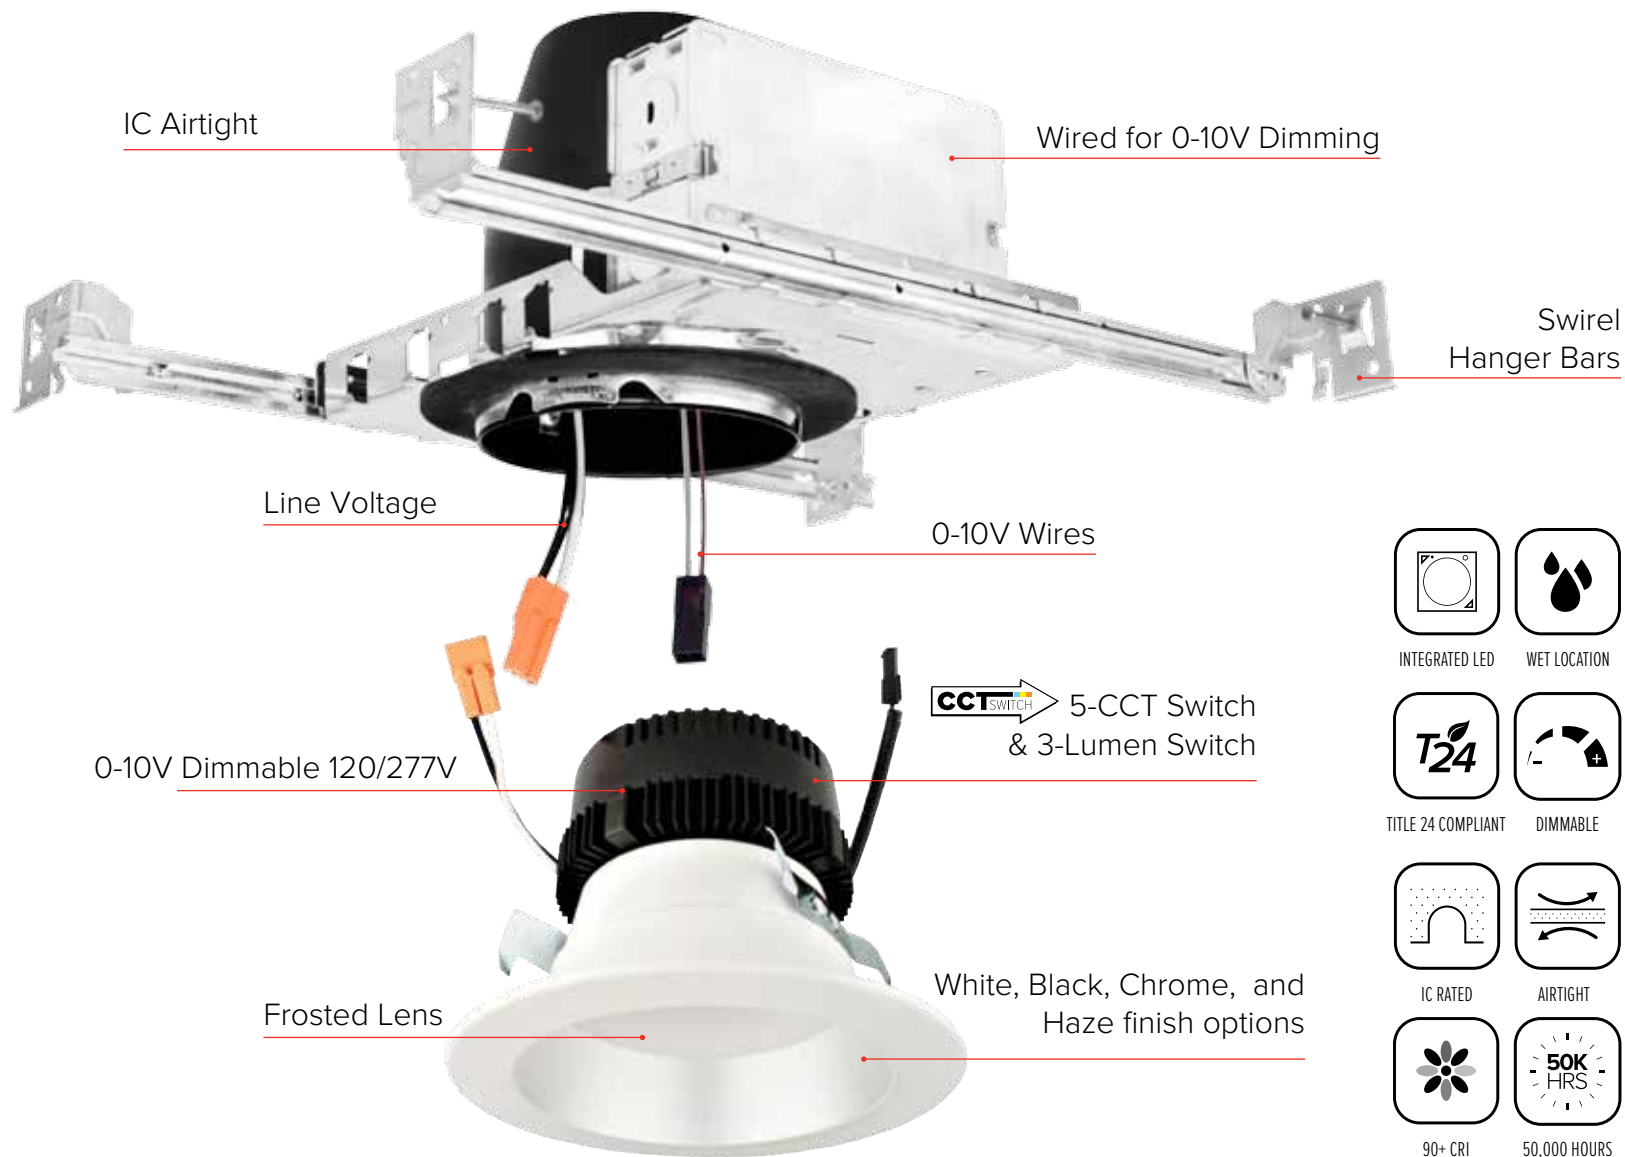

Ply™ 0-10V Dimmable LED & Housings

- 0-10V Dimming
- 120/277V Input
- CA Title 24, UL Listed, ENERGY STAR, JA8-2016-E
- Life Span of 50,000 hours L70

- Soft white lens provides smooth lumen distribution and eliminates LED pixelation
- Deep set LED trim reduces glare while providing even illumination
- 93+ CRI for extremely accurate color rendering

4" & 6" 0-10V LED Inserts

Input Power	9.5W - 24W
Lumens	850 - 2000 lm
Color Temp.	2700K - 5000K
CRI	90+
Wet Location	UL listed
Dimmable	0-10V



4" & 6" 0-10V Adjustable LED Inserts

Input Power	12.6W
Lumens	850 - 900
Voltage	120/277V
Color Temp	2700K - 3000K
Dimmable	0-10V/Triac/ELV
CRI	93+
Damp Loc	Listed



0-10V Dedicated LED Housings

4" & 6" Ply™ Retrofit LED Inserts

- 0-10V/Triac/ELV Dimming
- 120/277/347V Input
- 5-CCT Switch
- Eliminates the need for housing

- New Construction application optional mounting plate or frame
- IC Airtight for use with direct contact to insulation
- Designed to fit in plenums as shallow as 4"
- Includes driver and JBox

4" 0-10V/Triac/ELV LED Downlight

Input Power	11W
Lumens	750 lm
Color Temp.	2700K - 5000K
CRI	90+
Wet Location	UL listed
Dimmable	0-10V/Triac/ELV



4" 0-10V/Triac/ELV LED Downlight



Input Power	12/15/18/22/25W
Lumens	1000/1250/1500/ 1800/2000 lm
Color Temp.	2700K - 5000K
CRI	90+
Wet Location	UL listed
Dimmable	0-10V/Triac/ELV
Input Volt	120-277V

6" 0-10V/Triac/ELV LED Downlight


Input Power	12W
Lumens	950 lm
Color Temp.	2700K - 5000K
CRI	90+
Wet Location	UL listed
Dimmable	0-10V/Triac/ELV



- New Construction Universal Frame with Captive Hanger Bars for Downlights
- For use with 2", 4" or 6" Round Downlights



- New Construction Plaster Frame with Captive Hanger Bars for LED Ultra Slim Panel Lights



New Construction Frames

- New construction mounting plate for 6" LED Round Downlights