


4" Square Wall Wash Reflector LED Light Engine Trims

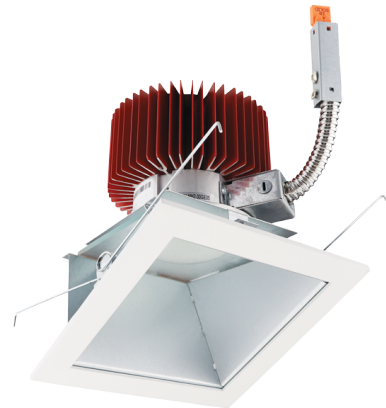


Features

- Light Engines feature premium LED COB.
- Strong and smooth lumen output.
- Color temperatures from 2700K to 5000K or Sunset Dimming option.
- 2 at the end of the item number denotes Generation 2. Please note Gen 2 and Gen 1 are not cross compatible.

Specifications

Wattage	8.8W - 36.8W
Lumens	850 lm - 4000 lm
Color Temp.	2700K - SunsetK
Lamp Type	LED
CRI	93+
Wet Location	Listed

Dimensions

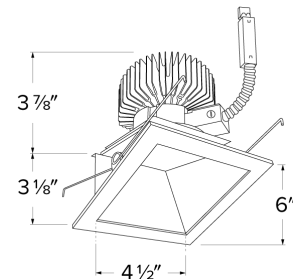

Technical Details

Optics: Glass lens diffuses light evenly throughout while reducing glare with LED technology.

Reflector Construction: Reflector is one piece, deep, self-flanged construction spun from .05" thick High Grade Aluminum. Reflector allows for minimal glare and a strong glare cut-off.

Installation: Must be installed on a Laurel System frame with compatible lumen rating. Frames are available for New Construction, Remodel and as a Retrofit Kit.

LED Technology:

- Extremely accurate Color Rendering Index of 93+ CRI.
- Efficacy of >90 lumens per watt.
- Lumen Maintenance of 50,000 hours L70 Life based on LM80 standardized test results.
- Superior Thermal Management by utilizing ELCO Red heat sink.
- Instant On to Full Brightness technology.
- No LED pixilation.

Sunset: Sunset color temperature is our dim-to-warm LED technology that allows the color temperature to become warmer as the product is dimmed. Our SUNSET items start at 3000K and go as low as 1800K when dimmed. For Sunset dim technology be sure to order an item with "Sunset" in the Color Temperature (CCT) attribute.

Listings: cULus Listed for Wet Location. RoHS Compliant.

Warranty: ELCO Products are built to last. 5-year Limited warranty.

Product Numbers

Item	Lamp type	Lumens	CCT	Watts	Finish
E442L0827W2	LED	850 lm	2700K	8.8W	All White
E442L0827H2	LED	850 lm	2700K	8.8W	Haze with White Trim
E442L0830W2	LED	850 lm	3000K	8.8W	All White
E442L0830H2	LED	850 lm	3000K	8.8W	Haze with White Trim
E442L0835W2	LED	850 lm	3500K	8.8W	All White
E442L0835H2	LED	850 lm	3500K	8.8W	Haze with White Trim
E442L0840W2	LED	850 lm	4000K	8.8W	All White
E442L0840H2	LED	850 lm	4000K	8.8W	Haze with White Trim
E442L0850W2	LED	850 lm	5000K	8.8W	All White
E442L0850H2	LED	850 lm	5000K	8.8W	Haze with White Trim
E442L08SDW	LED	850 lm	SunsetK	8.8W	All White
E442L08SDH	LED	850 lm	SunsetK	8.8W	Haze with White Trim
E442L1227W2	LED	1250 lm	2700K	12.8W	All White
E442L1227H2	LED	1250 lm	2700K	12.8W	Haze with White Trim
E442L1230W2	LED	1250 lm	3000K	12.8W	All White

Item	Lamp type	Lumens	CCT	Watts	Finish
E442L1230H2	LED	1250 lm	3000K	12.8W	Haze with White Trim
E442L1235W2	LED	1250 lm	3500K	12.8W	All White
E442L1235H2	LED	1250 lm	3500K	12.8W	Haze with White Trim
E442L1240W2	LED	1250 lm	4000K	12.8W	All White
E442L1240H2	LED	1250 lm	4000K	12.8W	Haze with White Trim
E442L1250W2	LED	1250 lm	5000K	12.8W	All White
E442L1250H2	LED	1250 lm	5000K	12.8W	Haze with White Trim
E442L12SDW	LED	1250 lm	SunsetK	12.8W	All White
E442L12SDH	LED	1250 lm	SunsetK	12.8W	Haze with White Trim
E442L1627W2	LED	1600 lm	2700K	18W	All White
E442L1627H2	LED	1600 lm	2700K	18W	Haze with White Trim
E442L1630W2	LED	1600 lm	3000K	18W	All White
E442L1630H2	LED	1600 lm	3000K	18W	Haze with White Trim
E442L1635W2	LED	1600 lm	3500K	18W	All White
E442L1635H2	LED	1600 lm	3500K	18W	Haze with White Trim
E442L1640W2	LED	1600 lm	4000K	18W	All White
E442L1640H2	LED	1600 lm	4000K	18W	Haze with White Trim
E442L1650W2	LED	1600 lm	5000K	18W	All White
E442L1650H2	LED	1600 lm	5000K	18W	Haze with White Trim
E442L16SDW	LED	1600 lm	SunsetK	18W	All White
E442L16SDH	LED	1600 lm	SunsetK	18W	Haze with White Trim
E442L2027W2	LED	2000 lm	2700K	21.6W	All White
E442L2027H2	LED	2000 lm	2700K	21.6W	Haze with White Trim
E442L2030W2	LED	2000 lm	3000K	21.6W	All White
E442L2030H2	LED	2000 lm	3000K	21.6W	Haze with White Trim
E442L2035W2	LED	2000 lm	3500K	21.6W	All White
E442L2035H2	LED	2000 lm	3500K	21.6W	Haze with White Trim
E442L2040W2	LED	2000 lm	4000K	21.6W	All White
E442L2040H2	LED	2000 lm	4000K	21.6W	Haze with White Trim
E442L2050W2	LED	2000 lm	5000K	21.6W	All White
E442L2050H2	LED	2000 lm	5000K	21.6W	Haze with White Trim
E442L20SDW	LED	2000 lm	SunsetK	21.6W	All White
E442L20SDH	LED	2000 lm	SunsetK	21.6W	Haze with White Trim
E442L3027W2	LED	3000 lm	2700K	31W	All White
E442L3027H2	LED	3000 lm	2700K	31W	Haze with White Trim
E442L3030W2	LED	3000 lm	3000K	31W	All White
E442L3030H2	LED	3000 lm	3000K	31W	Haze with White Trim
E442L3035W2	LED	3000 lm	3500K	31W	All White
E442L3035H2	LED	3000 lm	3500K	31W	Haze with White Trim
E442L3040W2	LED	3000 lm	4000K	31W	All White
E442L3040H2	LED	3000 lm	4000K	31W	Haze with White Trim
E442L3050W2	LED	3000 lm	5000K	31W	All White
E442L3050H2	LED	3000 lm	5000K	31W	Haze with White Trim
E442L30SDW	LED	3000 lm	SunsetK	31W	All White
E442L30SDH	LED	3000 lm	SunsetK	31W	Haze with White Trim

Item	Lamp type	Lumens	CCT	Watts	Finish
E442L4030W2	LED	4000 lm	3000K	36.8W	All White
E442L4030H2	LED	4000 lm	3000K	36.8W	Haze with White Trim
E442L4035W2	LED	4000 lm	3500K	36.8W	All White
E442L4035H2	LED	4000 lm	3500K	36.8W	Haze with White Trim
E442L4040W2	LED	4000 lm	4000K	36.8W	All White
E442L4040H2	LED	4000 lm	4000K	36.8W	Haze with White Trim
E442L4050W2	LED	4000 lm	5000K	36.8W	All White
E442L4050H2	LED	4000 lm	5000K	36.8W	Haze with White Trim
E442L40SDW	LED	4000 lm	SunsetK	36.8W	All White
E442L40SDH	LED	4000 lm	SunsetK	36.8W	Haze with White Trim

Product Number Builder Example: **E442L0827W2**

ELCO 4" Square Wall
Wash Reflector

Lumens

Color Temp.

Finish

Generation

Beam Angle

E442L

08 850 lm

12 1250 lm

16 1600 lm

20 2000 lm

30 3000 lm

40 4000 lm

27 2700K (Up to 3000
lm) ¹

30 3000K

35 3500K

40 4000K

50 5000K

SD Sunset ^{1, 2}

W All White

2 Gen 2

1 Gen 1

60° lens

-F 38° lens ¹

-N 24° lens ¹

-S 15° lens ¹

¹ Available for lumen packages up to 3000 lm only


² Sunset, Dim to Warm technology, automatically transitions from 3000K to 1800K when dimmed

Compatible Products

For use with 4" Laurel™ Square Light Engines




4" Laurel™ Commercial Square LED Frames



E4SQLH

4" Square Architectural Frame

* Hanger bars ordered separately

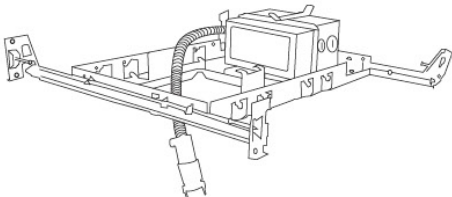

E4SQLF

4" Square Plaster Frame

PRODUCT NUMBER BUILDER

Frame Type	Voltage	Lumen	Dimming	Optional	Generation
<div>E4SQLH Architectural</div>	<div>U 120/277V</div>	<div>08 850 lm</div>	<div>D 0-10/Triac/ELV</div>	<div>EM1 Emergency Backup up to 700 lm output</div>	<div>(Blank) Gen 1</div>
<div>E4SQLF Plaster</div>		<div>12 1250 lm</div>		<div>EM2 Emergency Backup up to 1100 lm output</div>	<div>2 Gen 2</div>
		<div>16 1600 lm</div>			
		<div>20 2000 lm</div>			
		<div>30 3000 lm</div>			
		<div>40 4000 lm</div>			